
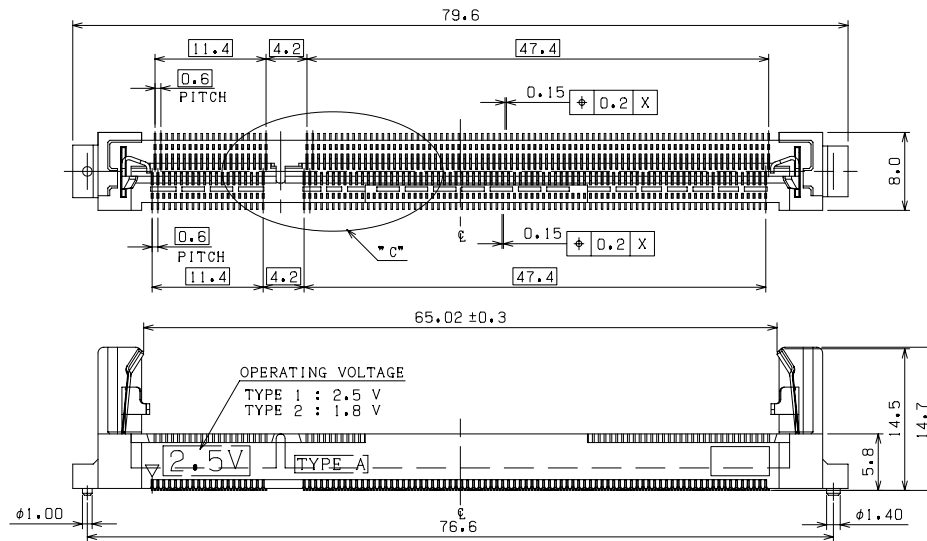


TYPE 1
POWER SUPPLY 2.5 V

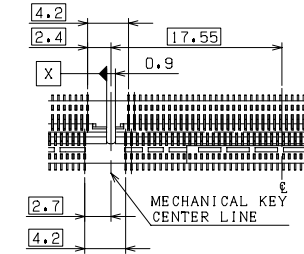

TYPE 2
POWER SUPPLY 1.8 V


DETAIL C MECHANICAL KEY TYPE

NOTES.



- 材質: ハウジング: LCP樹脂、UL94V-0、色: 自然色
コンタクト: リン青銅
メタルラッチ: ステンレス
MATERIAL: HOUSING: LCP, UL94V-0, COLOR: NATURAL
CONTACT: PHOS-BRO
METAL LATCH: SUS
- メッキ: コンタクト: 金メッキ(接点部)、ニッケル下地
PLATING: CONTACT (CONTACT POINT): Au PLATE
NI UNDER PLATE

△ コンタクトを平面に置き、端子半田付け部の浮きは、0.1mm以下
MUST BE MEASURED FLOATING AMOUNT OF CONTACT TAILS
FROM DATUM SURFACE IS 0.1mm MAX.

△ 公差非累積
TOLERANCES NON-CUMULATIVE

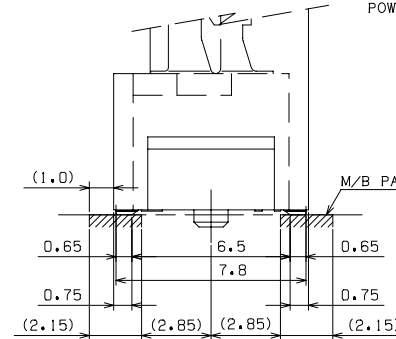

コンタクト接地長

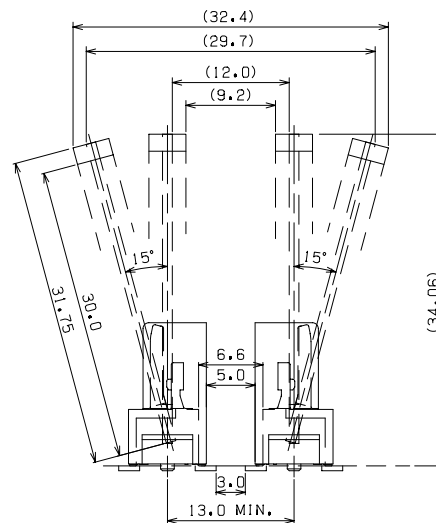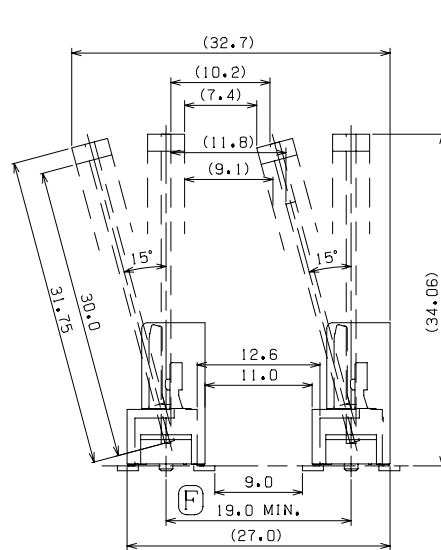

推奨 SOCKET レイアウト寸法

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ±
.XXX ±
ANG ± 3°

照片框

ORDER INFORMATION

SDM6-V80Vxx-40A6-LF

SERIES

LEADFREE

200 WAY

V18:1.8V

V25:2.5V

WIDTH 8.0mm






180°SMT

DESCRIPTION: DDR S.O DIMM SOCKET VERTICAL
TYPE A FOR 200PIN DDR S.O DIMM


MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

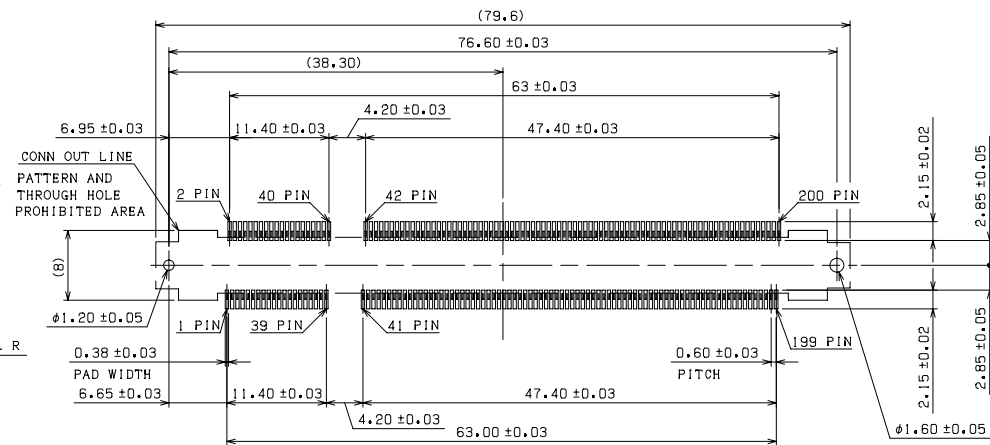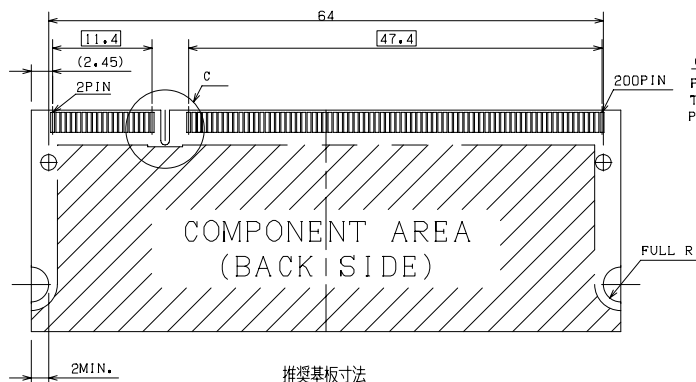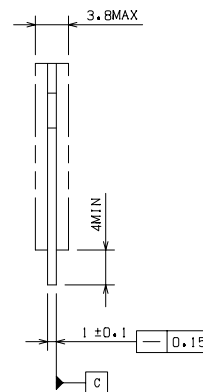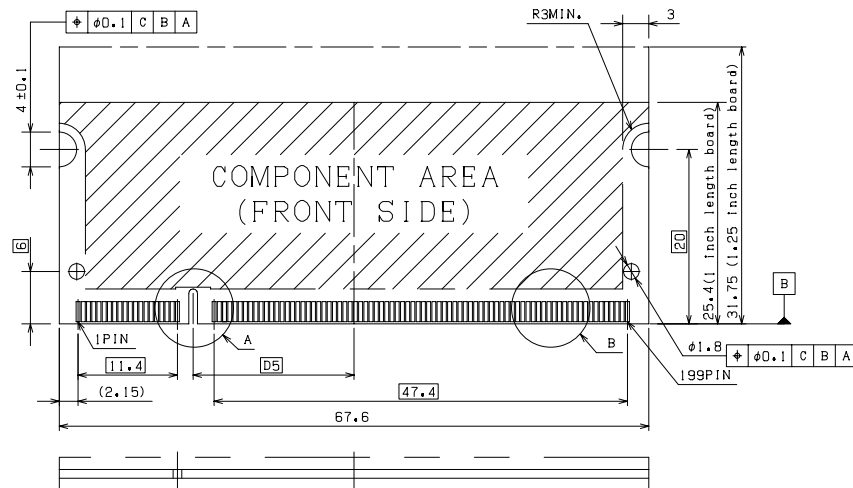

1.8V	17.55	2.4	2.7
2.5V	18.45	1.5	1.8
POWER SUPPLY	D5	D4	D3

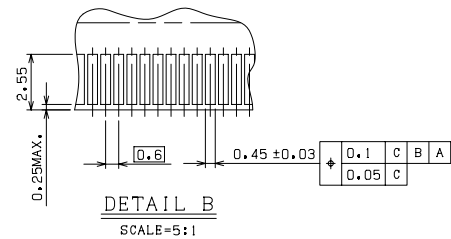

注記: (SHEET 2 に適用)
NOTES: (APPLIED TO SHEET 2)

1. 一般公差 ±0.15
TOLERANCES ON ALL DIMENSION ±0.15 UNLESS OTHERWISE SPECIFIED.

2. 基板厚寸法は、メッキ厚を含む。
P.C. BOARD THICKNESS APPLIES ACROSS TABS AND INCLUDES PLATING AND/OR METALIZATION.

3. パット厚の仕上げ: ニッケル下地メッキ 0.002MIN. 厚の比、金メッキ 0.000756MIN. 厚を施す。
FINISH OF PAD: GOLD PLATING 0.00076MIN. OVER Ni PLATING 0.002MIN.

推奨基板寸法
RECOMMENDED MATING P.C. BOARD DIM.

推奨基板レイアウト寸法
RECOMMENDED MOUNTING LAYOUT DIM.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1:1
DATE
SIZE A4



TOLERANCES ARE
X, ±
.X ± 0.20
.XX ±
.XXX ±
ANG ± 3°
PPOJECTION

照片框

ORDER INFORMATION

SDM6-V80Vxx-40A6-LF
SERIES
LEADFREE
200 WAY
V18:1.8V
V25:2.5V
WIDTH 8.0mm
180°SMT

DESCRIPTION: DDR S.O DIMM SOCKET VERTICAL
TYPE A FOR 200PIN DDR S.O DIMM

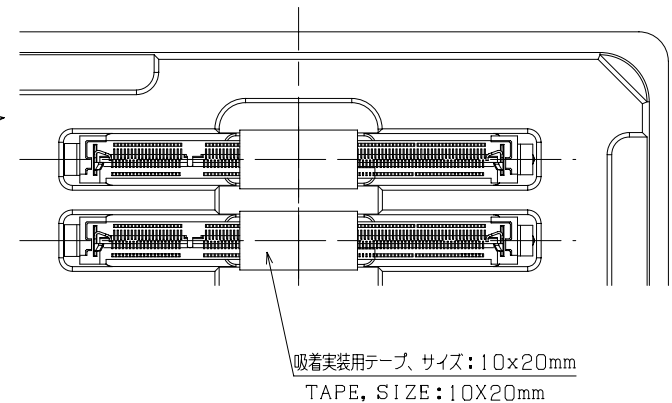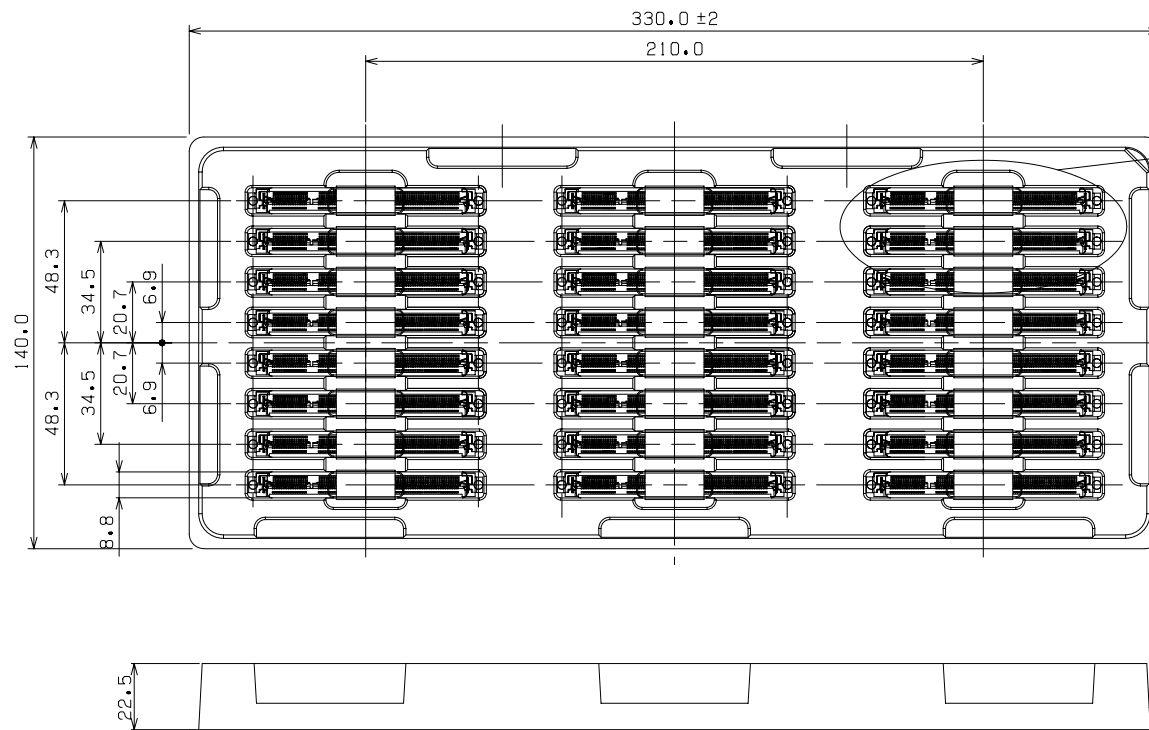

24	TYPE 2	SDM6-V80V18-40A6
24	TYPE 1	SDM6-V80V25-40A6
QTY.	KEY TYPE	PART NO. OF CONNECTOR

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.20
.XX ±
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

SDM6-V80Vxx-40A6-LF

SERIES
LEADFREE
200 WAY
V18:1.8V
V25:2.5V
WIDTH 8.0mm
180°SMT

DESCRIPTION: DDR S.O DIMM SOCKET VERTICAL
TYPE A FOR 200PIN DDR S.O DIMM