


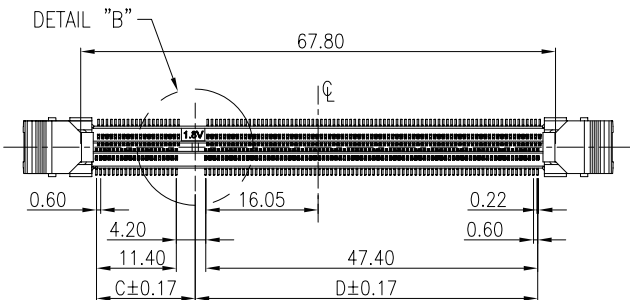
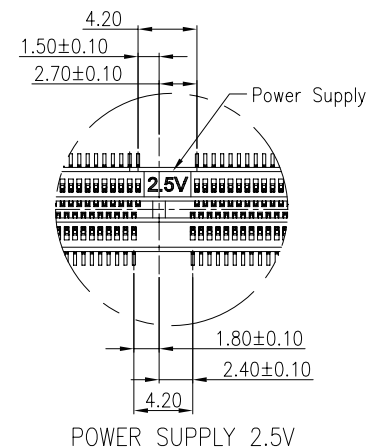
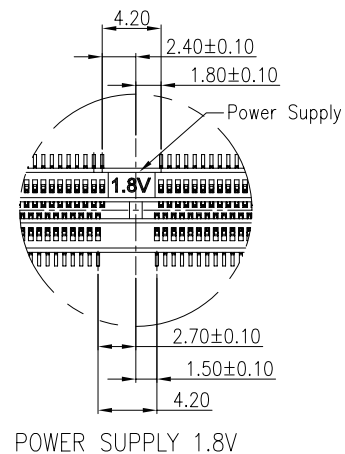



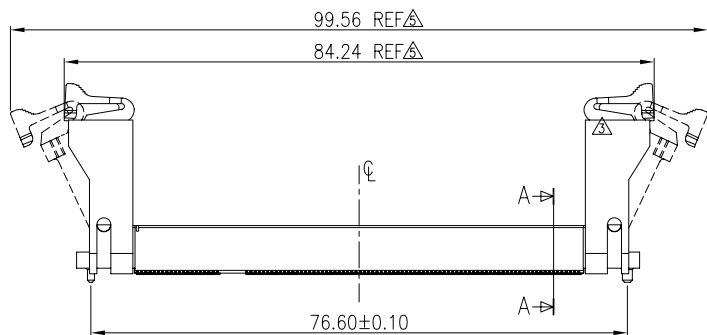

	C±0.17	D±0.17
1.8V	14.10	48.90
2.5V	13.20	49.80

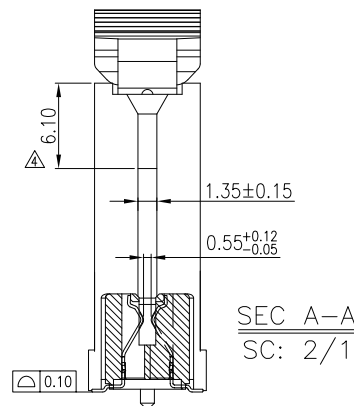

DETAIL "B"

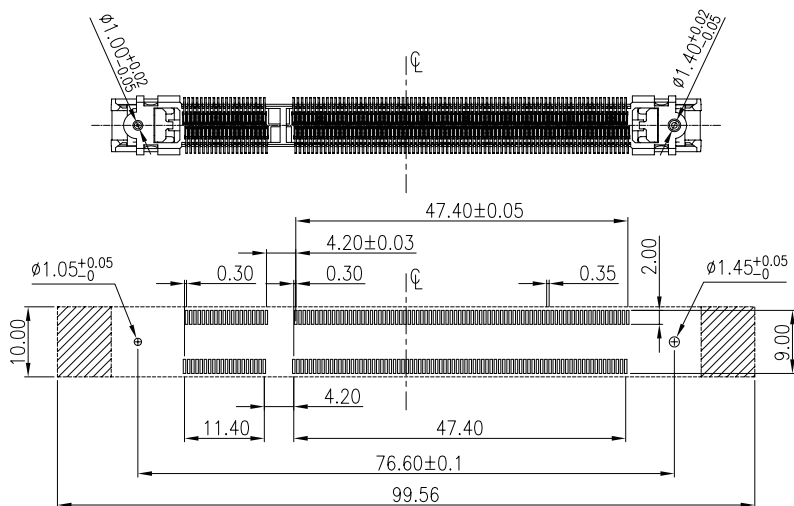

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SDM6-V84Vxx-40A6-LF

SERIES

LEADFREE

200 WAY



V18:1.8V

V25:2.5V

WIDTH 84.24mm

180°SMT

DESCRIPTION:DDR S.O.DIMM SOCKET 0.6MM PITCH,200PIN VERTICAL SMT TYPE 7.0 MM HEIGHT

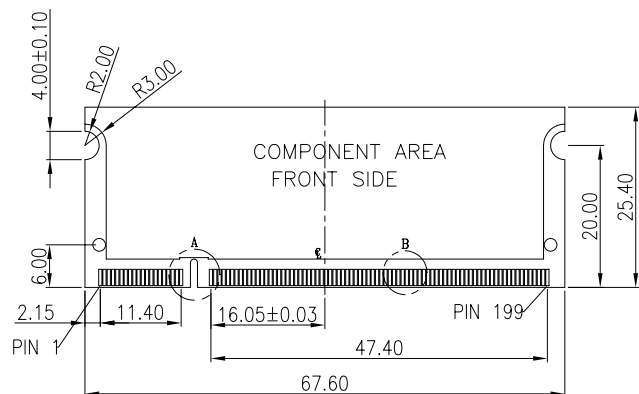

MATERIAL:




HOUSING : HIGH TEMPERATURE THERMO PLASTIC
UL94V-0,COLOR: BLACK.

EAR LOCK : HIGH TEMPERATURE THERMO PLASTIC
UL94V-0,COLOR: IVORY OR BLACK.




CONTACT : PHOSPHOR BRONZE , T=0.2±0.01

FINISH :

CONTACT : GOLD PLATED ON CONTACT AREA &
120u" MIN. TIN/LEAD OR SN ONLY
PLATED ON SOLDERING END OVER
30u" MIN. NICKEL UNDER-PLATEING.

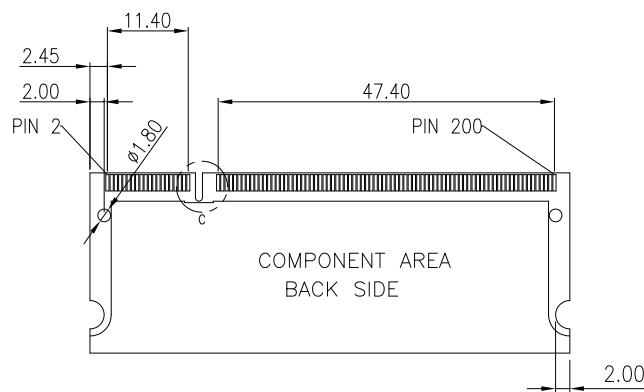

DETAIL A



DETAIL C

RECOMMENDED MODULE CONFIGURATION.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SDM6-V84Vxx-40A6-LF

SERIES

LEADFREE

200 WAY

V18:1.8V

V25:2.5V

WIDTH 84.24mm

180°SMT

DESCRIPTION:DDR S.O.DIMM SOCKET 0.6MM PITCH,200PIN VERTICAL SMT TYPE 7.0 MM HEIGHT