
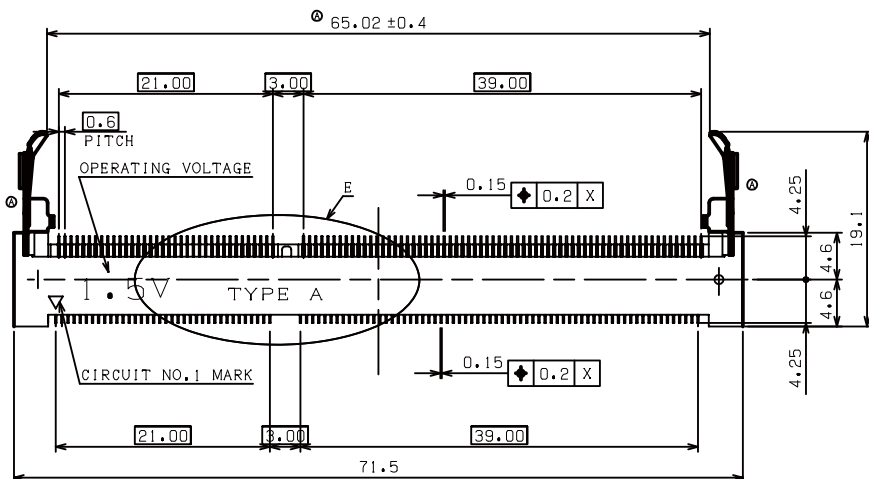


1.5V

POWER SUPPLY

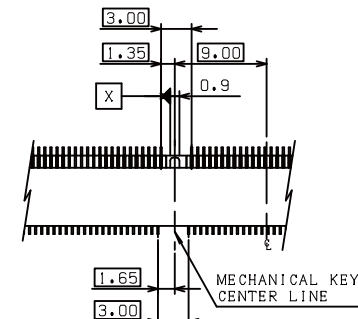

DETAIL E
MECHANICAL KEY TYPE

NOTES.

1. 材質: ハウジング: LCP樹脂, UL94V-0, 色: 黒色
コンタクト: 銅合金
メタルラッチ: ステンレス
MATERIAL: HOUSING: LCP, UL94V-0, COLOR: BLACK
CONTACT: COPPER ALLOY
METAL LATCH: SUS
メッキ: コンタクト (接点部, 半田付け部): 金メッキ 0.0075μm MIN, ニッケル下地 1.5μm MIN.
PLATING: CONTACT (CONTACT POINT, SOLDER AREA):
Au PLATE 0.0075μm MIN, Ni UNDER PLATE 1.5μm MIN.
コネクタを平坦面に置き、端子半田付け部の厚さは、0.1mm以下
MUST BE MEASURED FLOATING AMOUNT OF CONTACT TAILS
FROM DATUM SURFACE IS 0.1mm MAX.

- 倍率適用外寸法
NOT TO SCALE.
公差非累積
TOLERANCES NON-CUMULATIVE
他社のソケット用
FOR SOCKET OF THE OTHER COMPANIES

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X, ±
.X ± 0.20
.XX ±
.XXX ±
ANG ± 3°



ORDER INFORMATION




SDM6-W52V15-72A3-LF
SERIES | | | LEADFREE
| | | 204 WAY
| | | 1.5V
| | | HIGH 5.2mm
| | | 90°SMT

DESCRIPTION: FOR 204PIN DDR S.O DIMM(DDR3)




DESCRIPTION: FOR 204PIN DDR S.O DIMM(DDR3)

www.morethanall.com

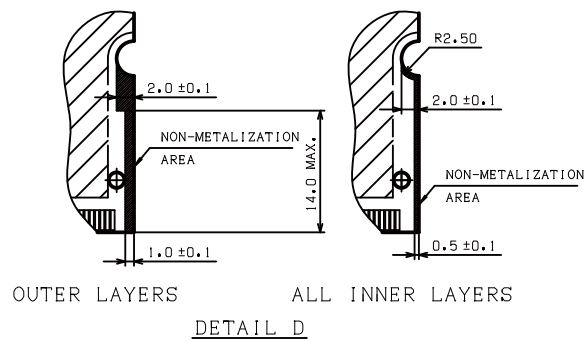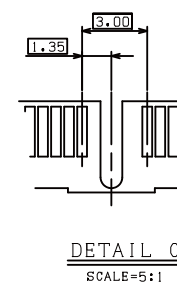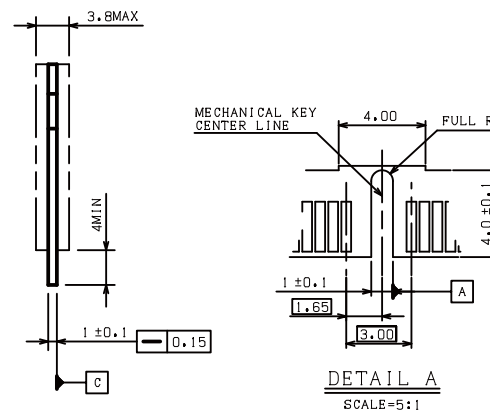

注記: (SHEET 3 に適用)
NOTES: (APPLIED TO SHEET 3)

1. 一般公差 ±0.15
TOLERANCES ON ALL DIMENSION ±0.15 UNLESS OTHERWISE SPECIFIED.
2. 基板銅厚は、タブ厚を含む。
P, C, BOARD THICKNESS APPLIES ACROSS TABS AND INCLUDES PLATING AND/OR METALIZATION.
3. バッパの銅厚は、タブ下地タブキ 0.002MIN. 厚の上げ、金メッキ 0.000756MIN. 厚を指す
FINISH OF PAD : GOLD PLATING 0.000756MIN. OVER NI PLATING 0.002MIN.

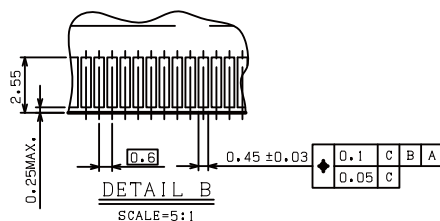

TOLERANCES ARE

$$X_i \pm 0.20$$

.XX ±
 .XXX ±
 ANG ± 3°

SCALE 1 : 1

11/11/2016

PPOJECTION 



ORDER INFORMATION


SERIES 1.5V 204 WAY LEADFREE
HIGH 5.2mm
90°SMT

DESCRIPTION: FOR 204PIN DDR S.O DIMM(DDR3)

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

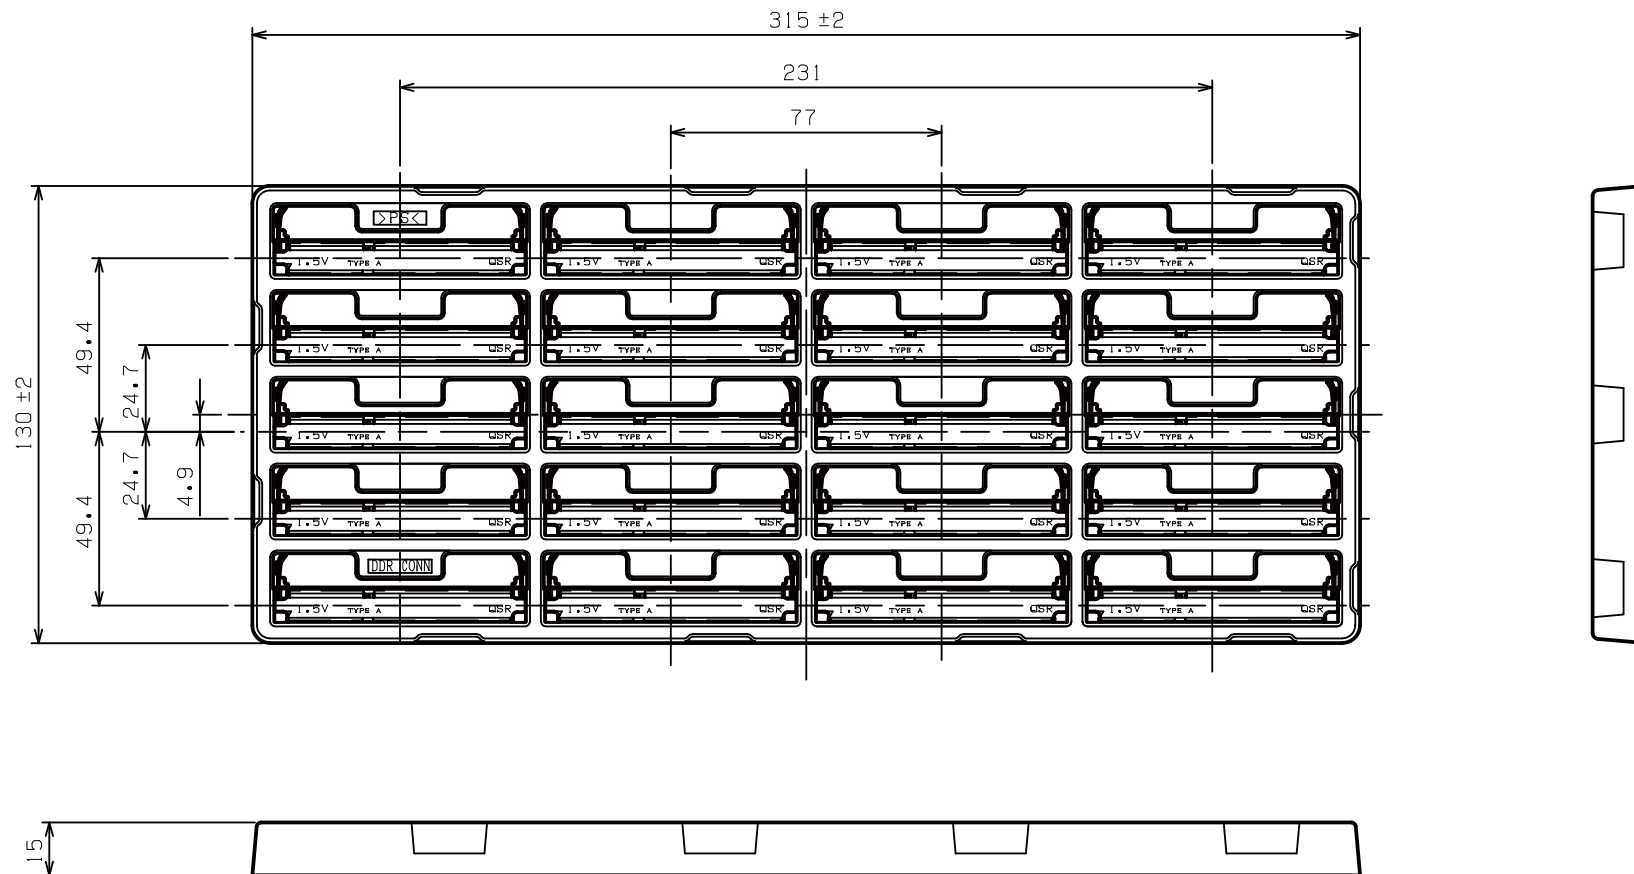

SOFT TRAY PACKAGING

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X ± 0.20
.XX $\pm$
.XXX $\pm$
ANG $\pm 3^\circ$

PPOJECTION $\oplus$



ORDER INFORMATION

SDM6-W52V15-72A3-LF

SERIES
1.5V
HIGH 5.2mm
90°SMT
LEADFREE
204 WAY

DESCRIPTION: FOR 204PIN DDR S.O DIMM(DDR3)