
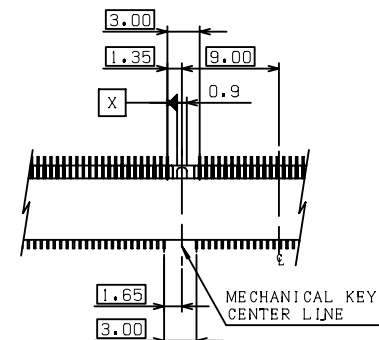
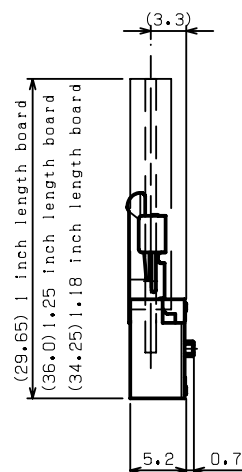


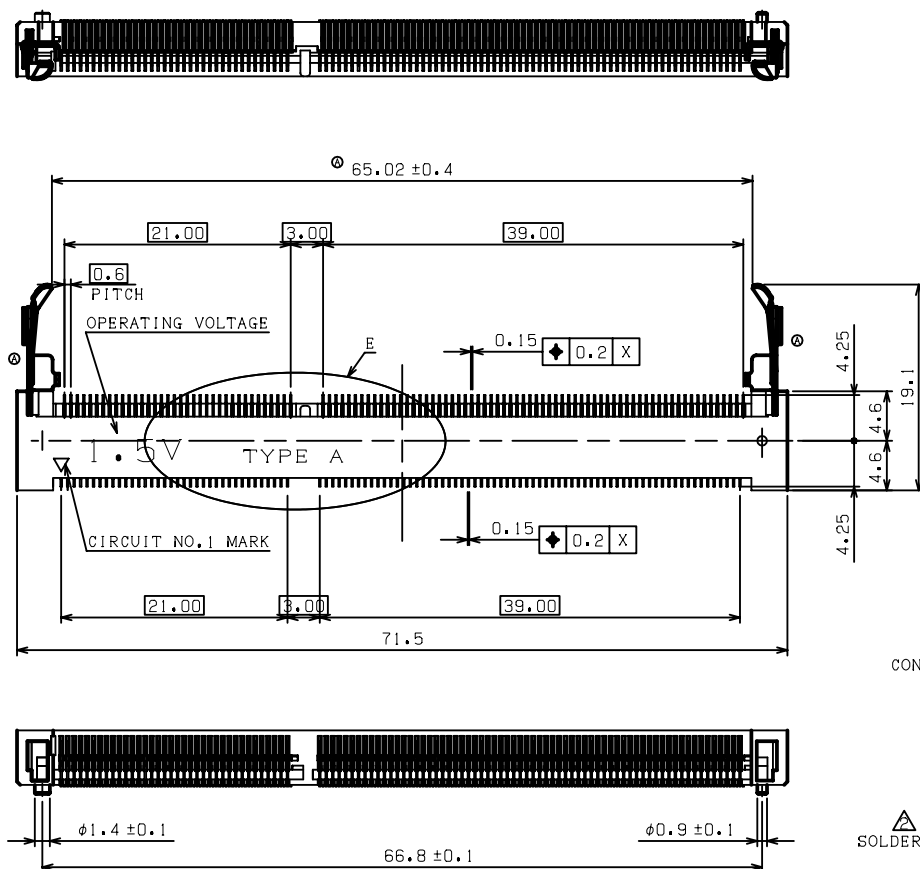

DETAIL E
MECHANICAL KEY TYPE

NOTES.

1. 材質: ハウジング: LCP樹脂、UL94V-0、色: 黒色

コンタクト: 銅合金

メタルラッチ: ステンレス

MATERIAL: HOUSING: LCP, UL94V-0, COLOR: BLACK

CONTACT: COPPER ALLOY

METAL LATCH: SUS

メッキ: コンタクト (接点部、半田付け部): 金メッキ 0.0075μm MIN, ニッケル下地 1.5μm MIN.


PLATING: CONTACT (CONTACT POINT, SOLDER AREA): Au PLATE 0.0075μm MIN, Ni UNDER PLATE 1.5μm MIN.

コネクタを平坦面に置き、端子半田付け部の浮きは、0.1mm以下
MUST BE MEASURED FLOATING AMOUNT OF CONTACT TAILS
FROM DATUM SURFACE IS 0.1mm MAX.

倍率適用外寸法
NOT TO SCALE.

公差非累積
TOLERANCES NON-CUMULATIVE

他社のソケット用
FOR SOCKET OF THE OTHER COMPANIES

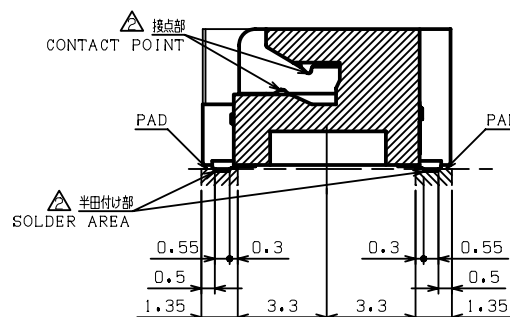

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION

SDM6-W52V15R-72A3-LF

SERIES

LEADFREE


72+132 WAY

90°SMT


1.5V

HIGH: 5.2mm

DESCRIPTION: DDR S.O DIMM SOCKET H=5.2 TYPE A SMALL LATCH
FOR 204PIN DDR S.O DIMM (DDR3)

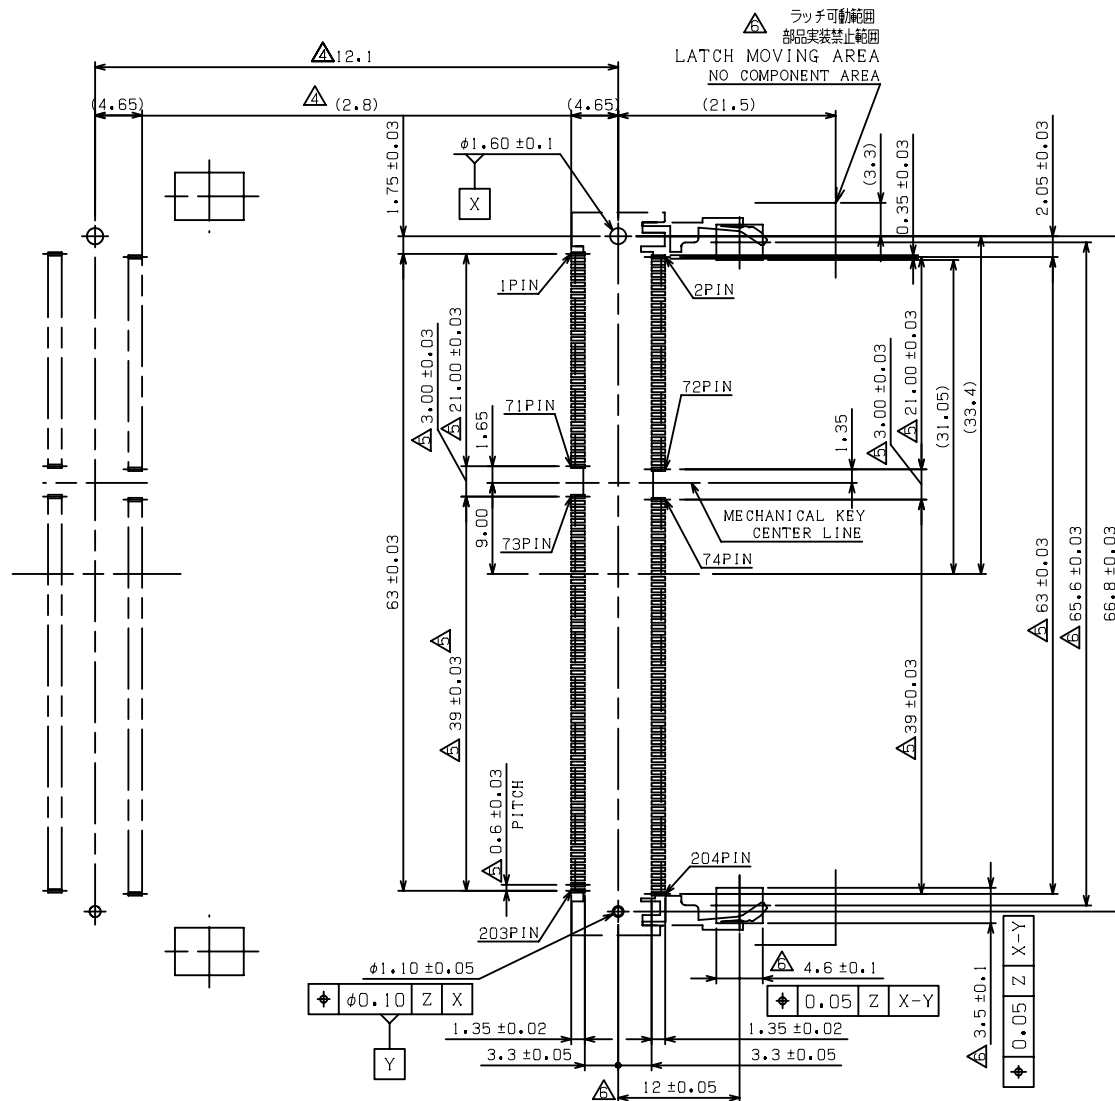

推奨基板レイアウト寸法
RECOMMENDED MOUNTING
P.C. BOARD PATTERN LAYOUT DIM.

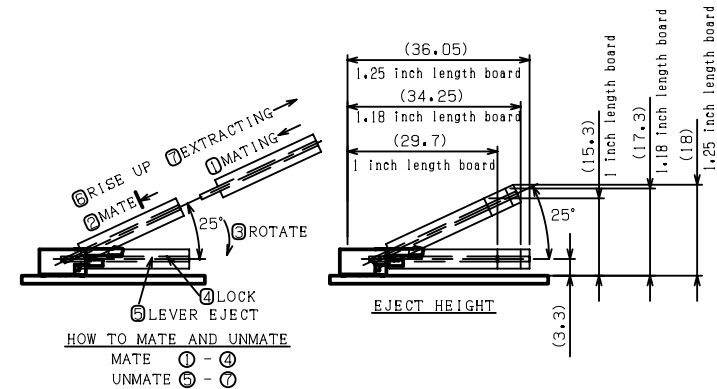

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SDM6-W52V15R-72A3-LF

SERIES

LEADFREE



72+132 WAY

90°SMT






REEL

HIGH:5.2mm

DESCRIPTION: DDR S.O DIMM SOCKET H=5.2 TYPE A SMALL LATCH
FOR 204PIN DDR S.O DIMM (DDR3)

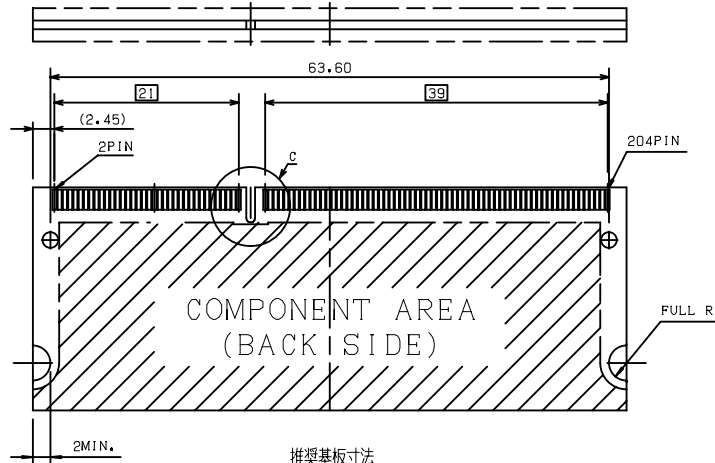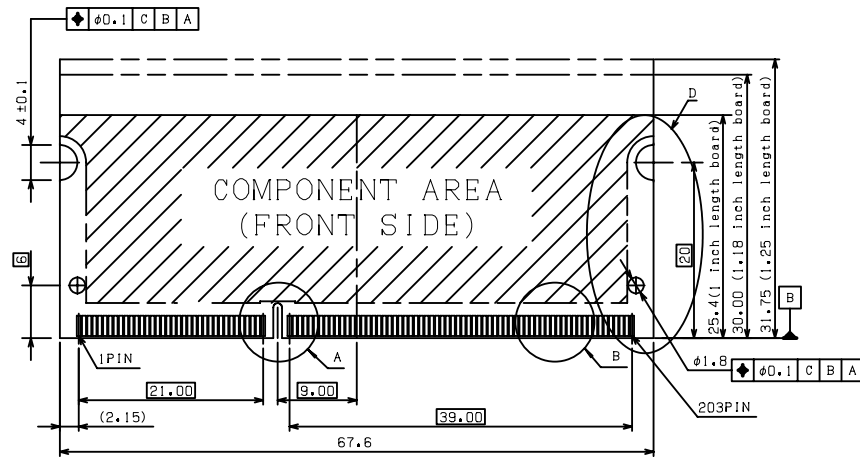

推奨基板寸法
RECOMMENDED MATING
P.C. BOARD DIM.

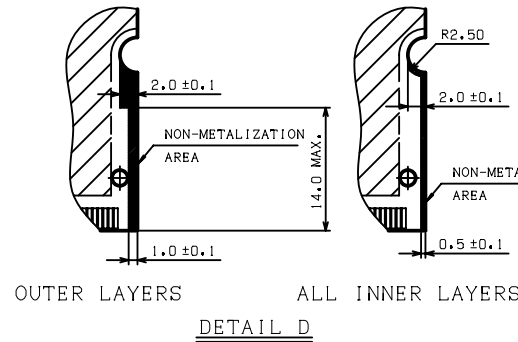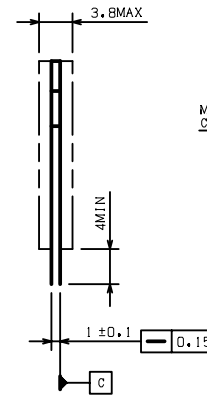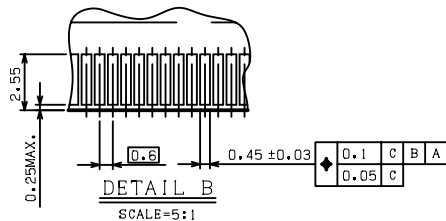

注記: (SHEET 3 に適用)
NOTES: (APPLIED TO SHEET 3)
1. 一般公差±0.15
TOLERANCES ON ALL DIMENSION ±0.15 UNLESS OTHERWISE SPECIFIED.
2. 基板厚寸法は、メッキ厚を含む。
P.C. BOARD THICKNESS APPLIES ACROSS TABS AND INCLUDES PLATING AND/OR METALIZATION.
3. パット部の仕上げ: ニッケル下地メッキ 0.002MIN. 厚の土、金メッキ 0.000756MIN. 厚を施す。
FINISH OF PAD: GOLD PLATING 0.00076MIN. OVER Ni PLATING 0.002MIN.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

RoHS Compliant

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1:1
DATE
SIZE A4 PPOJECTION

TOLERANCES ARE
X. ±
.X ±
.XX ±
.XXX ±
ANG ±



照片框

ORDER INFORMATION

SDM6-W52V15R-72A3-LF
SERIES REEL LEADFREE
72+132 WAY
90°SMT 1.5V
HIGH:5.2mm

DESCRIPTION: DDR S.O DIMM SOCKET H=5.2 TYPE A SMALL LATCH
FOR 204PIN DDR S.O DIMM (DDR3)

DIRECTION OFF TOP OF REEL

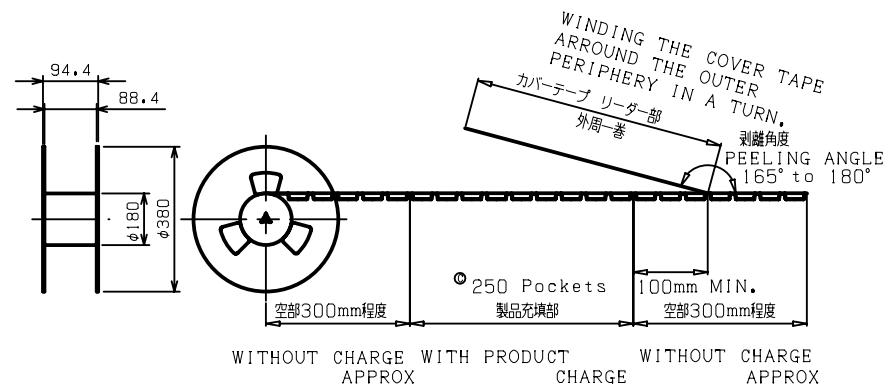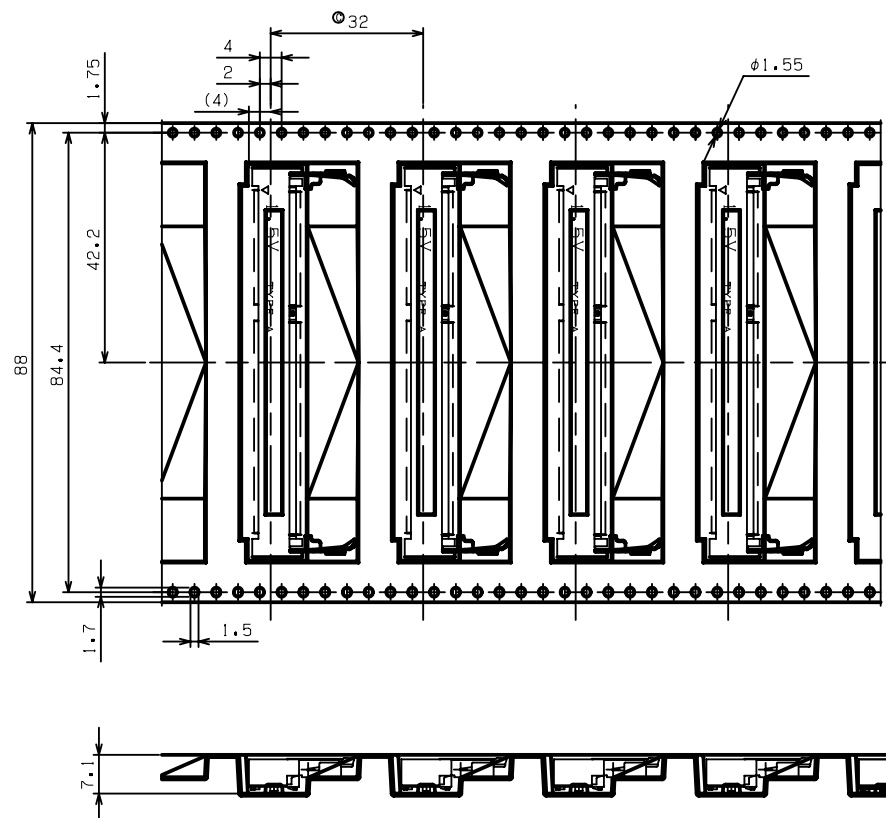

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

SDM6-W52V15R-72A3-LF

SERIES

REEL

1.5V

HIGH:5.2mm

90°SMT

LEADFREE

72+132 WAY

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: DDR S.O DIMM SOCKET H=5.2 TYPE A SMALL LATCH FOR 204PIN DDR S.O DIMM(DDR3)