
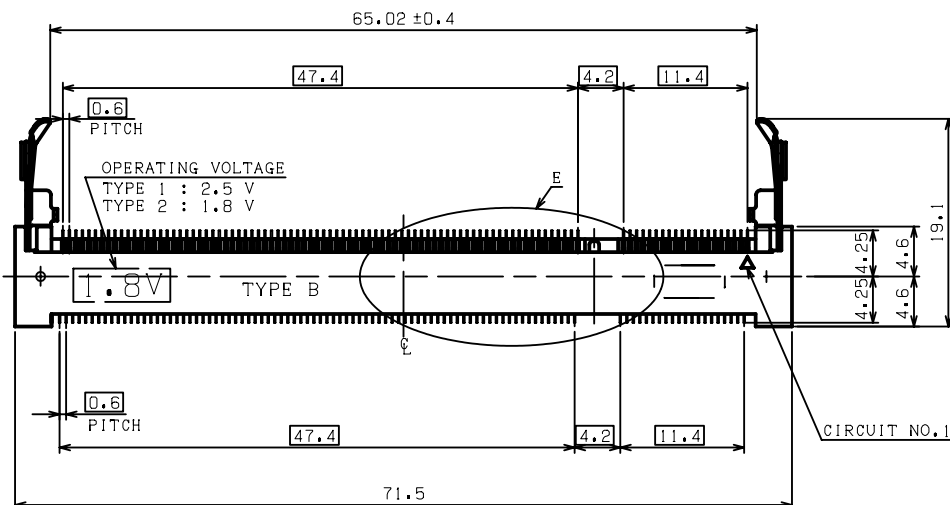

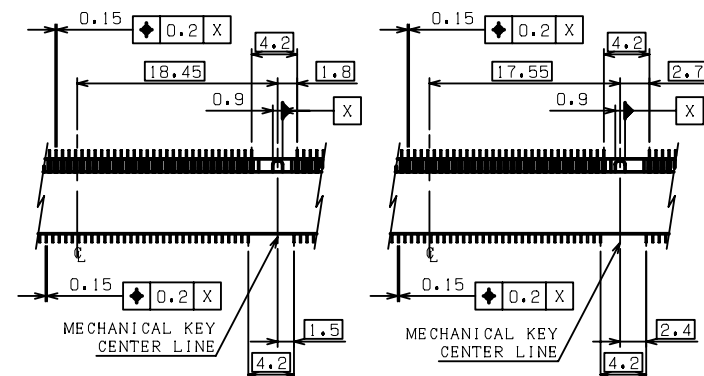


CIRCUIT NO.1 MARK

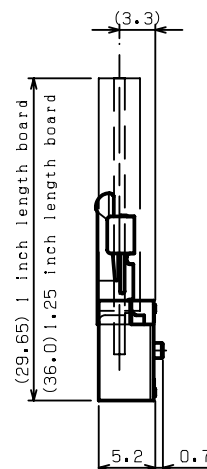

POWER SUPPLY 2.5 V
TYPE 1

POWER SUPPLY 1.8 V
TYPE 2

DETAIL E
MECHANICAL KEY TYPE

1.8V	TYPE 2
2.5V	TYPE 1
POWER SUPPLY	KEY TYPE

NOTES.

- 材質: ハウジング: LCP樹脂、UL94V-0、色: 黒色
コンタクト: 銅合金
メタルラッチ: ステンレス
MATERIAL: HOUSING: LCP, UL94V-0, COLOR: BLACK
CONTACT: COPPER ALLOY
METAL LATCH: SUS
 - メッキ: コンタクト: 金メッキ (接点部、半田付け部) 0.0075μmMIN、ニッケル下地 1.5μmMIN.
PLATING: CONTACT (CONTACT POINT, SOLDER AREA):
Au PLATE 0.0075μmMIN, Ni UNDER PLATE 1.5μmMIN.
- △ コネクタを平坦面に置き、端子半田付け部の浮きは、0.1mm以下
MUST BE MEASURED FLOATING AMOUNT OF CONTACT TAILS
FROM DATUM SURFACE IS 0.1mm MAX.

- △ 倍率適用外寸法
NOT TO SCALE.
- △ 公差非累積
TOLERANCES NON-CUMULATIVE
- △ 他社のソケット用
FOR SOCKET OF THE OTHER COMPANIES

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION




X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SDM6-W52VxxR-A640-LF
SERIES REEL LEADFREE
160+40 WAY
90°SMT V18:1.8V
V25:2.5V
HIGH:5.2mm

DESCRIPTION:

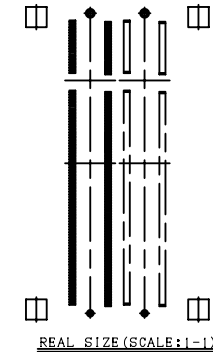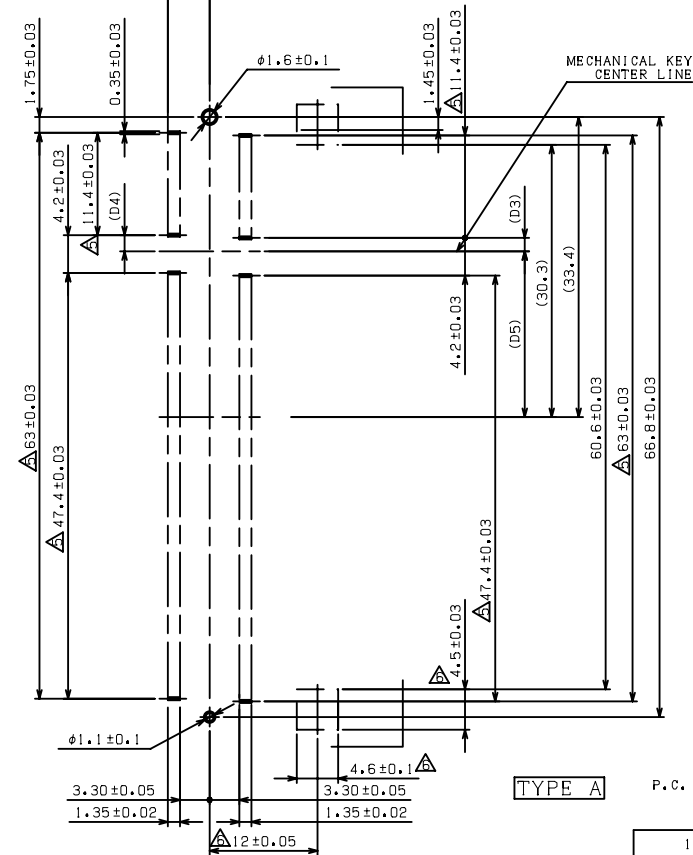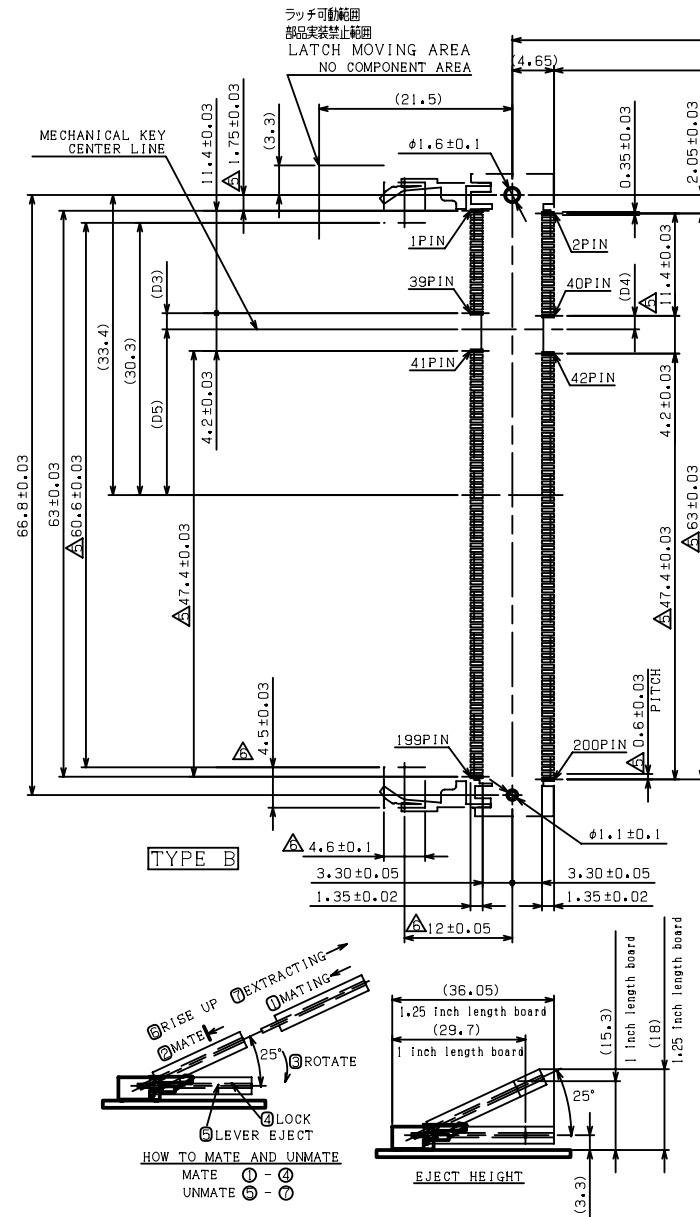

推奨基板レイアウト寸法
RECOMMENDED MOUNTING
P.C. BOARD PATTERN LAYOUT DIM.

1.8V	17.55	2.4	2.7
2.5V	18.45	1.5	1.8
POWER SUPPLY	D5	D4	D3

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

SDM6-W52VxxR-A640-LF
SERIES REEL LEADFREE
90°SMT V18:1.8V V25:2.5V HIGH:5.2mm
160+40 WAY

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1








DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

DESCRIPTION:

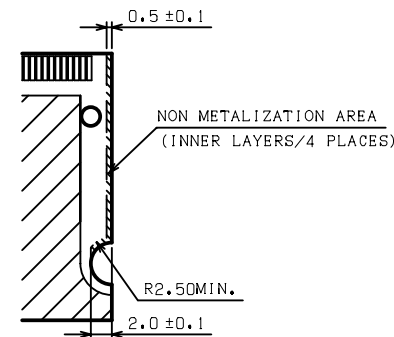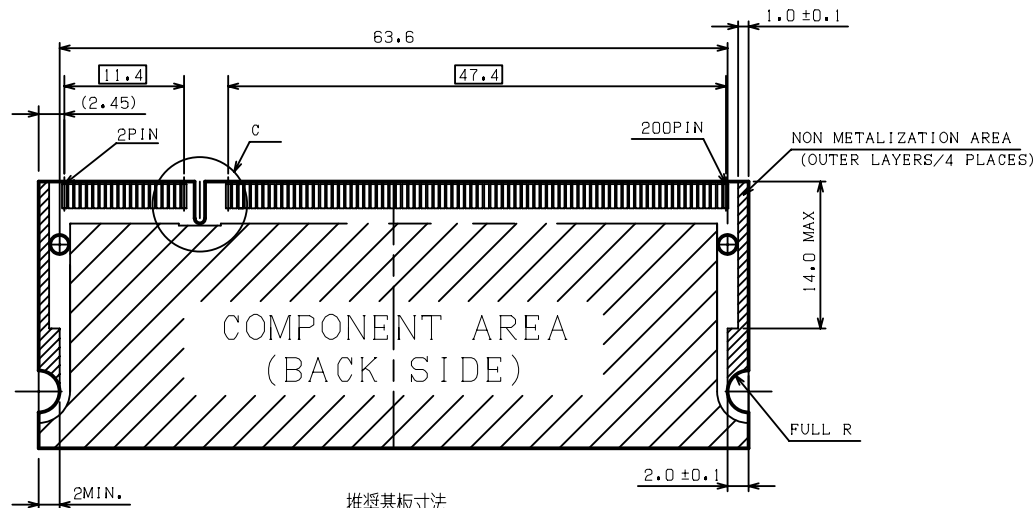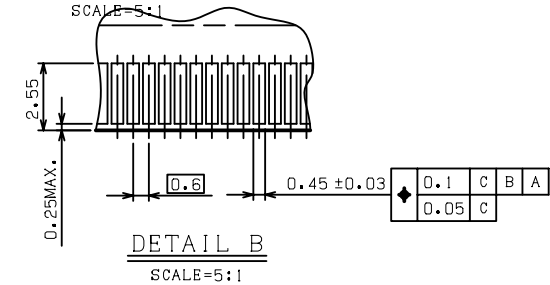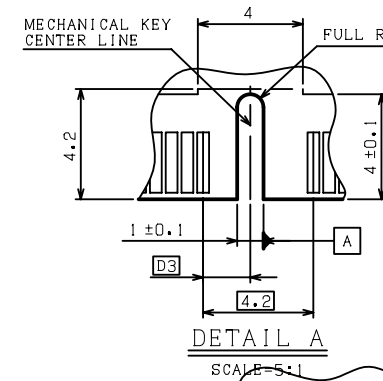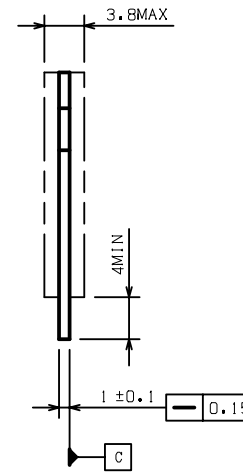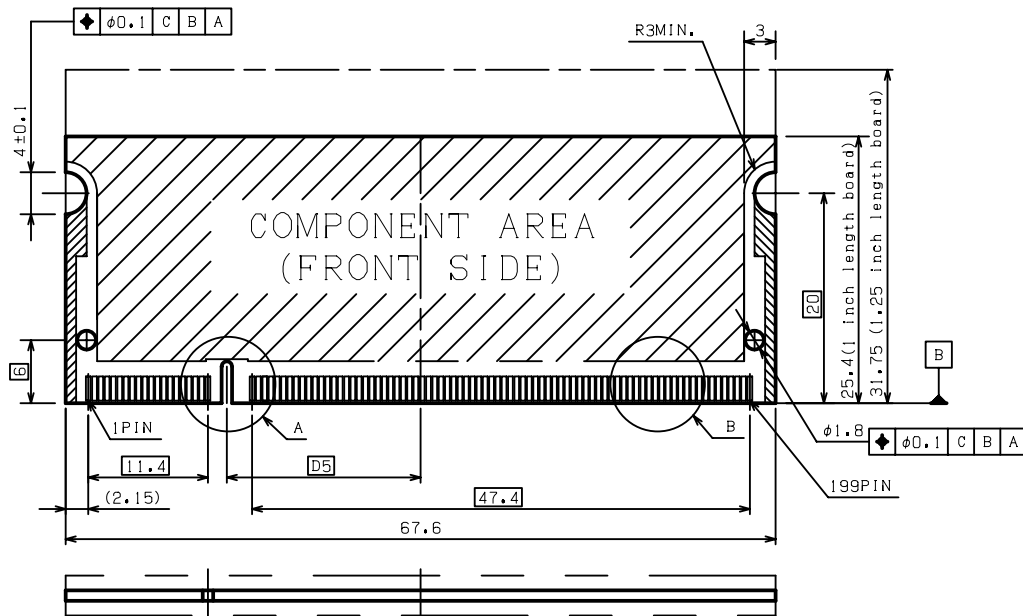

- 注記: (SHEET 3 に適用)
 NOTES: (APPLIED TO SHEET 3)
 1. 一般公差±0.15
 TOLERANCES ON ALL DIMENSION ±0.15 UNLESS OTHERWISE SPECIFIED.
 2. 基板厚寸法は、メッキ厚を含む。
 P.C. BOARD THICKNESS APPLIES ACROSS TABS AND INCLUDES PLATING AND/OR METALIZATION.
 3. パット部の仕上げ: ニッケル下地メッキ 0.002MIN. 厚の上、全メッキ 0.000756MIN. 厚を施す。
 FINISH OF PAD: GOLD PLATING 0.00076MIN. OVER Ni PLATING 0.002MIN.

1.8V	17.55	2.4	2.7
2.5V	18.45	1.5	1.8
POWER SUPPLY	D5	D4	D3

推奨基板寸法
 RECOMMENDED MATING
 P.C. BOARD DIM.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±
 X, ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION


照片框

ORDER INFORMATION

SDM6-W52VxxR-A640-LF

SERIES REEL LEADFREE
 90°SMT V18:1.8V V25:2.5V HIGH:5.2mm
 160+40 WAY

DESCRIPTION:



DESCRIPTION:

SDM6-W52VxxR-A640-LF

SERIES REEL 160+40 WAY LEADFREE

90°SMT V18:1.8V V25:2.5V HIGH:5.2mm