


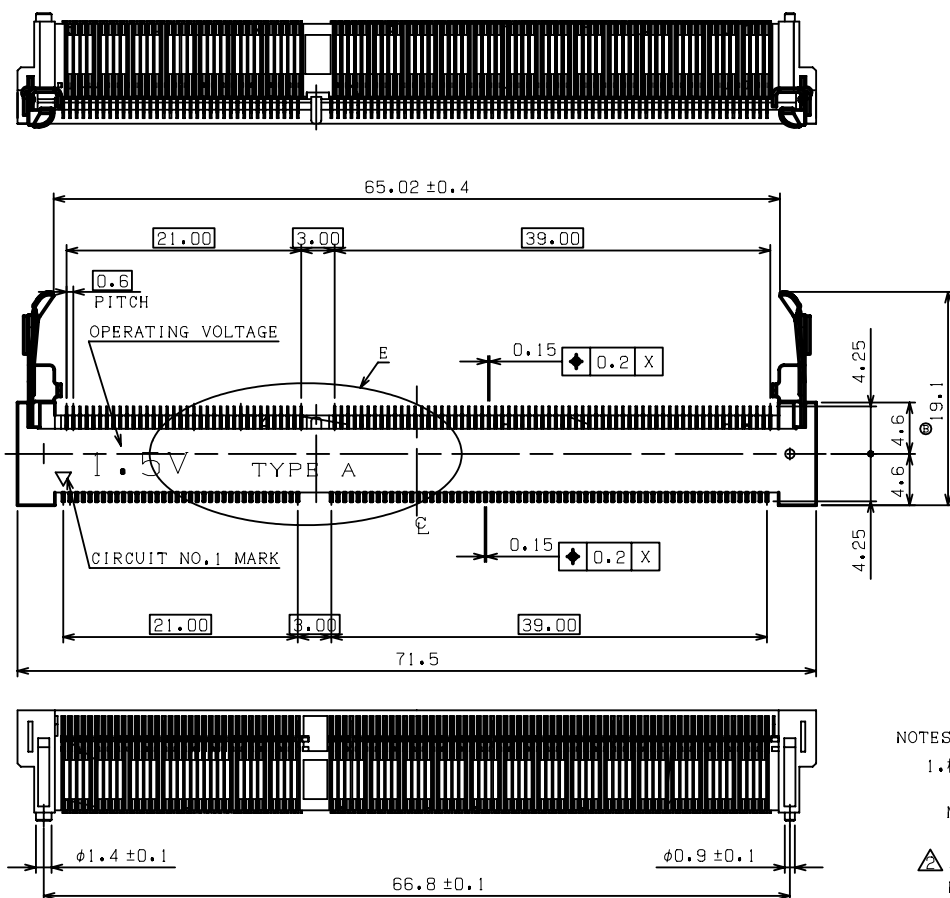

NOTES.

1. 材質: ハウジング: LCP樹脂、UL94V-0、色: 黒色

コンタクト: 銅合金

メタルラッチ: ステンレス

MATERIAL: HOUSING: LCP, UL94V-0, COLOR: BLACK

CONTACT: COPPER ALLOY

METAL LATCH: SUS

メッキ: コンタクト (接点部、半田付け部): 金メッキ 0.0075 μm MIN, ニッケル下地 1.5 μm MIN.

PLATING: CONTACT (CONTACT POINT, SOLDER AREA):

Au PLATE 0.0075 μm MIN, Ni UNDER PLATE 1.5 μm MIN.

コネクタを平坦面に置き、端子半田付け部の浮きは、0.1mm以下
MUST BE MEASURED FLOATING AMOUNT OF CONTACT TAILS
FROM DATUM SURFACE IS 0.1mm MAX.

倍率適用外寸法


NOT TO SCALE.

公差非累積


TOLERANCES NON-CUMULATIVE

他社のソケット用

FOR SOCKET OF THE OTHER COMPANIES

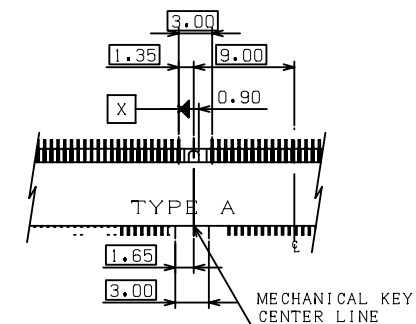

DETAIL E

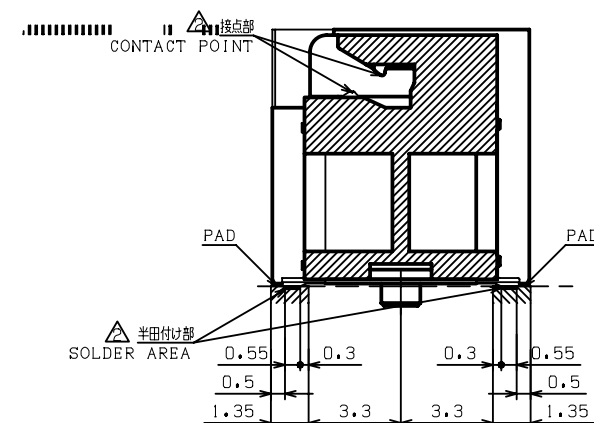

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SDM6-W92V15R-72A3-LF

SERIES

LEADFREE

72+132 WAY

90°SMT




REEL

1.5V

HIGH: 9.2mm

DESCRIPTION:

DDR S.O DIMM SOCKET H=9.2 TYPE A SMALL LATCH
FOR 204PIN DDR S.O DIMM(DDR3)

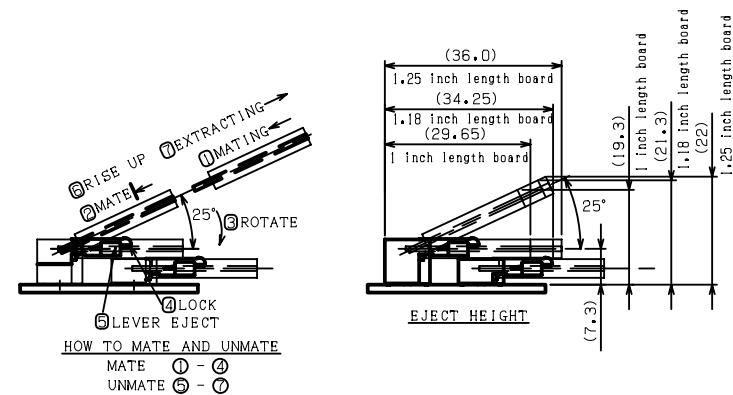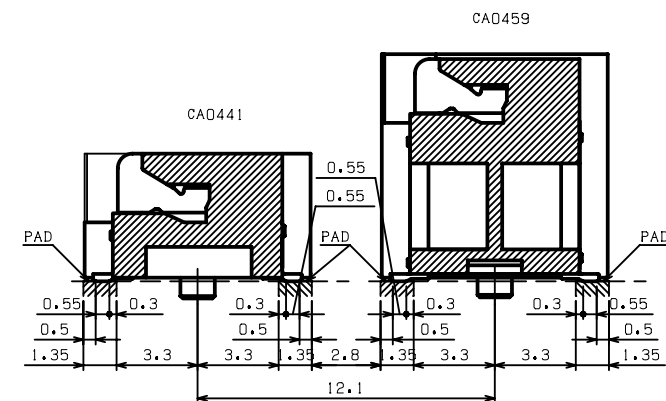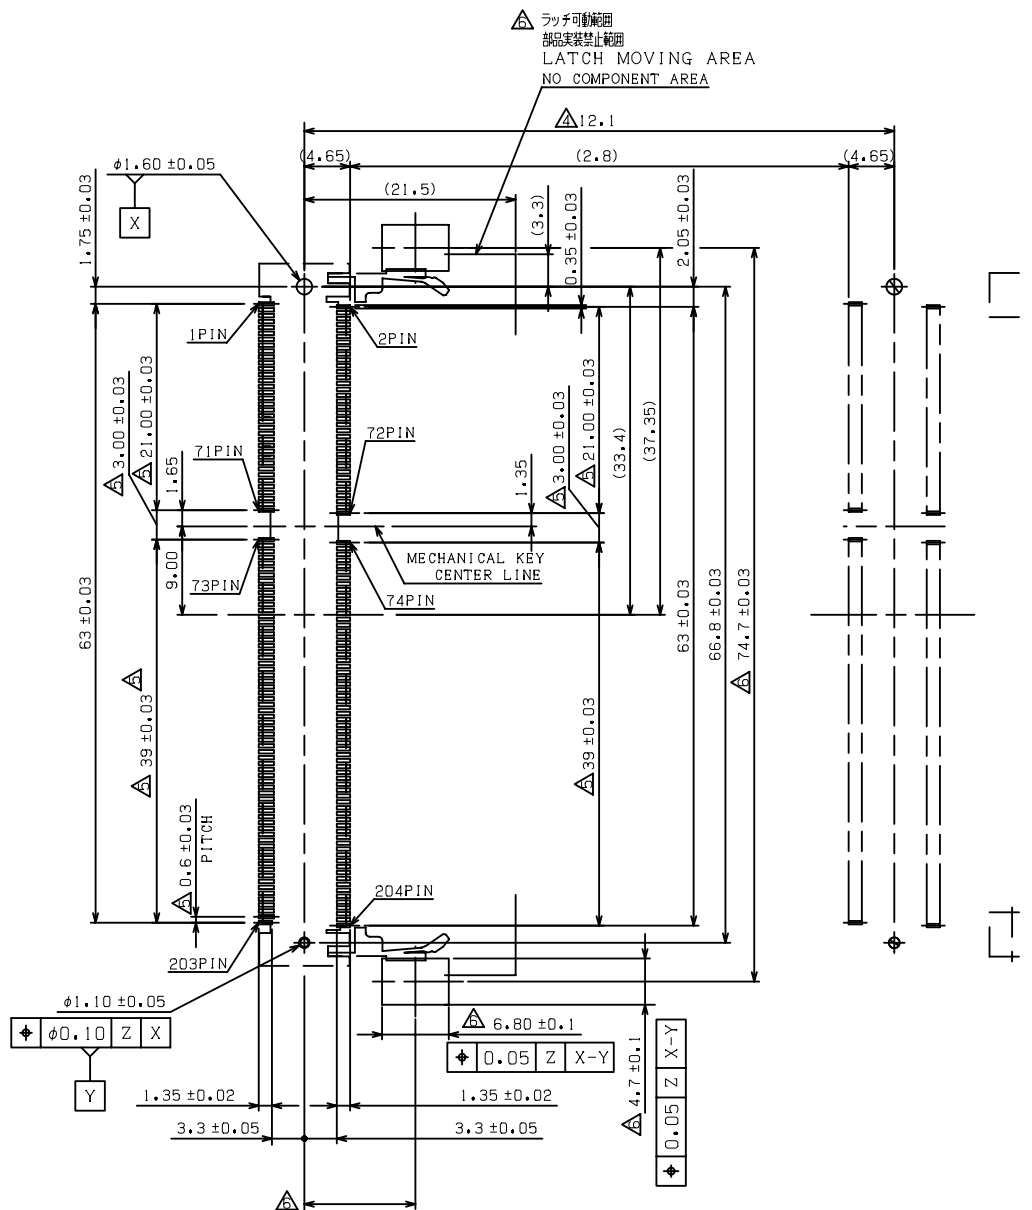

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

SDM6-W92V15R-72A3-LF

SERIES

LEADFREE

72+132 WAY






90°SMT

REEL



1.5V

HIGH:9.2mm

DESCRIPTION: DDR S.O DIMM SOCKET H=9.2 TYPE A SMALL LATCH FOR 204PIN DDR S.O DIMM(DDR3)

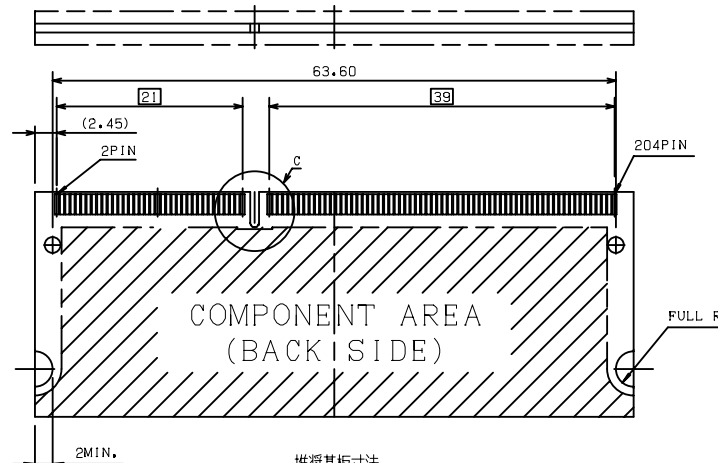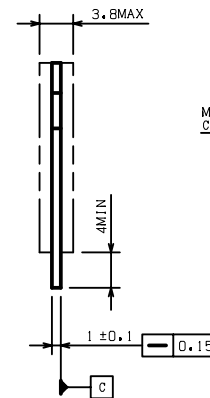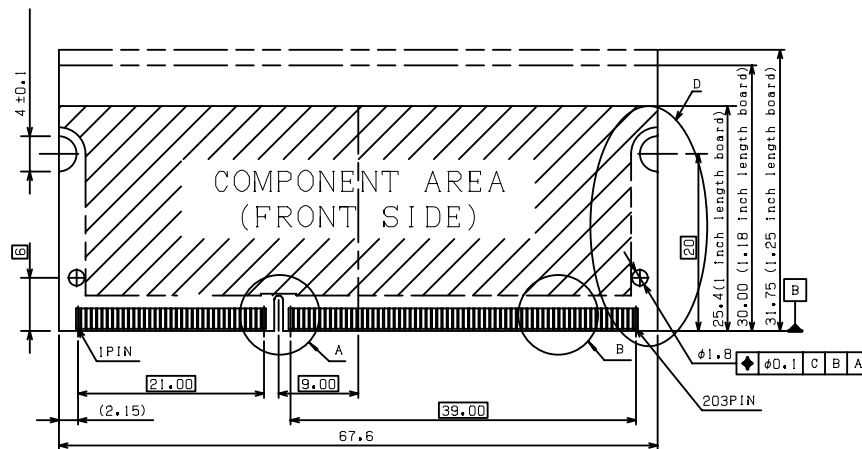

推奨基板寸法
RECOMMENDED MATING
P.C. BOARD DIM.

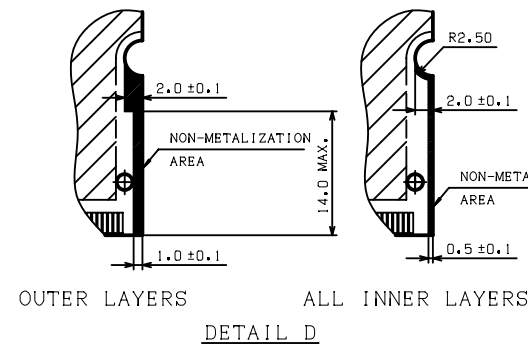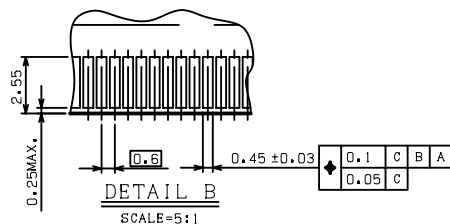

注記: (SHEET 3 に適用)
NOTES: (APPLIED TO SHEET 3)
1. 一般公差±0.15
TOLERANCES ON ALL DIMENSION ±0.15 UNLESS OTHERWISE SPECIFIED.
2. 基板厚寸法は、メッキ厚を含む。
P.C. BOARD THICKNESS APPLIES ACROSS TABS AND INCLUDES PLATING AND/OR METALIZATION.
3. パット部の仕上げ: ニッケル下地メッキ 0.002MIN. 厚の上、金メッキ 0.000756MIN. 厚を施す。
FINISH OF PAD: GOLD PLATING 0.00076MIN. OVER NI PLATING 0.002MIN.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框


ORDER INFORMATION

SDM6-W92V15R-72A3-LF



SERIES LEADFREE
72+132 WAY

90°SMT 1.5V
HIGH:9.2mm

DESCRIPTION: DDR S.O DIMM SOCKET H=9.2 TYPE A SMALL LATCH
FOR 204PIN DDR S.O DIMM(DDR3)

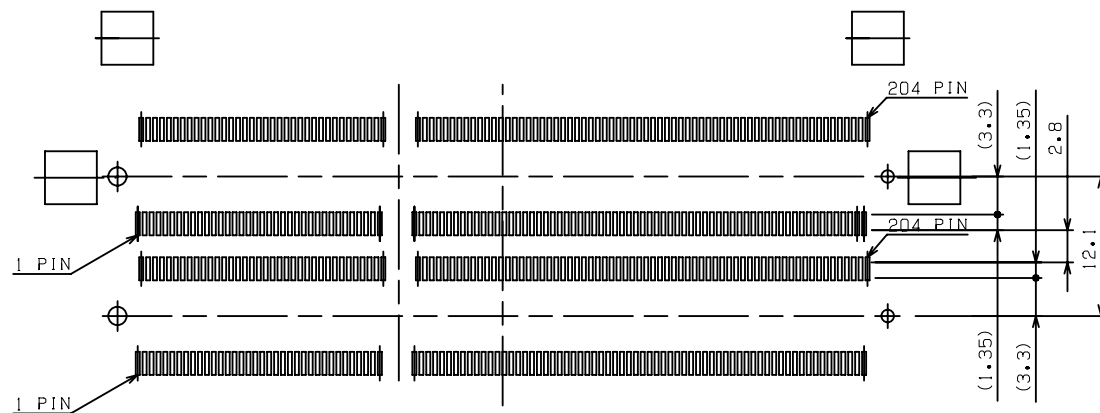

推奨基板レイアウト寸法
RECOMMENDED MOUNTING
P.C. BOARD PATTERN LAYOUT DIM.

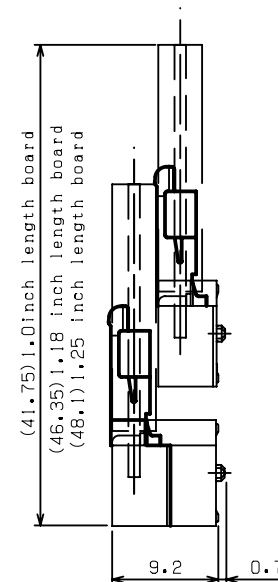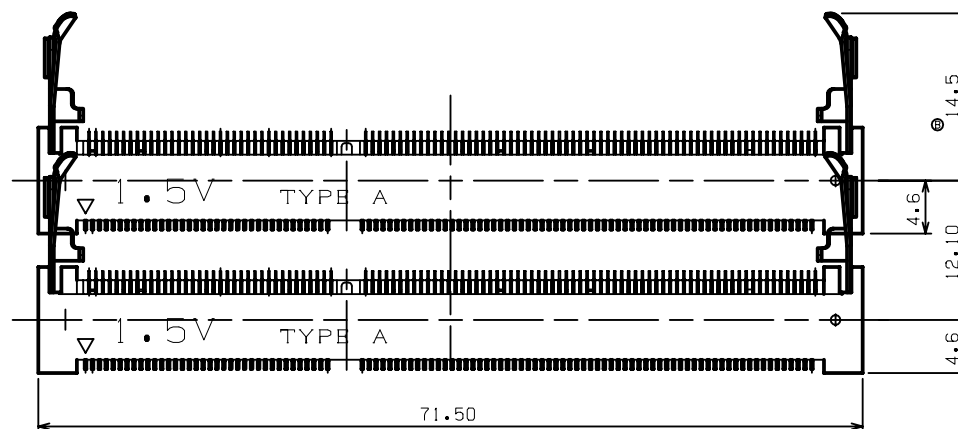

Combination Dimension for H=5.2 connector

(Only the combination of the (H=5.2) and (H=9.2) is possible.)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SDM6-W92V15R-72A3-LF

SERIES

LEADFREE

72+132 WAY

90°SMT

REEL

1.5V
HIGH:9.2mm

DESCRIPTION: DDR S.O DIMM SOCKET H=9.2 TYPE A SMALL LATCH
FOR 204PIN DDR S.O DIMM(DDR3)

