


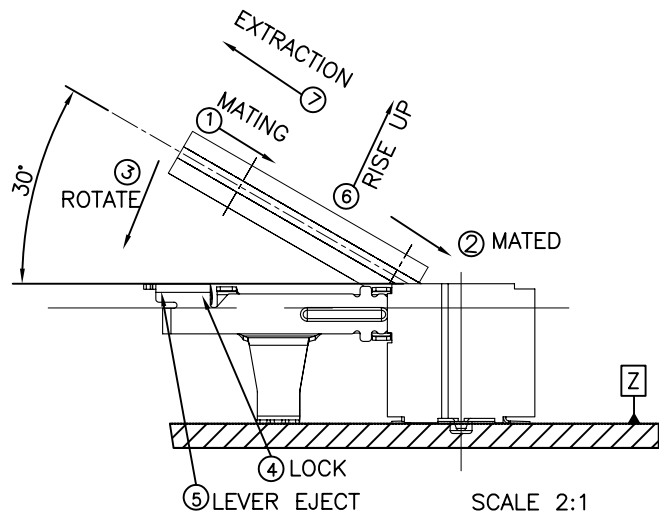


HOW TO MATE AND UNMATE

MATE: ① ——— ④


UNMATE: ⑤ ——— ⑦

30° MAX. MODULE INSERTION ANGLE TO ENGAGE LATCH

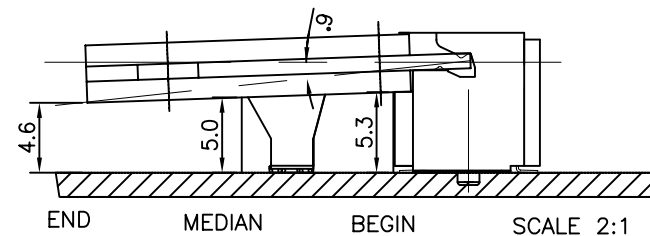

2° MAX. MODULE OVERLOAD ANGLE TO ENGAGE LATCH.
MAXIMUM RECOMMENDED COMPONENT HEIGHT ALLOWED ON MOTHERBOARD.

Max. Module Height=25.55mm		
END	MEDIAN	BEGIN
4.60	5.00	5.30

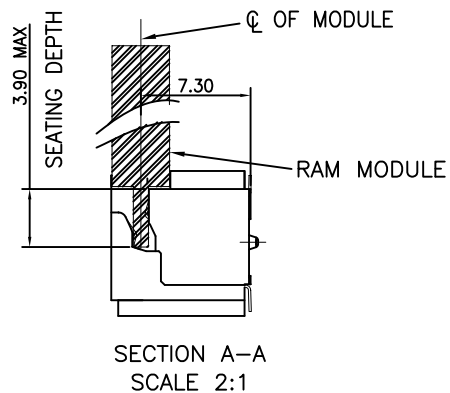

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

ORDER INFORMATION

SDM6-W92V18R-40A6-LF

SERIES

REEL




1.8V

HIGH: 9.2mm


90°SMT

LEADFREE
40+160 WAY


DESCRIPTION:

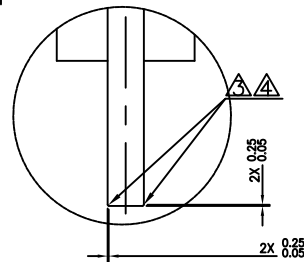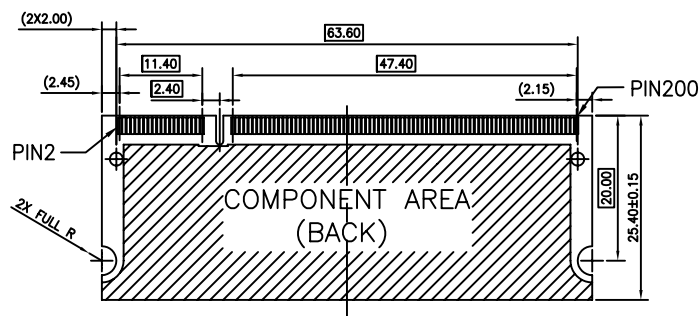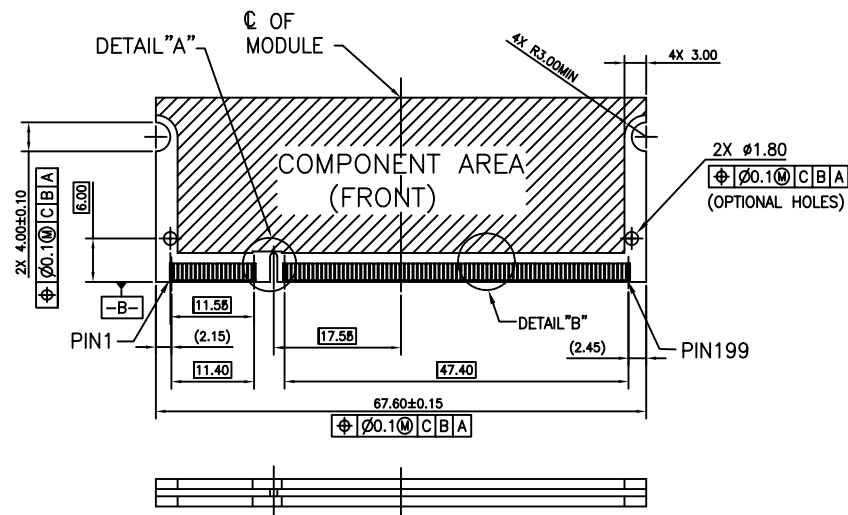

DETAIL "C"
SCALE 5:1



DETAIL B
SCALE 5:1

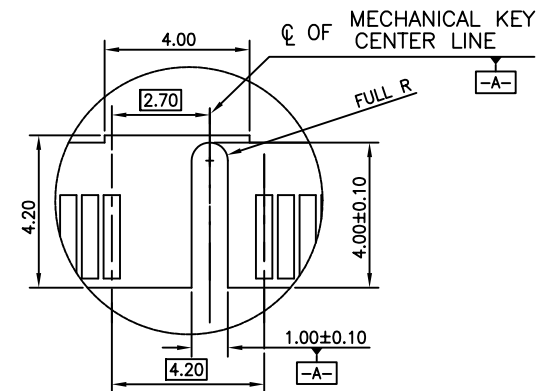

DETAIL A
SCALE 5:1

RECOMMENDED MATING P.C.B CONFIGURATION
RECOMMENDED P.C.B THICKNESS: 1.00±0.05MM
DEFAULT TOLERANCE ±0.05MM

NOTES:

- 1.PCB THICKNESS APPLIES ACROSS TABS AND INCLUDES PLATING AND/OR METALIZATION;
 - 2.FINISH OF PAD: Au PLATING 0.76um min, OVER Ni PLATING 2um min;
- △NO BURR;
△CHAMFER 0.25mm MAX. X 45° IF EXIST.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SDM6-W92V18R-40A6-LF

SERIES

REEL

1.8V


HIGH: 9.2mm

90°SMT



LEADFREE

40+160 WAY



DESCRIPTION:

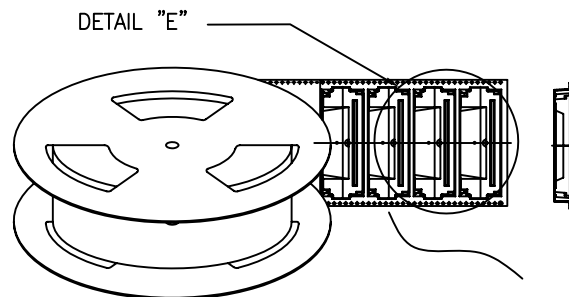

THE HEAD AND TAIL EMPTY 10PCS MIN

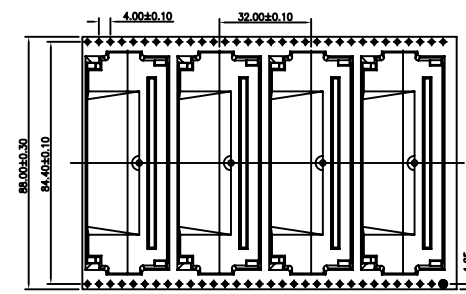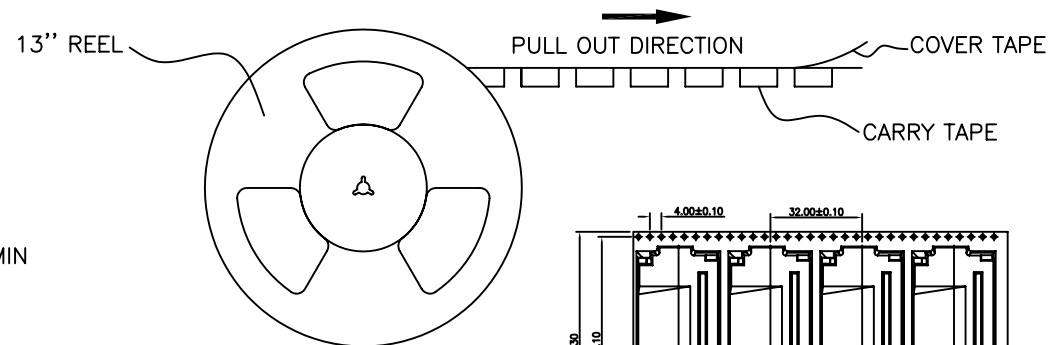

DETAIL "E"

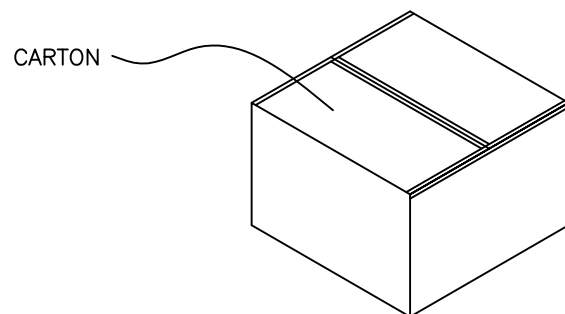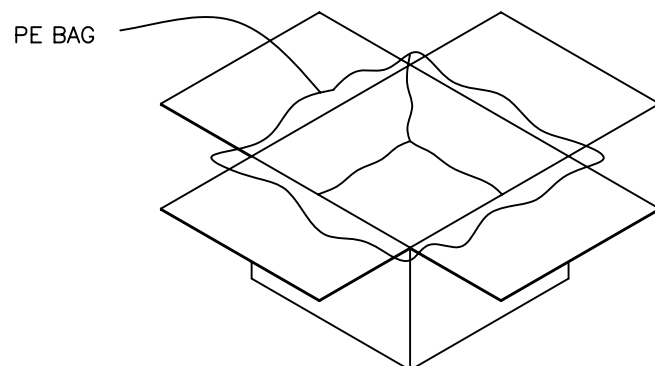

NOTES:

- 1.THE OPERATION OF PACKING REFER THE LEFT PROCESS.
- 2.PACKING LIST.

DESCRIPTION	P/N	SPECIFICATION	QT'Y
SODDR ASS'Y	SEE TABLE	9.2H TAPE&REEL PACKING	300PCS
REEL	G09-4-30008-K01	13"; W=88; PS_BLUE	3PCS
CARRIER TAPE	G09-6-00045-K01	4.5*88 ESD PS_BLACK	16.8M
COVER TAPE	G09-5-00018-K01	HOT JOINT W=82.4	16.8M
PE BAG	G09-6-50002-K01	L520*W320*H460	1PCS
DESICCANT	G09-7-00001-K01	2g/bag	4bag
CARTON	G09-1-30010-K01	L335*W335*H300; B=C	1PCS
INSIDER CARTON			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SDM6-W92V18R-40A6-LF

SERIES REEL LEADFREE
40+160 WAY
1.8V
HIGH: 9.2mm
90°SMT

DESCRIPTION: