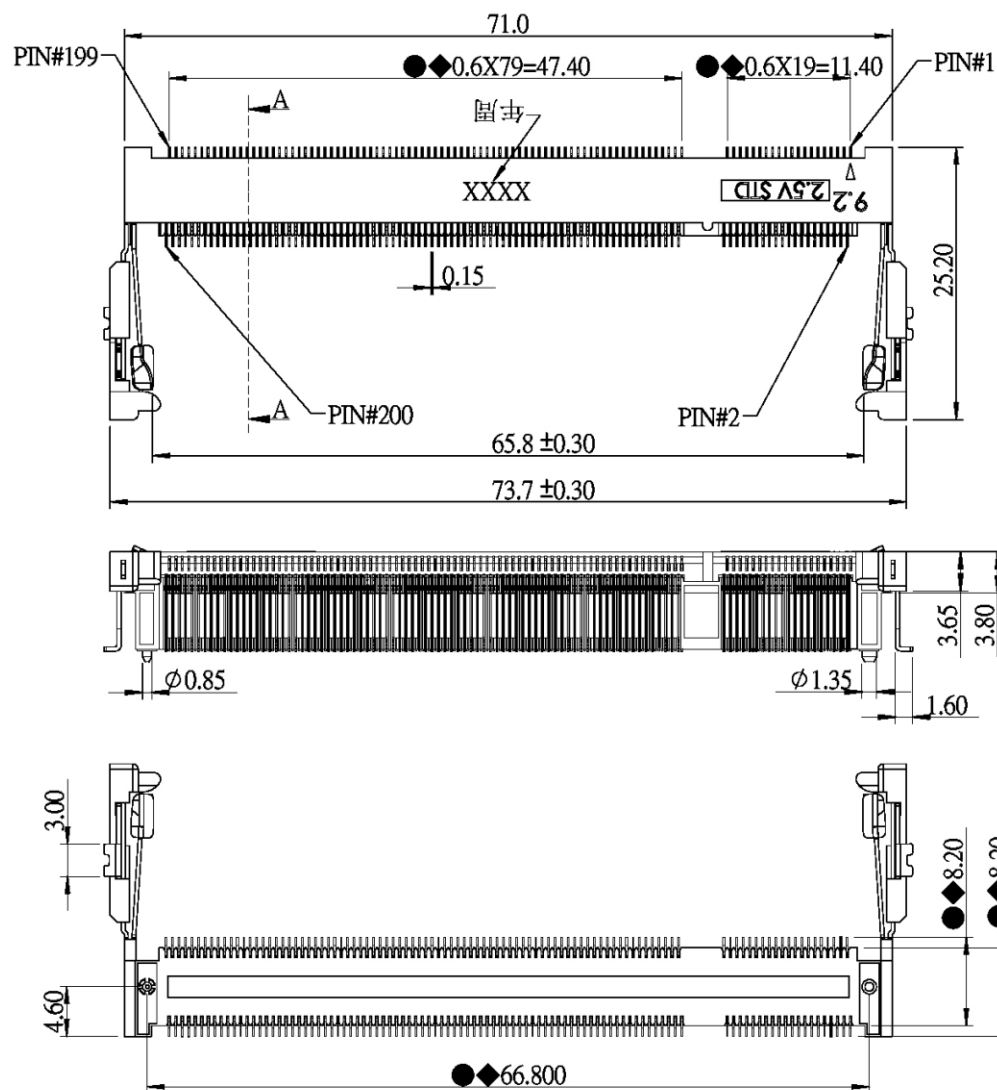



A-A (2 : 1)

NOTE:

1. SOLDER TAIL TO BE WITHIN 0.05 UPWARD AND 0.2 DOWNWARD FROM Z-DATUM PLACE, AND COPLANALITY OF SOLDER TAILS TO BE WITHIN 0.10. MEASUREMENT POINT IS SOLDER TAIL TIP.

2. INSPECTION SYMBOL:

● : MANUFACTURER INSPECTION
◆ : Q.C INSPECTION

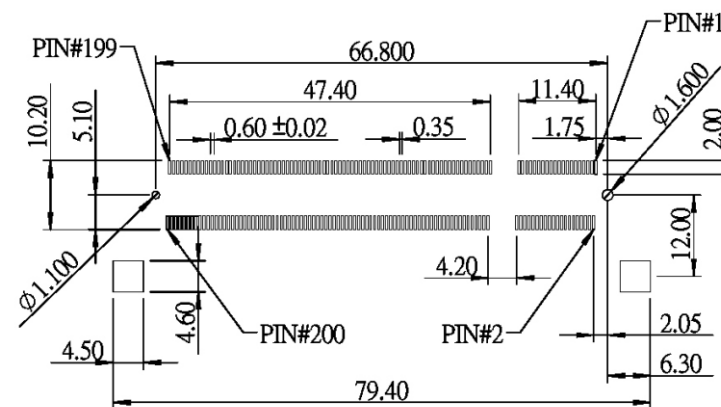

PCB LAYOUT : COMPONENT SIDE

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION






X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框


ORDER INFORMATION

SDM6-W92V25R-40A6-LF
SERIES | | | | LEADFREE
| | | | 40+160 WAY
| | | | REEL
| | | | 2.5V
| | | | HIGH:9.2mm
| | | | 90°SMT

DESCRIPTION:

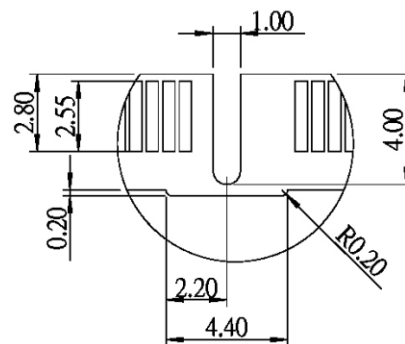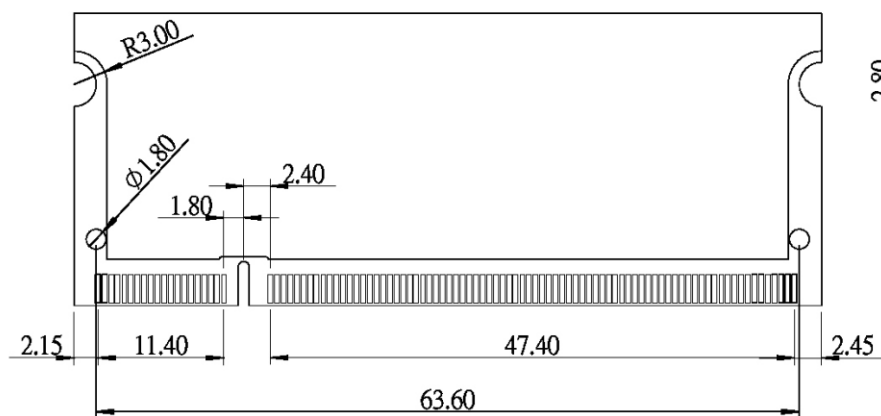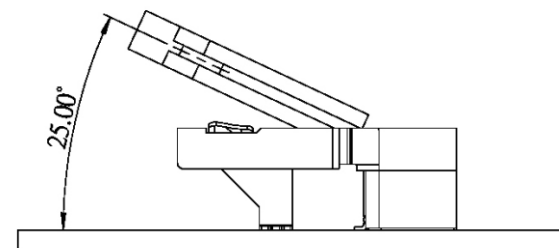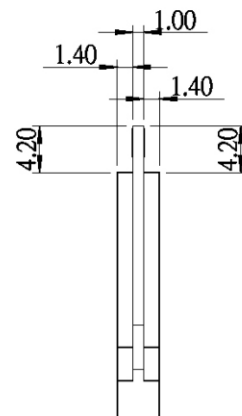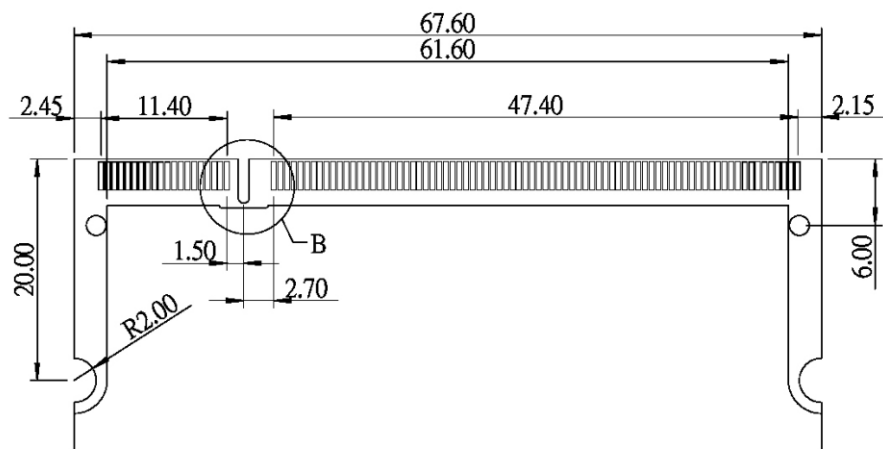

B (4 : 1)

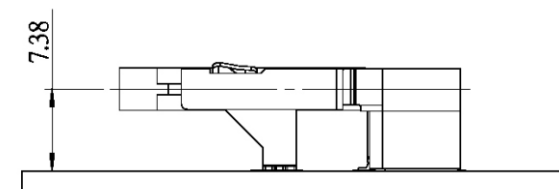

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SDM6-W92V25R-40A6-LF

SERIES

REEL


2.5V
HIGH:9.2mm

90°SMT

40+160 WAY

LEADFREE

DESCRIPTION:

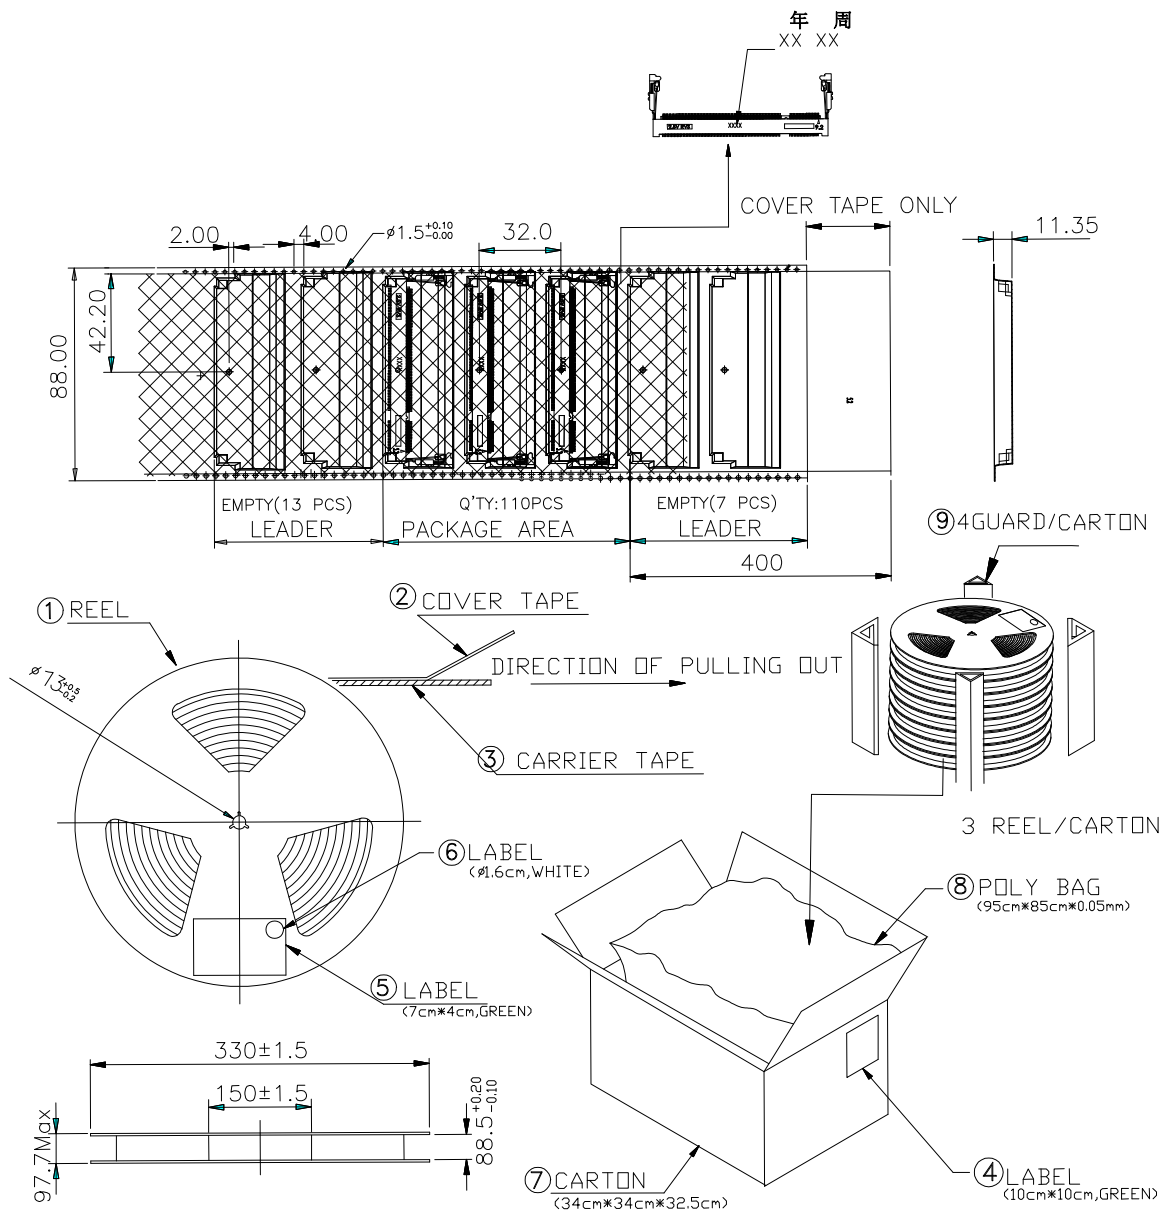

	MATERIAL	P/N	REMARKS
1	REEL	REEL-RA389	H=97.7Max
2	COVER	REEL-UA825	W=82.5mm
3	CARRIER TAPE	REEL-070LAB8914	W=88mm
4	LABEL(for RoHS)	CTP-00002	1 LABEL/CARTON
5	LABEL(for RoHS)	CTB-00004	1 LABEL/REEL
6	LABEL(for RoHS)	CTB-00005	1 LABEL/REEL
7	CARTON	CTN-C100Y	CARTON/3 REEL/330pcs
8	POLY BAG	95cmX85cmX0.05m/m	1 BAG/CARTON
9	GUARD	CTN-N3025	4 GUARD/CARTON

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SDM6-W92V25R-40A6-LF

SERIES

LEADFREE

40+160 WAY

REEL

2.5V

HIGH:9.2mm

90°SMT

DESCRIPTION: