

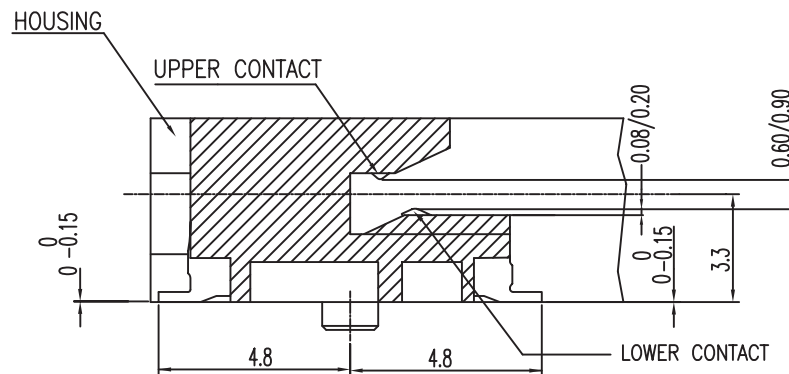
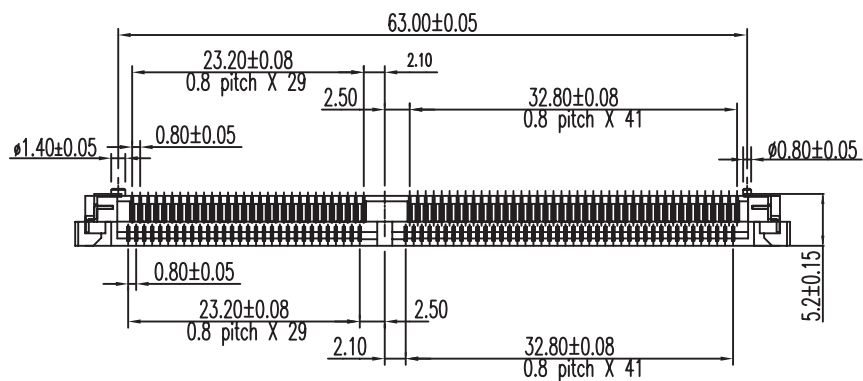
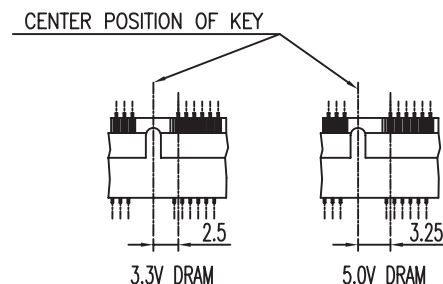




SECT "A"-"A" (S=4/1)

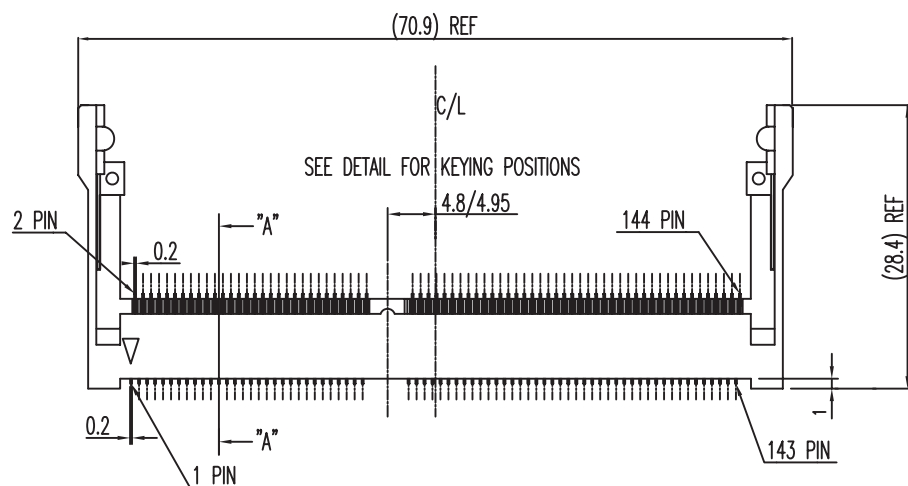

DETAIL FOR KEY POSITIONS

NOTES:

- 1, GENERAL TOLERANCE IS ± 0.1 , $\pm 0.30'$.
- 2, NO DAMAGE AFTER ASSEMBLE.
- 3, MATERIAL: HOUSING=LCP / UL94V-0
COLOR: NATURAL=3.3V DRAM, BLACK=X.XV DRAM.

CONTACT=PHOS-BRONZE($t=0.2$)

SOLDER TAB=PHOS-BRONZE($t=0.3$)

- 4,FINISH: CONTACT GOLD PLATING ON CONTACT AREA
(PLEASE REFER TO PART NUMBER)
(100u" TIN OR GOLD FLASH)LEAD ON SOLDER AREA
40u" NICKLE UNDERPLATED FOR ENTIRE CONTACT

SOLDER TAB=120u" TIN LEAD 90/10
40u" NICKEL UNDERPLATED FOR ENTIRE TAB.

- 5,PACKAGING SPEC. PK-500-00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.10
.XX $\pm$ 0.08
.XXX $\pm$ 0.01
ANG $\pm$

照片框

ORDER INFORMATION

SDM8-W52Vxx-6084-LF

SERIES

LEADFREE

60+84WAY





33:3.3V

50:5.0V

HIGH 5.2mm

90°SMT

DESCRIPTION: S.O.DIMM SOCKET 144 POS (5.2) ASSY CUSTOMER DRAWING

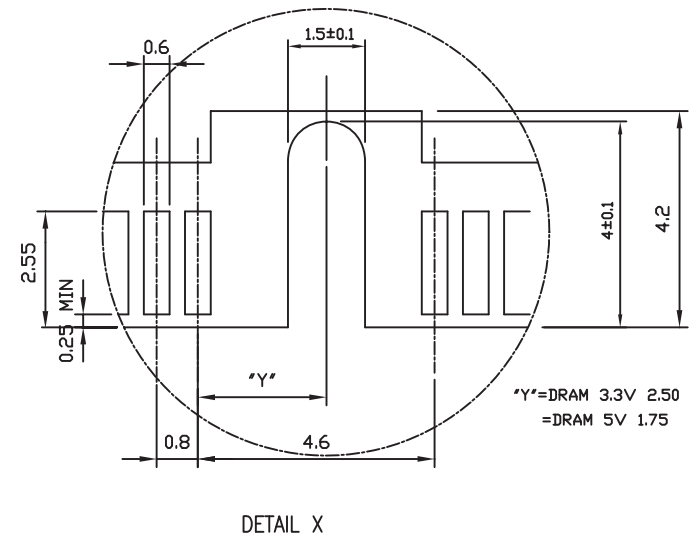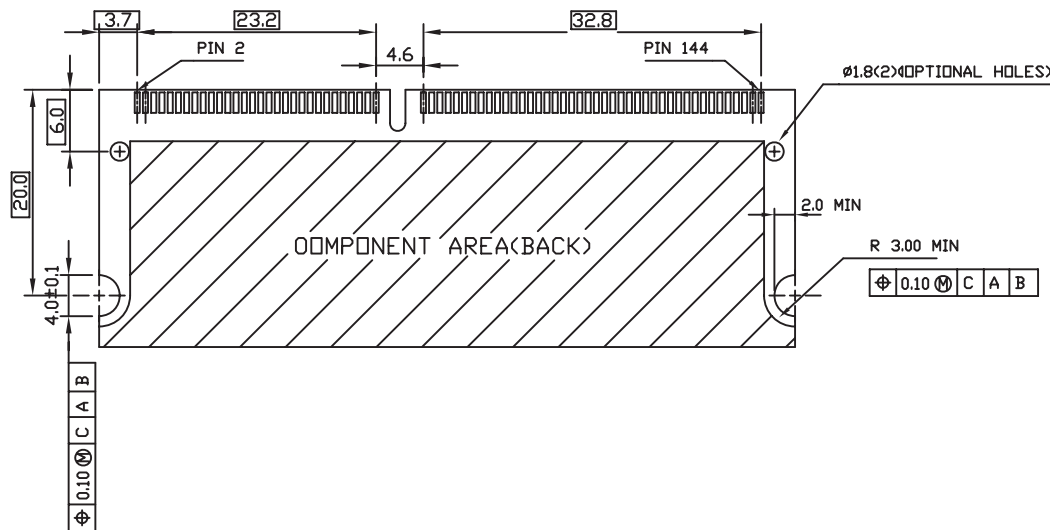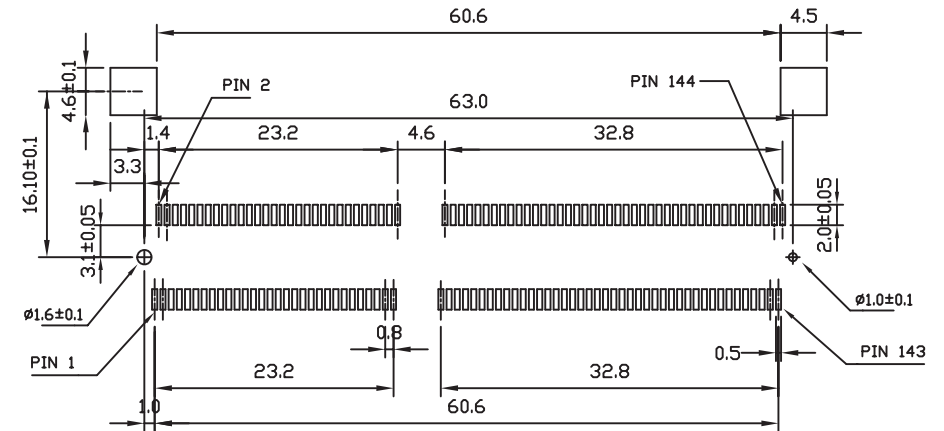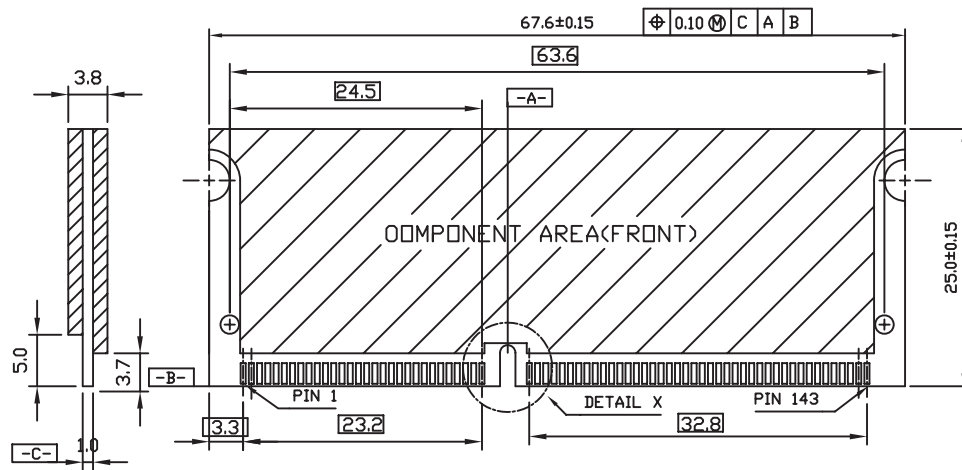

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.10
.XX ± 0.08
.XXX ± 0.01
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SDM8-W52Vxx-6084-LF

SERIES

LEADFREE

60+84WAY

33:3.3V

50:5.0V

HIGH 5.2mm

90°SMT

DESCRIPTION: RECOMMENDED PCB LAYOUT FOR S.O.DIMM MODULE AND PATTERN