

TYPE 2
POWER SUPPLY 1.8 V

DETAIL E
MECHANICAL KEY TYPE

1.8V	TYPE 2
2.5V	TYPE 1
POWER SUPPLY	KEY TYPE

1. 材質: ハウジング: LCP樹脂、UL94V-0、色: 黒色
 コンタクト: 銅合金
 メタルラッチ: ステンレス
 MATERIAL: HOUSING: LCP, UL94V-0, COLOR: BLACK
 CONTACT: COPPER ALLOY
 METAL LATCH: SUS

 メッキ: コンタクト (接点部、半田付け部) : 金メッキ0.0075μmMIN, ニッケル下地1.5μmMIN.
 PLATING: CONTACT (CONTACT POINT, SOLDER AREA):
 Au PLATE 0.0075μm MIN, Ni UNDER PLATE 1.5μm MIN.

 コネクタを平面上に置き、端子半田付け部の浮きは、0.1mm以下
 MUST BE MEASURED FLOATING AMOUNT OF CONTACT TAILS
 FROM DATUM SURFACE IS 0.1mm MAX.




- ④ 倍率適用外寸法
 NOT TO SCALE.
 ⑤ 公差非累積
 TOLERANCES NON-CUMULATIVE
 ⑥ 他社のソケット用
 FOR SOCKET OF THE OTHER COMPANIES



照片框

SERIES
90°SMT
HIGH 5.2mm
REEL
V18:1.8V
V25:2.5V
38+106 WAY

DESCRIPTION:

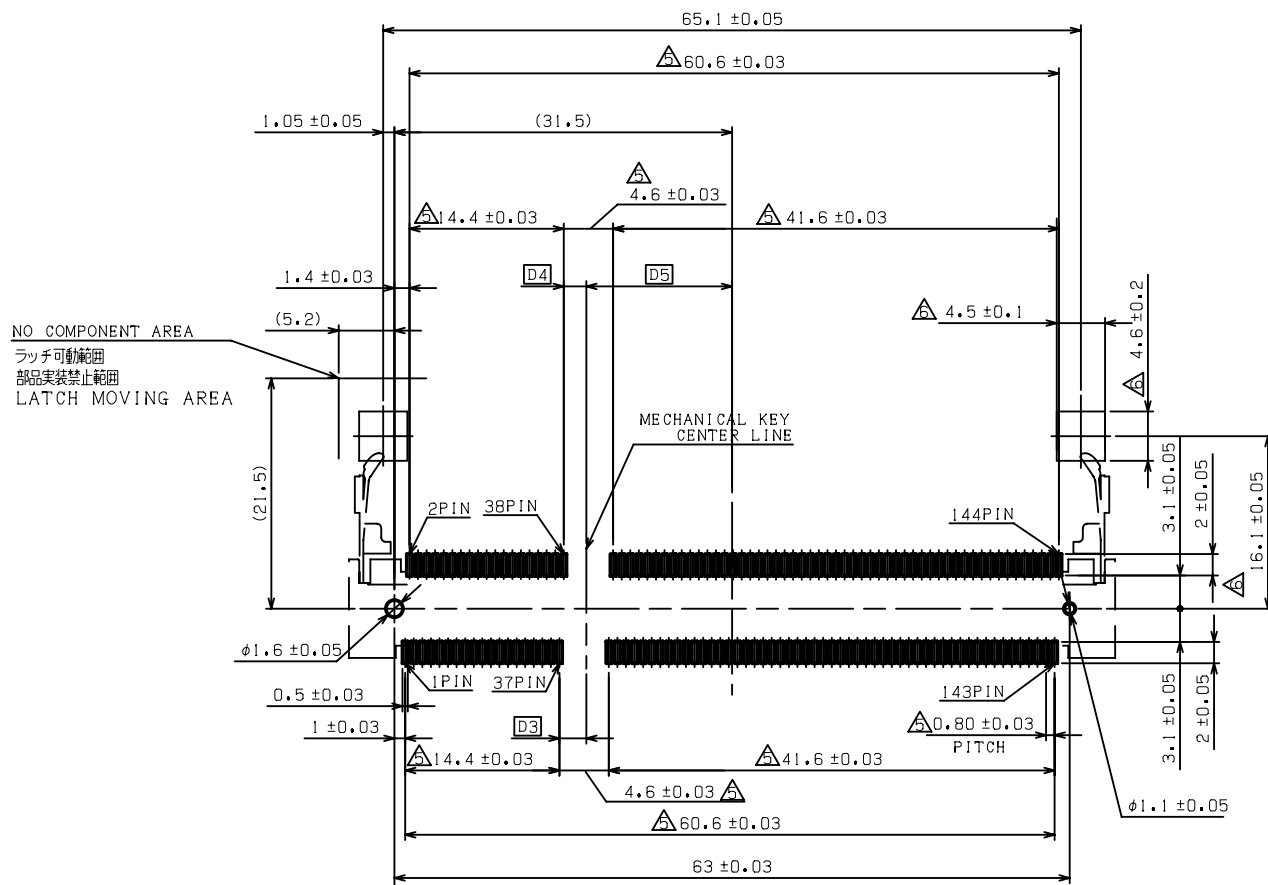

推奨基板レイアウト寸法
RECOMMENDED MOUNTING
P.C. BOARD PATTERN LAYOUT DIM.

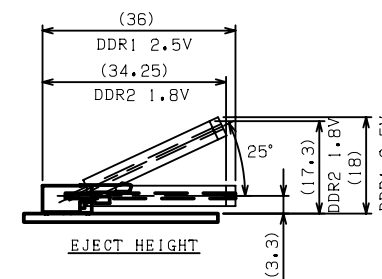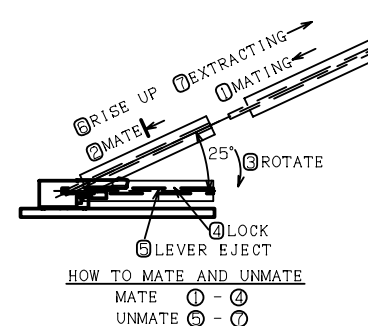

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SDM8-W52VxxR-038106-LF

SERIES

90°SMT

REEL



V18:1.8V

V25:2.5V

HIGH 5.2mm

38+106 WAY

DESCRIPTION:

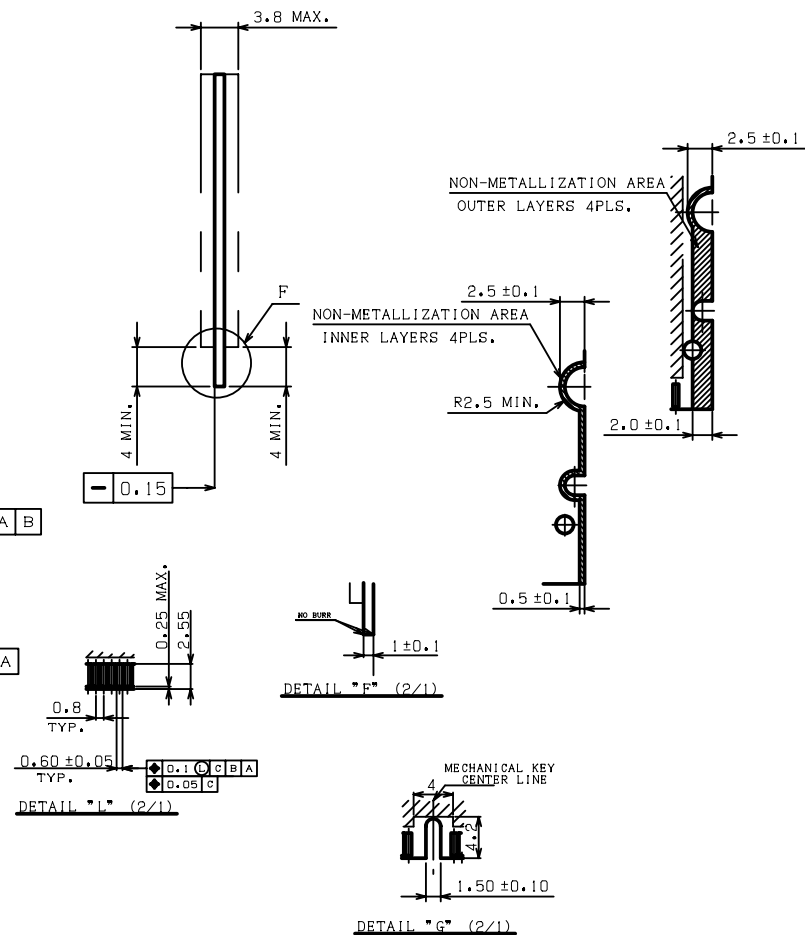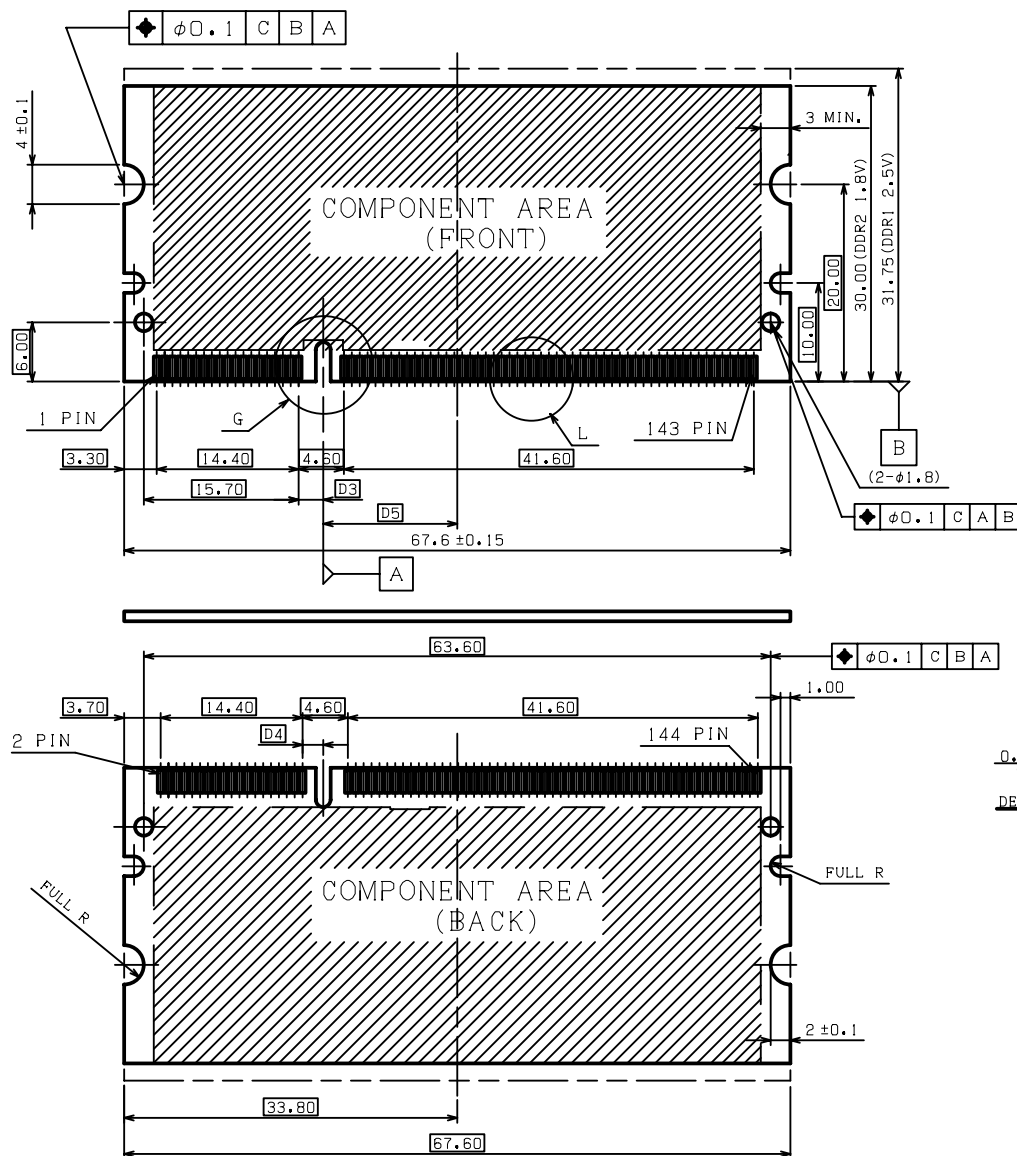

1.8V	13.60	2.10	2.50
2.5V	14.35	1.35	1.75
POWER SUPPLY	D5	D4	D3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SDM8-W52VxxR-038106-LF

SERIES

90°SMT

REEL

V18:1.8V



V25:2.5V

HIGH 5.2mm

38+106 WAY

DESCRIPTION:

DIRECTION OFF TOP OF REEL

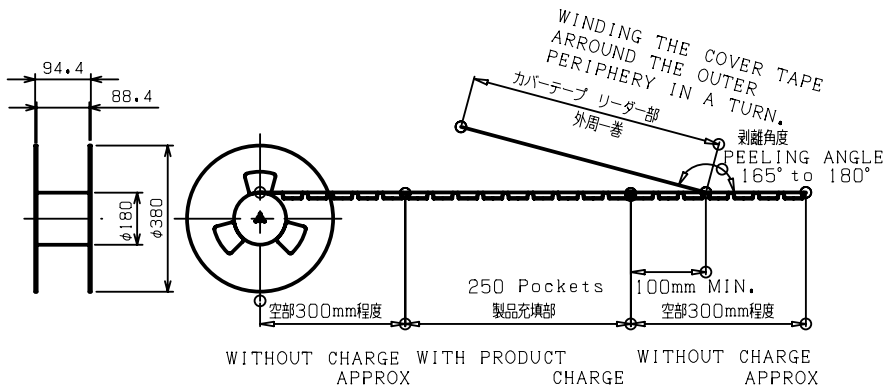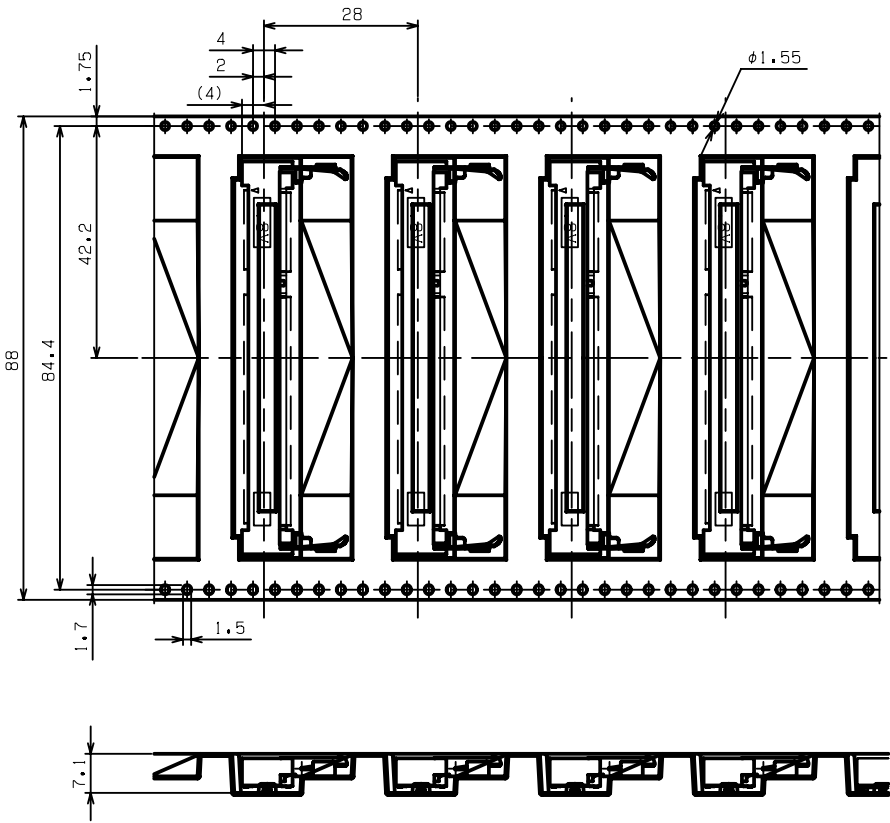

250	1.8V
250	2.5V
QTY.	POWER SUPPLY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. $\pm$

CHECKED BY GENIUS

.X $\pm$

UNIT / mm

SCALE 1 : 1

.XX $\pm$

DATE

.XXX $\pm$

ANG $\pm$

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

SDM8-W52VxxR-038106-LF

SERIES

90°SMT

38+106 WAY

REEL

V18:1.8V

V25:2.5V

HIGH 5.2mm

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com