

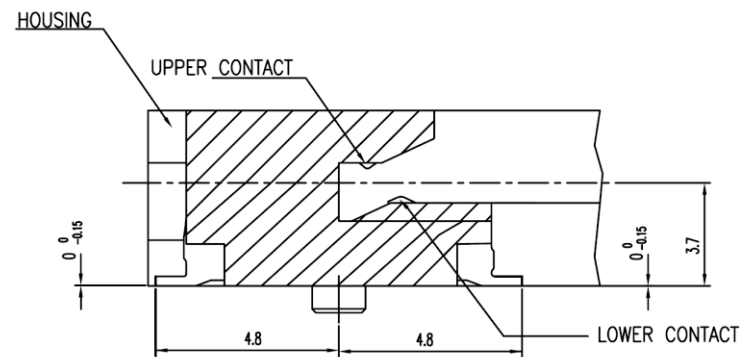
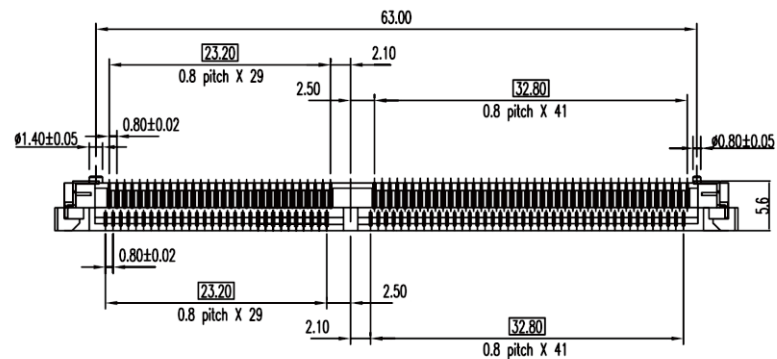
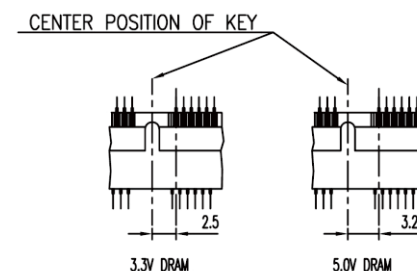




SECT "A"- "A" (S=4/1)

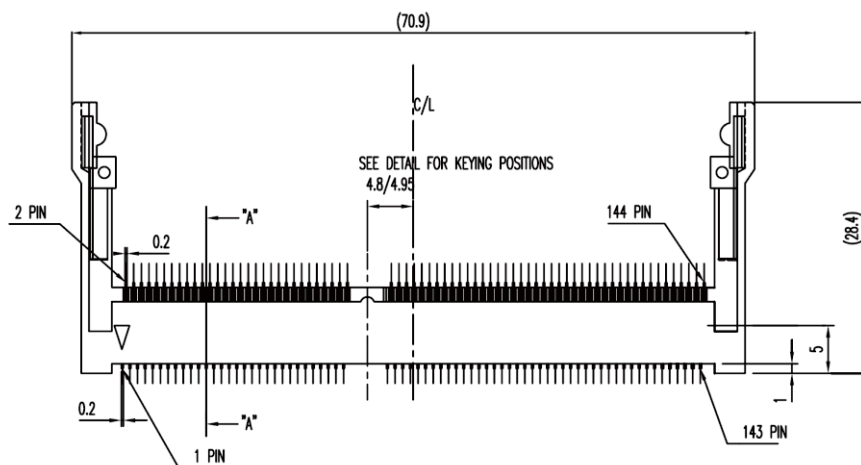

DETAIL FOR KEY POSITIONS

NOTES:

- 1, GENERAL TOLERANCE IS ± 0.1 , $\pm 0^\circ 30'$.
- 2, NO DAMAGE AFTER ASSEMBLE.
- 3, MATERIAL: HOUSING=LCP / UL94V-0
COLOR: NATURAL=3.3V DRAM, BLACK=X.XV DRAM.
CONTACT=PHOS-BRONZE($t=0.2$)
SOLDER TAB=PHOS-BRONZE($t=0.3$)

- 4, FINISH: CONTACT GOLD PLATING ON CONTACT AREA
(PLEASE REFER TO PART NUMBER)
100u" TIN OR GOLD FLASH ON SOLDER AREA
40u" NICKLE UNDERPLATED FOR ENTIRE CONTACT
SOLDER TAB=100u" TIN LEAD FREE
40u" NICKEL UNDERPLATED FOR ENTIRE TAB.
- 5, PACKAGING SPEC. PK-500-00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

SDM8-W56V33-6084-LF

SERIES

3.3V





60+84WAY

LEADFREE

HIGH 5.6mm

90°SMT

DESCRIPTION:

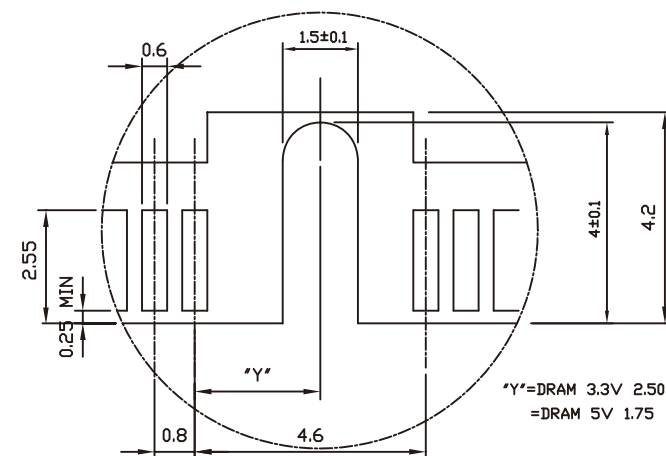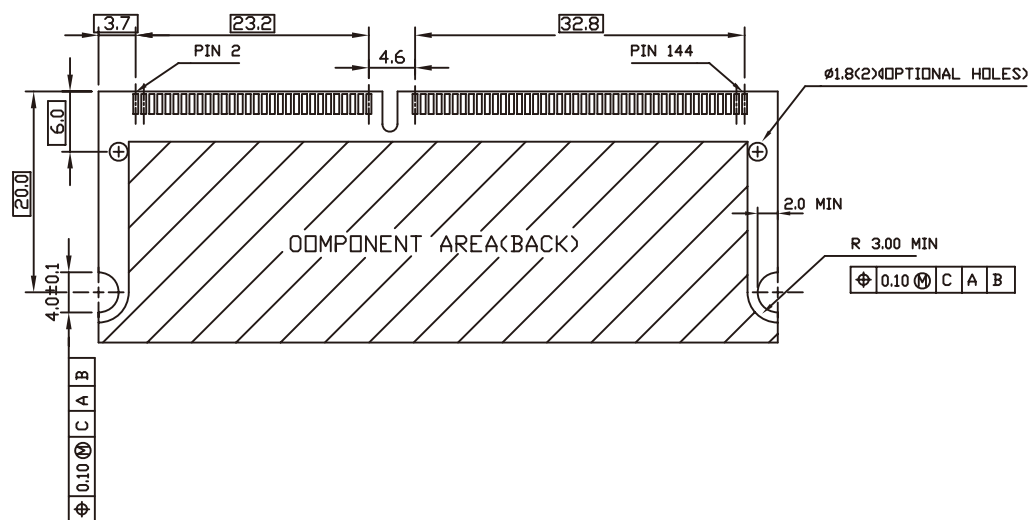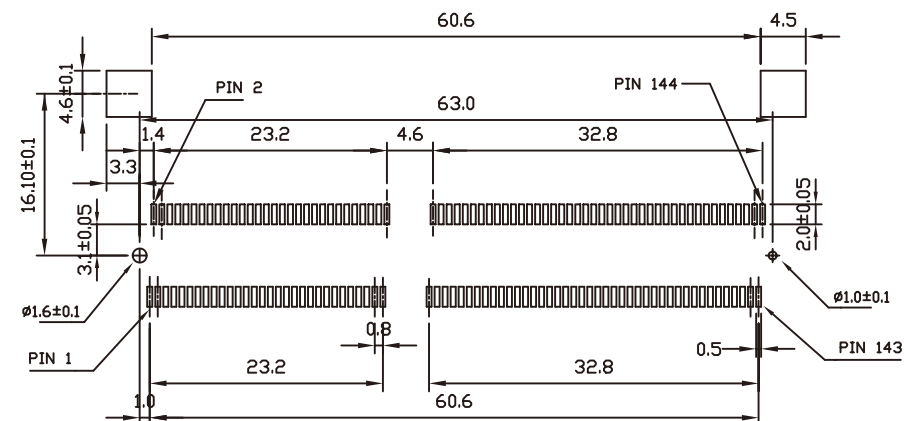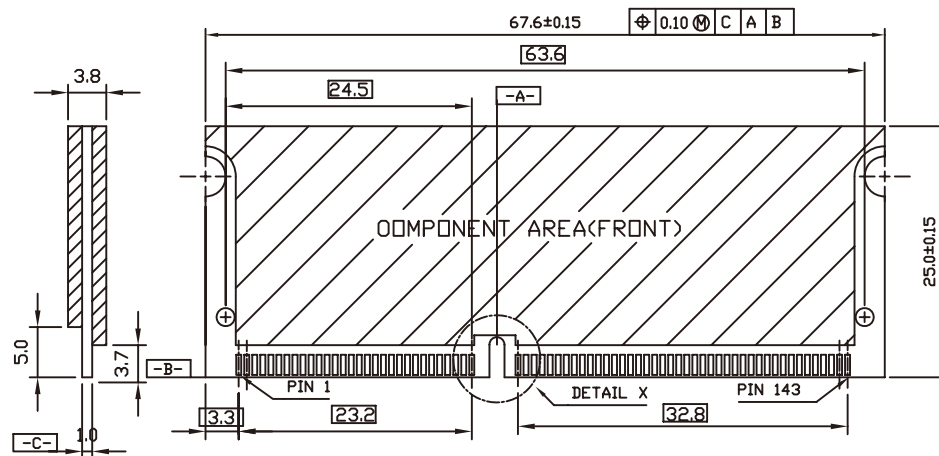

DETAIL X

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X.±

.X±

.XX±

.XXX±

ANG±

PPOJECTION

照片框

ORDER INFORMATION

SDM8-W56V33-6084-LF

SERIES

LEADFREE

60+84WAY

3.3V
HIGH 5.6mm

90°SMT

DESCRIPTION: RECOMMENDED PCB LAYOUT FOR S.O.DIMM MODULE AND PATTERN