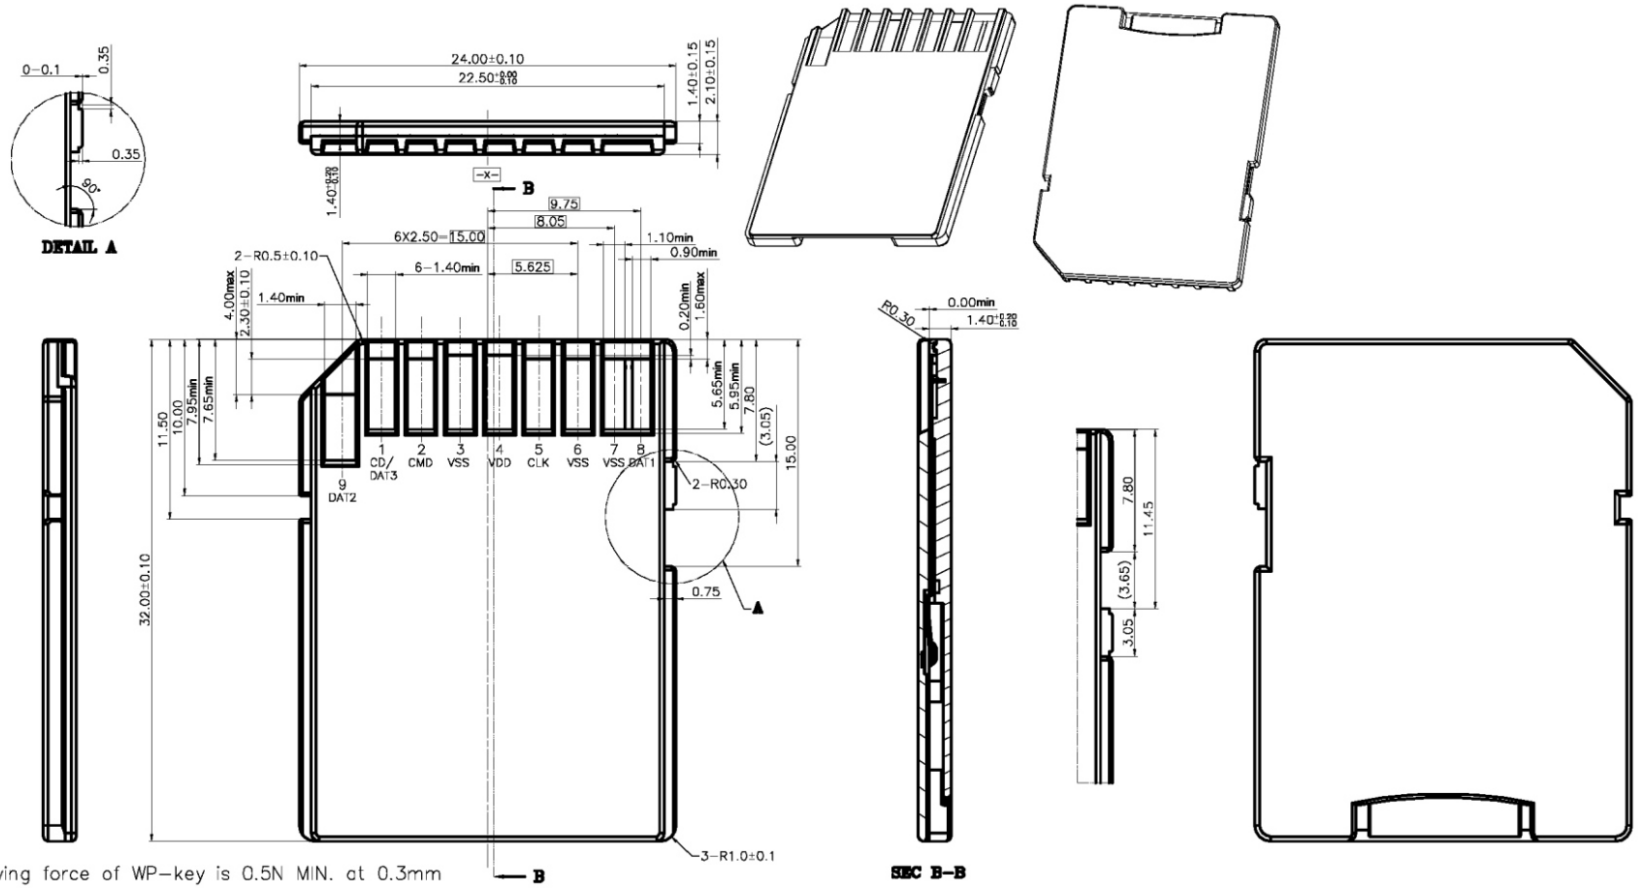

NOTE:

1. The moving force of WP-key is 0.5N MIN. at 0.3mm Sapce from the edge of Adapter case.
2. The WP switch cycle: 10000 cycles MIN.
3. No bur and no square edge. Recommended to have R0.05mm MIN. or C0.05mm MIN. or C0.05mm MIN. or suitable similar form. moving force of WP-key.
4. Contact Resisitance: 100mΩ Max.
5. Dielectric Withstanding Voltage: 500VAC Max With 1 Minute
6. Insulation Resisitance: 1000 MΩ Min.
7. Current Rating: 1 A AC/DC Max. Rated Voltage: 500 V RMS Min.
8. Micro SD Card extraction force: 1.5N MIN.
9. Durability: 10,000 mating cycles.
10. Operating Temperature: -25℃ ~ +85℃
11. Storage Temperature: -45℃ ~ +85℃

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ±
DATE		.XX ±
		.XXX ±
		ANG ±
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

SDTF-ES-0908-LF

SERIES | MALE TO FEMALE | 09 TO 08 WAY | LEADFREE

DESCRIPTION: