

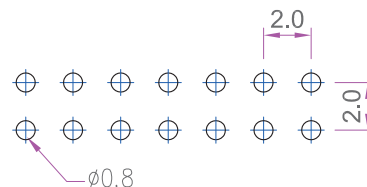


Recommended P.C. Board Hole Layout

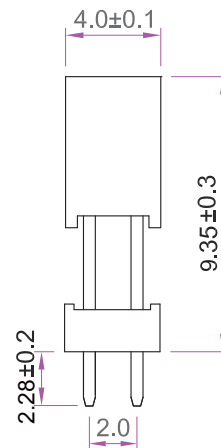

Specifications

Current Rating : 2 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 500V
 Operating Temperature : -40°C ~ +125°C
 Contact Material : Phosphor Bronze
 Insulator Material : Polyester, UL 94V-0 Nylon-9T
 Contact Plated : See Option
 Standard: Full Gold Flash

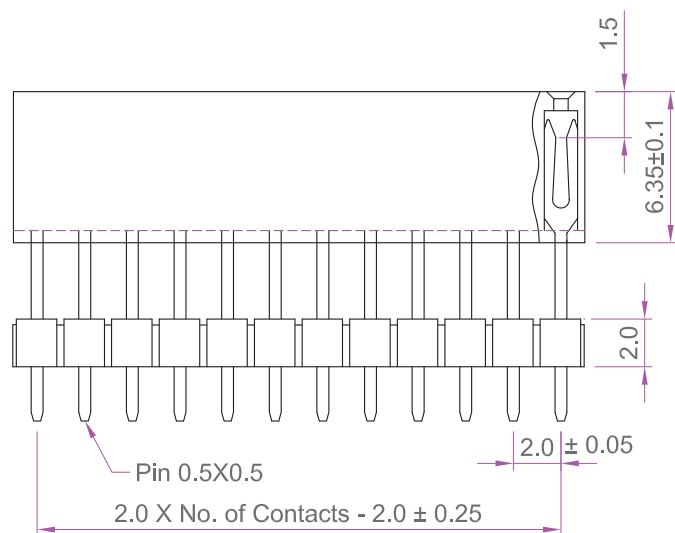

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$ 0.50
 .X $\pm$ 0.20
 .XX $\pm$ 0.10
 .XXX $\pm$
 ANG $\pm$

照片框

ORDER INFORMATION

SE-D094023-2Xxx-LF
 SERIES | HIGH 9.35mm
 DIP 180°
 LEADFREE
 2X03:06WAY
 2X30:60WAY
 DIP 2.28mm

DESCRIPTION: