




Recommended
P.C. Board Hole Layout

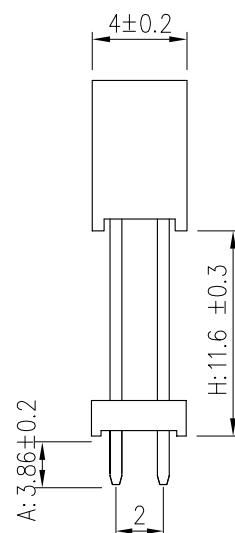

Specifications

Current Rating : 2 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 500V
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Phosphor Bronze
 Insulator Material : Polyester, UL 94V-0
 Standard : Nylon-6T
 Contact Plated : See Plating Option / Standard: Full Gold

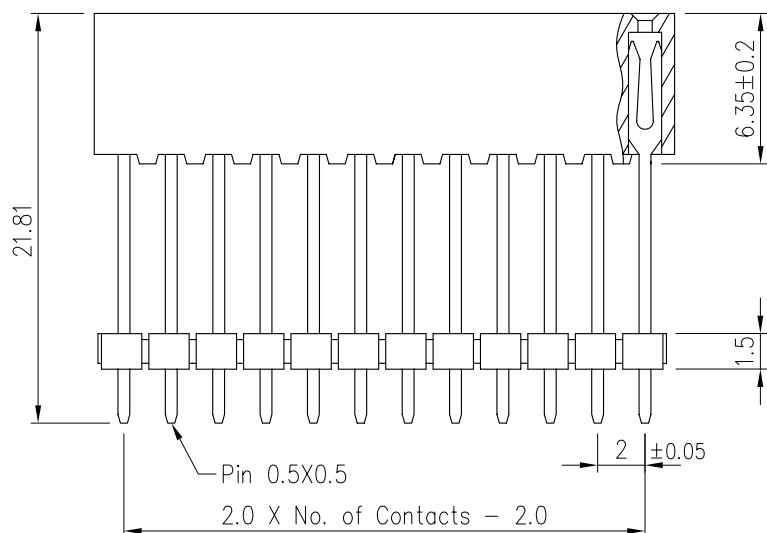

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION

ORDER INFORMATION

SE-D179038-2Xxx-LF
 SERIES
 LEADFREE
 2X02:04 WAY
 2X40:80 WAY
 DIP 3.8mm
 HIGH 17.9mm
 DIP 180°

DESCRIPTION: Female Header P2.0mm Profile: 6.35 Stacking , Dual Row, Straight Type