


Recommended
P.C. Board Hole Layout

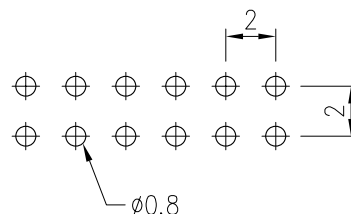

Specifications

Current Rating : 2 Amps

Insulator Resistance : 1000 Megohms min.

Contact Resistance : 20 m ohms max.

Dielectric Withstanding : AC 500V


Operating Temperature : -40°C ~ +105°C

Contact Material : Phosphor Bronze

Insulator Material : Polyester, UL 94V-0

Standard : Nylon-6T

Contact Plated : See Plating Option / Standard: Full Gold

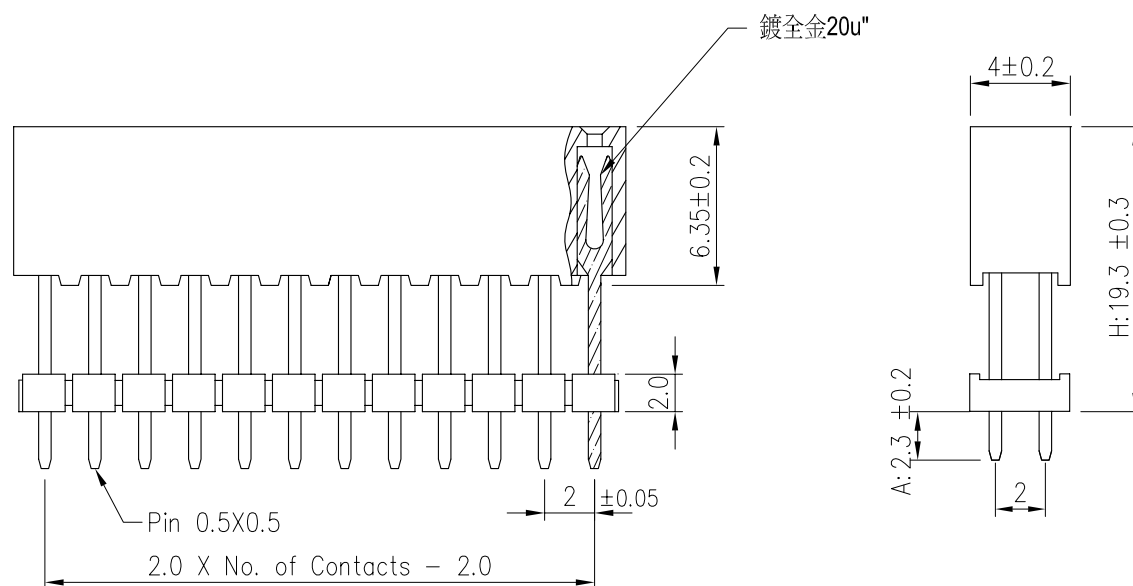

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

SE-D19323S20-2Xxx-LF
 SERIES | DIP 180° | DIP 2.3mm | HIGH 19.3mm
 LEADFREE
 2X03:06WAY
 2X40:80WAY
 SEMI GOLD 20u"

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

DESCRIPTION: Female Header P2.0mm Profile: 6.35 Stacking, Dual Row, Straight Type