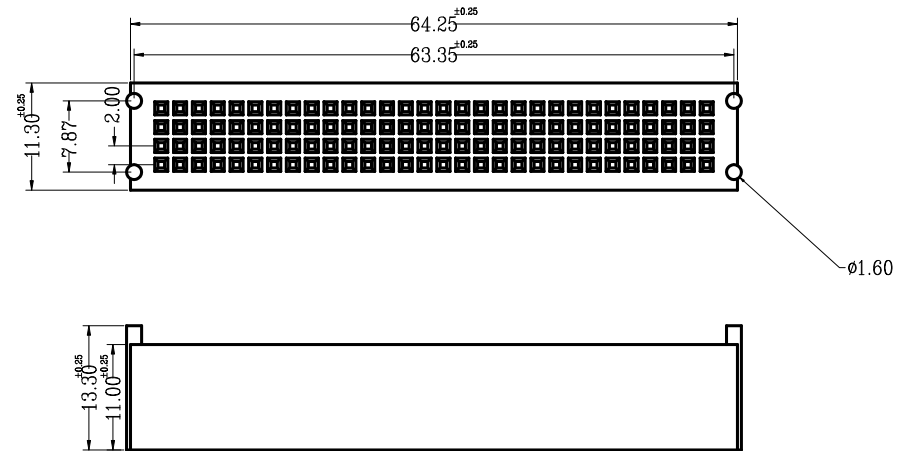
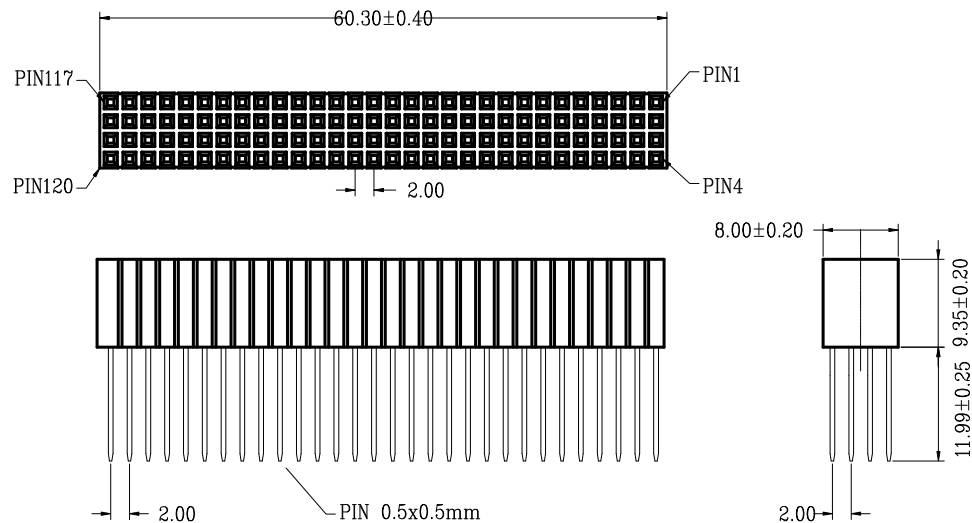


SPECIFICATIONS

CURRENT RATING: 2 AMP MAX.
 INSULATION RESISTANCE: 1000M OHMS MIN.
 DIELECTRIC WITHSTANDING: 1000V AC/DC
 CONTACT RESISTANCE: 30m OHMS MAX.
 OPERATING TEMPERATURE: -25°C ~ +85°C
 MATERIALS
 CONTACT MATERIAL: PHOSPHOR BRONZE
 INSULATION MATERIAL: NYLON 9T UL 94V-0
 Contact plating 3u"

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50
 .X ± 0.35
 .XX ± 0.25
 .XXX ± 0.05
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SE-D21-120-LF
 SERIES | LEADFREE
 120 WAY
 TOTAL HIGH 21.34mm
 DIP 180°

DESCRIPTION: PC-104 plus 120p type