

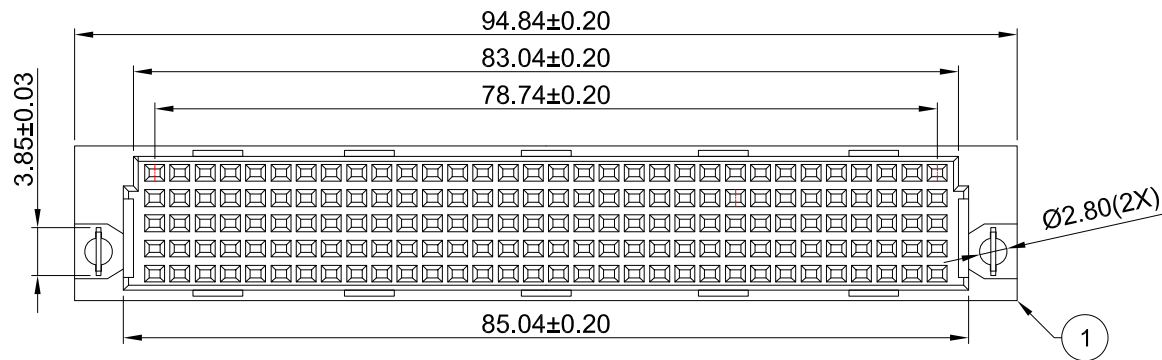
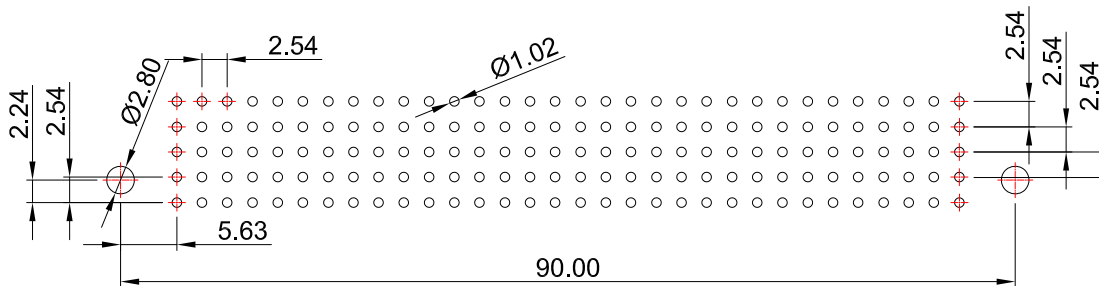


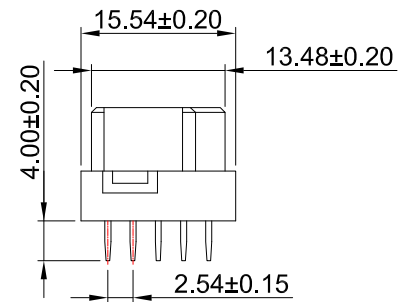

Notes:

1. Current Rating : 3.0A
2. Contact Resistance : 30mΩ Max.
3. Insulator Resistance : 3000MΩ Min / 100V DC
4. Withstanding Voltage : 1000V AC for 1 Minute.
5. Temperature Range : -55~+105°C

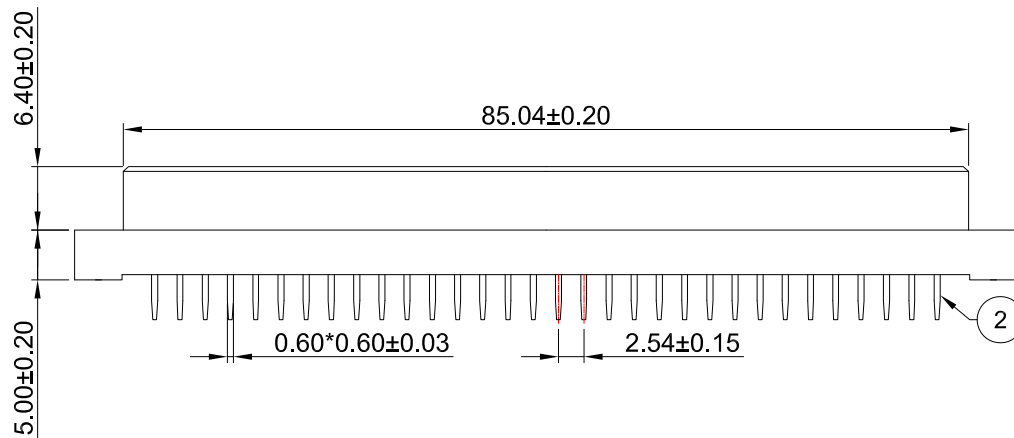

PCB LAYOUT

2	Contact	Brass	160
1	Housing	PBT UL 94V-0	1
o.	Part Name	Specifications	Qt'y

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SE-SD-5X32-LF
SERIES | LEADFREE
160 WAY
DIP 180°
FEMALE

DESCRIPTION: DIN41612 DIP Female Vertical Type

煜倫股份有限公司

www.morethanall.com