


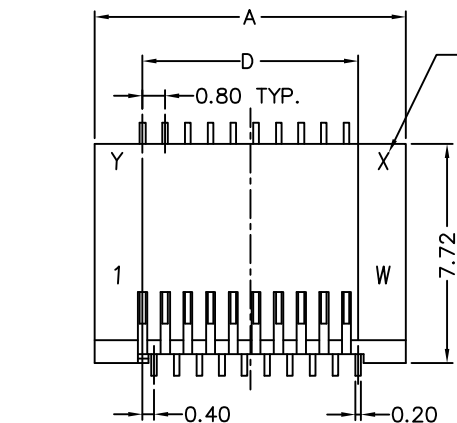



REF. TABLE 2

MATERIALS


HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
TERMINAL: PHOSPHOR BRANZE, GOLD PLATED 15u"

SPECIFICATION

CURRENT RATING: 1.0 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 40m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+85°C
DURABILITY: MATING AND UNMATING FORCE TESTER 5000 CYCLES(min)

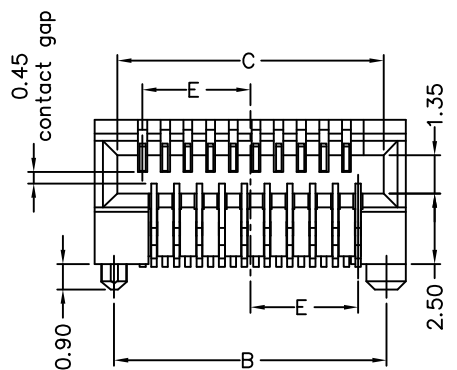


PART NUMBER

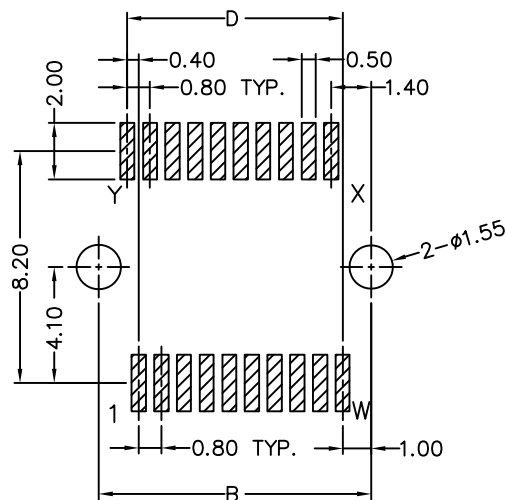

P.C.B LAYOUT
TOP VIEW ±0.05

TABLE 1					
NO. POS.	DIM. A	DIM. B	DIM. C	DIM. D	DIM. E
20	11.00	9.60	9.40	7.60	3.80
30	15.00	13.60	13.40	11.60	5.80
70	31.00	29.60	29.40	27.60	14.80

TABLE 2					
NO. POS.	W	X	Y		
20	10	11	20		
30	15	16	30		
70	35	36	70		

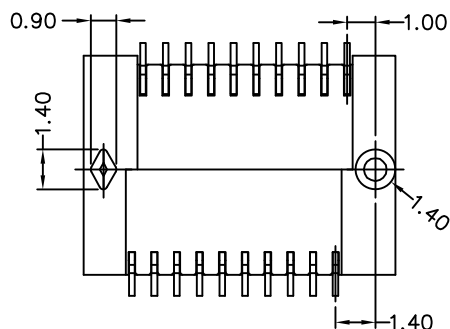

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION


照片框

ORDER INFORMATION

SFP-SWPR-xx-LF
SERIES
LEADFREE
20.30.70WAY
REEL
POST
90°SMT
FEMALE


DESCRIPTION: SFP CONN., PCB MOUNT, SMT, WITH POST

DIMENSION		
NO. OF CONTACTS	20	30
DIM "A"	12.00	16.00
DIM "B"	8.00	12.00

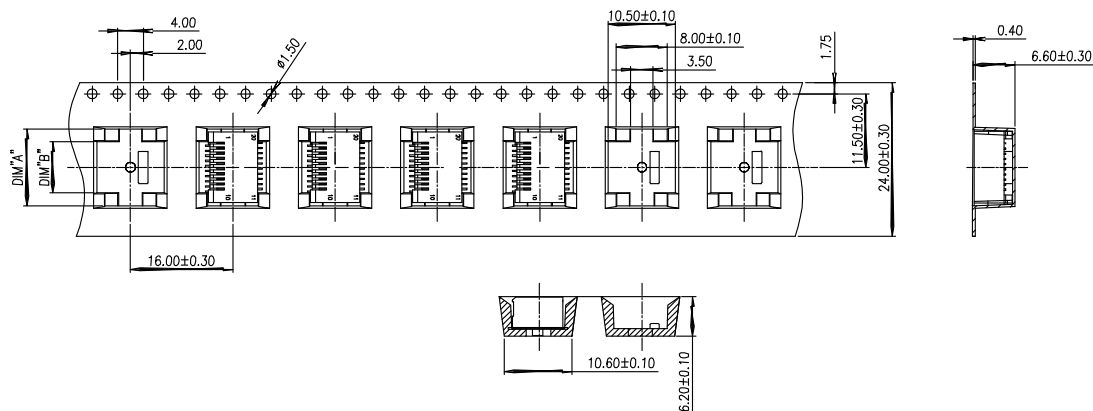

NOTE:

1. REEL MATERIAL: PS
2. CARRIER MATERIAL: PS
3. COVERTAPE MATERIAL:PS
4. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE±0.2mm.
5. A MEASURED ON A PLANE 0.3mm ABOVE THE BOTTOM OF THE POCKET.
6. MATERIAL: TRANSPARENT CONDUCTIVE POLYSTYRENE.
7. THICKNESS: 0.40±0.05mm.
8. PACKING LENGTH PER REEL: 24.60 METERS.
9. COMPONENT LOADER 13" REEL: 500 PCS

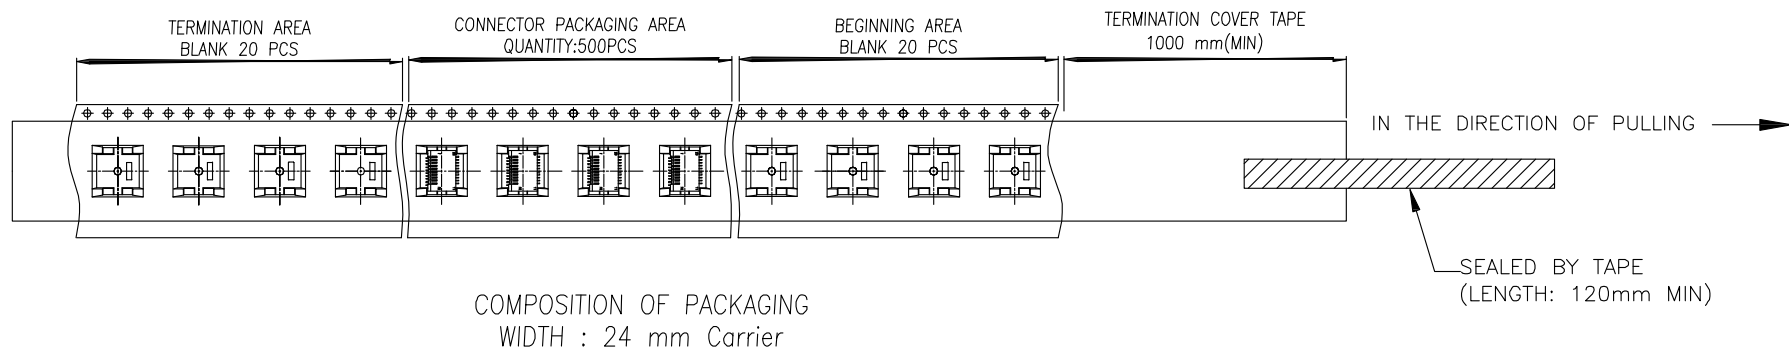

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±



照片框

ORDER INFORMATION

SFP-SWPR-xx-LF
SERIES
LEADFREE
20.30WAY
REEL
POST
90°SMT
FEMALE

DESCRIPTION: SFP CONN., PCB MOUNT, SMT, WITH POST PACKING

REEL

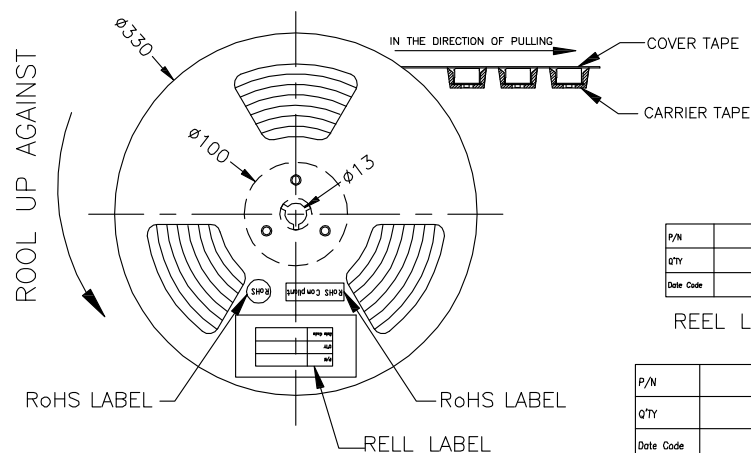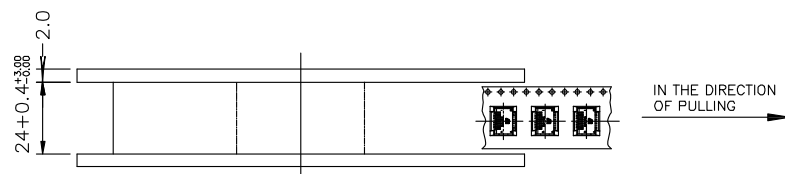


P/N	
Q'TY	
Date Code	

REEL LABEL


P/N	
Q'TY	
Date Code	

CARTON LABEL

INNER(BOX)

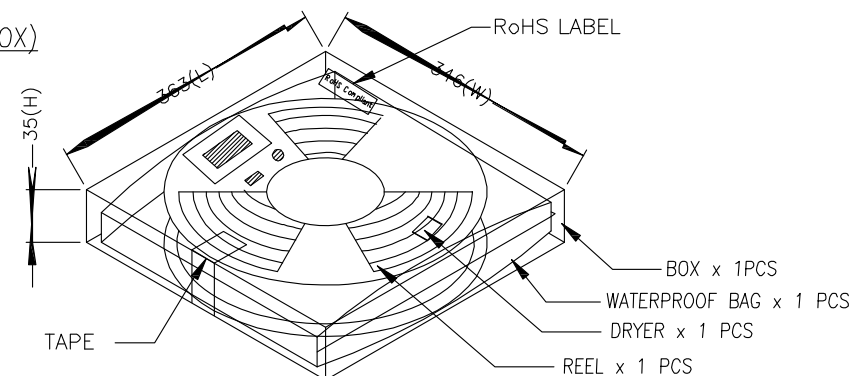

OUTER(CARTON)

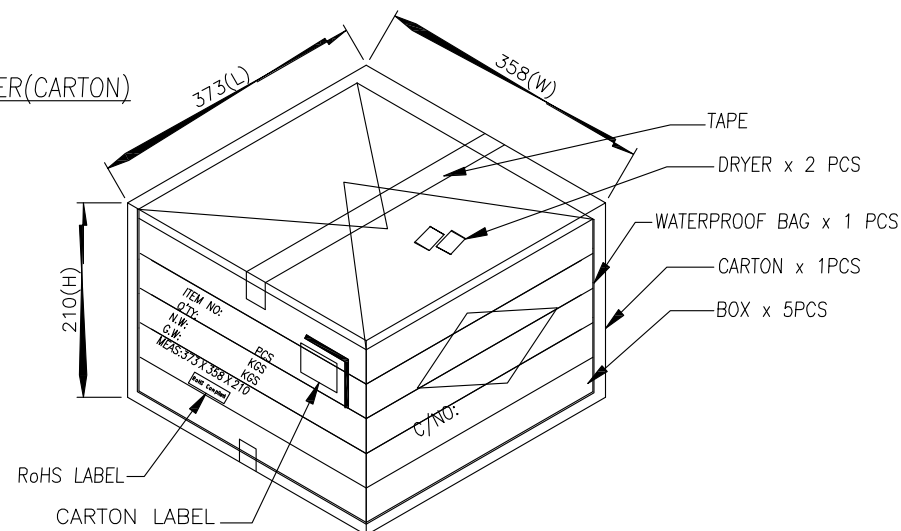

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SFP-SWPR-xx-LF
SERIES
LEADFREE
20.30WAY
REEL
POST
90°SMT
FEMALE

DESCRIPTION: SFP CONN., PCB MOUNT, SMT, WITH POST PACKING