

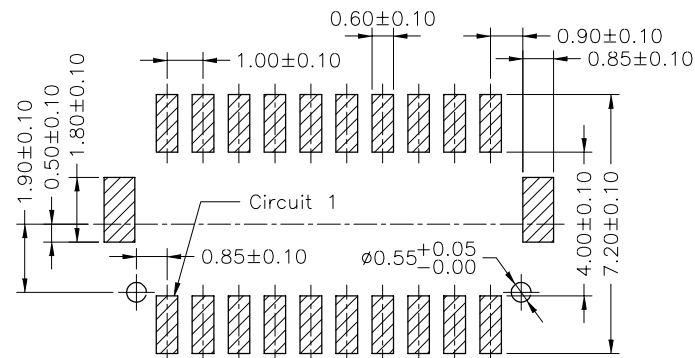
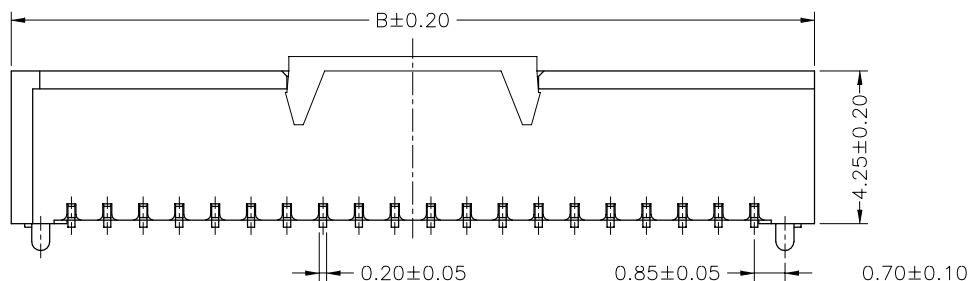


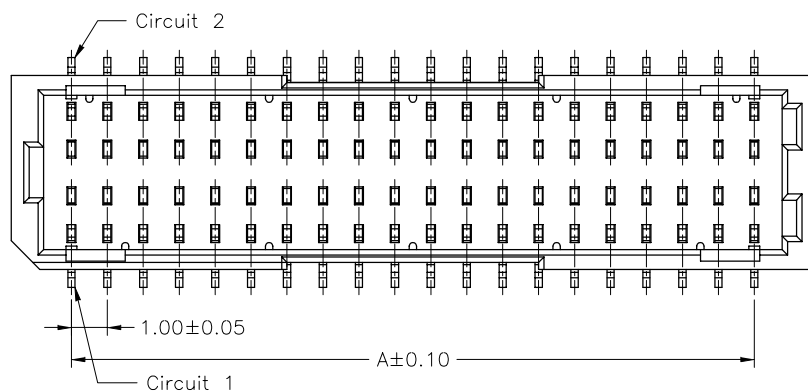

PCB LAYOUT

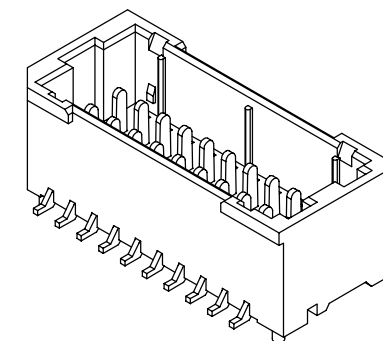

SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 50V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 500MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Brass/Gold-plated Or Tin Plated
 Solder Tabs: Brass/Tin-plated
 Wafer: Nylon 6T,UL94V-0
 Cover: Nylon 6T,UL94V-0

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
SHD-VPx-20	9.00	12.30
SHD-VPx-30	14.00	17.30
SHD-VPx-40	19.00	22.30
SHD-VPx-50	24.00	27.30

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SHD-VPx-xx-LF
 SERIES T LEADFREE
 20~50WAY
 G:GOLD
 T:TIN
 POST
 180°SMT

DESCRIPTION: 1.0mm 180°SMT TYPE DUAL ROW