

品 名Product：塑膠母座 HOUSING

材 質Material：P.B.T 94V-0

包裝數量Standard Packing：1000PCS/PACK

額定電壓／電流Current Rating：AC/DC 50V 1A(28AWG#)

AC/DC 30V 1A(30~32AWG#)


絕緣阻抗INS. Resistance：100M Ω Min.

耐 電 壓Withstand Voltage：500V AC/1minute.

適用溫度Operation Temp.：-40°C ~ +90°C

顏 色Color：本色(Natural)

：黑色(Black)

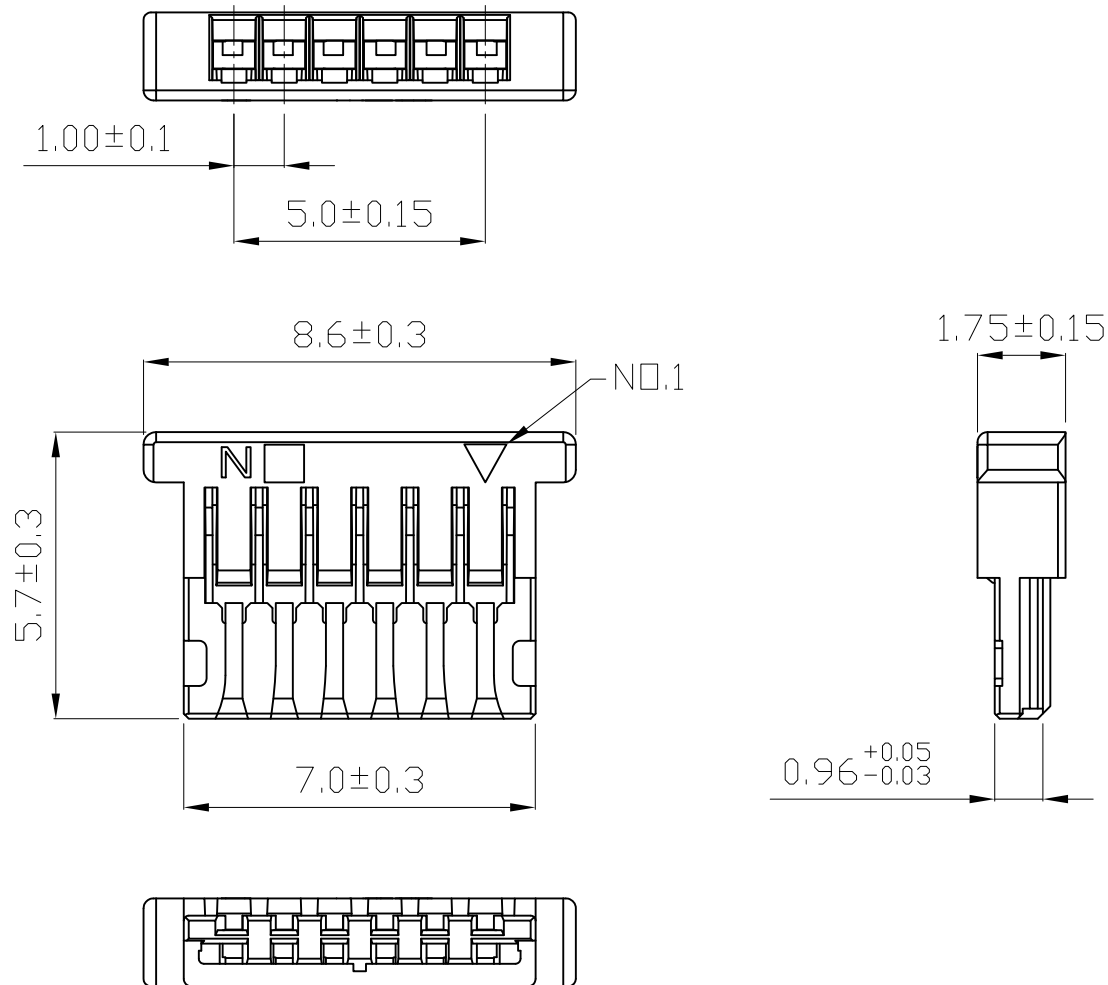

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.25
.XX $\pm$ 0.15
.XXX $\pm$ 0.05
ANG $\pm$

照片框

ORDER INFORMATION

SHL-H-06-LF
SERIES T LEADFREE
06 WAY
HOUSING

DESCRIPTION: