



Notes:

Base: High temperature plastic UL 94V-0, Color Nature




Contact: Copper alloy

Tab: Copper alloy with Matte Tin plated

For Lead Free IR Reflow Processes

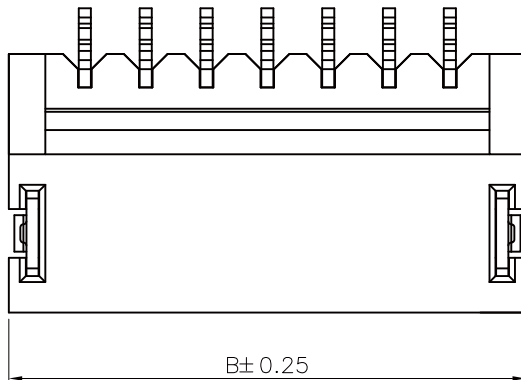

DIM. A = 1.00 x NO. OF SPACES
 DIM. B = DIM. A + 2.50
 DIM. C = DIM. A + 1.50
 * AVAILABLE IN 2 THROUGH 20

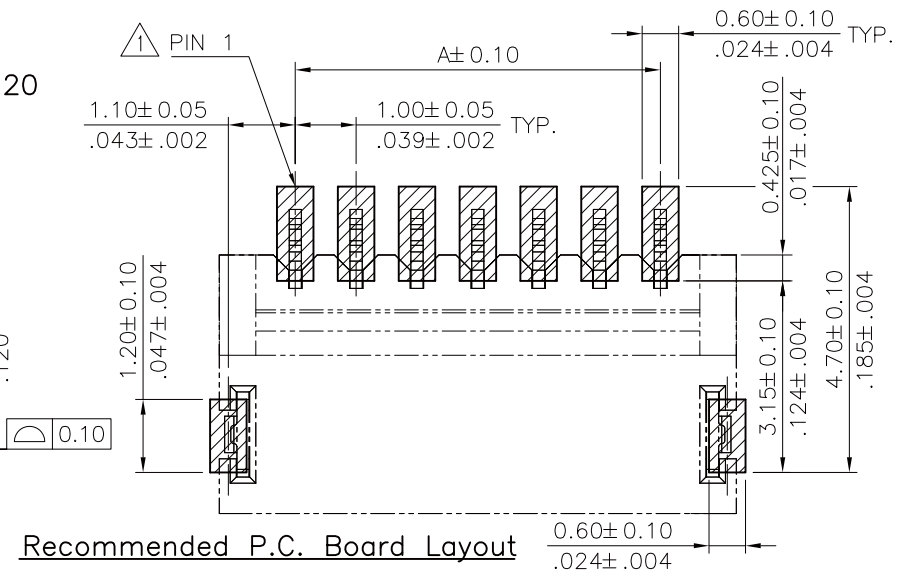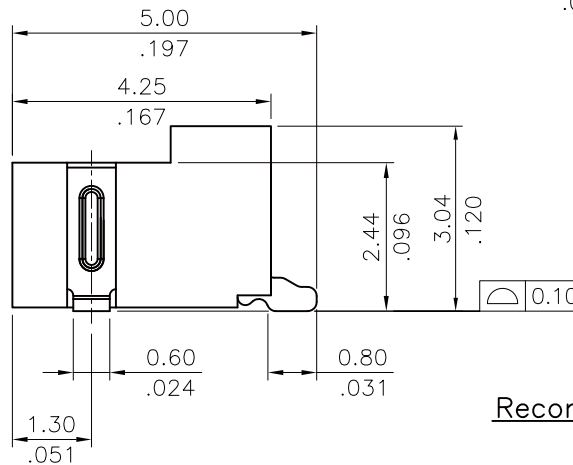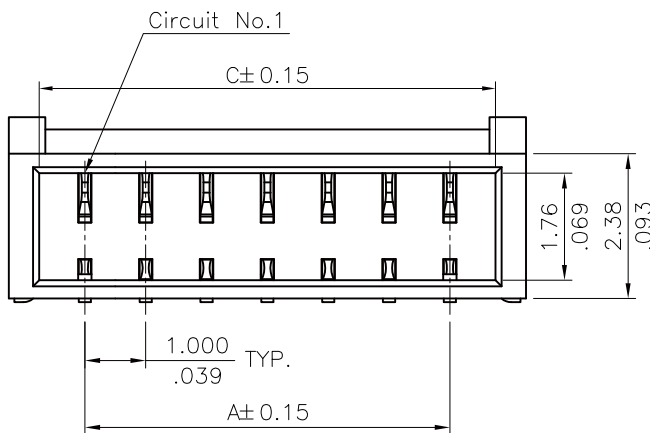

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
 .X ± 0.25
 .XX ± 0.15
 .XXX ± 0.08
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SHL1-W-xx-LF
 SERIES | LEADFREE
 02~20WAY
 90°SMT

DESCRIPTION: 1.00MM(.079") WIRE TO BOARD CONNECTOR