



Notes:

Base: High temperature plastic UL 94V-0, Color Nature

Contact: Copper alloy




Tab: Copper alloy with Matte Tin plated

For Lead Free IR Reflow Processes

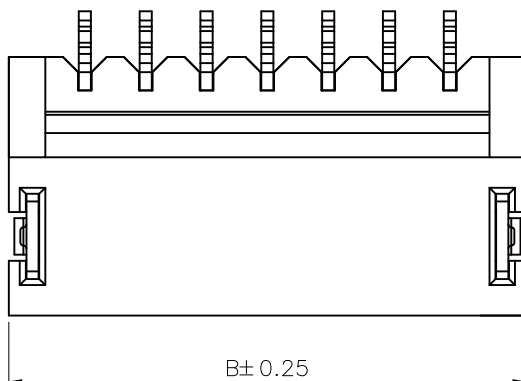

DIM. A = 1.00 x NO. OF SPACES
DIM. B = DIM. A + 2.50
DIM. C = DIM. A + 1.50

* AVAILABLE IN 2 THROUGH 20

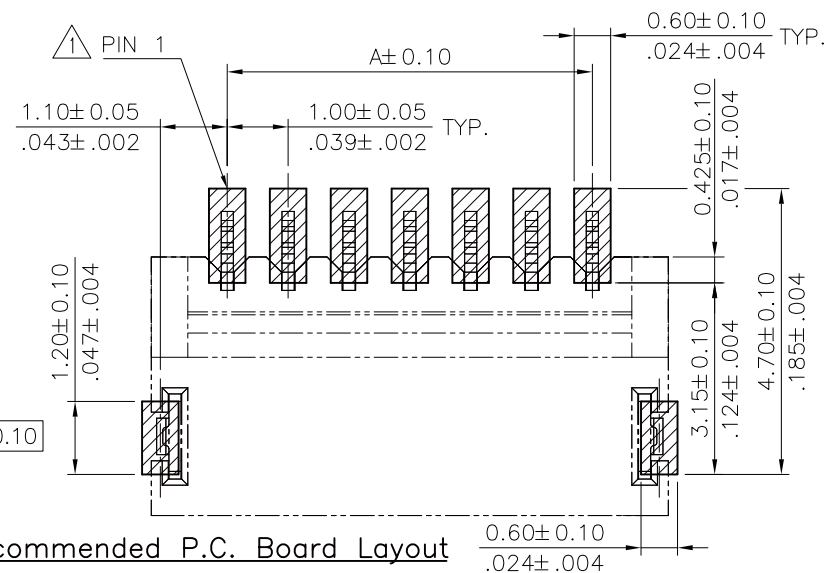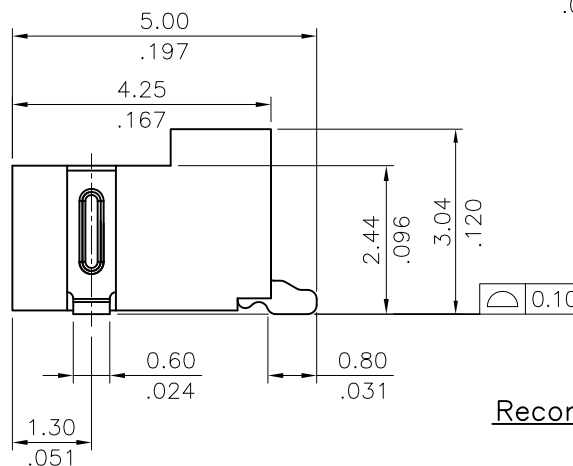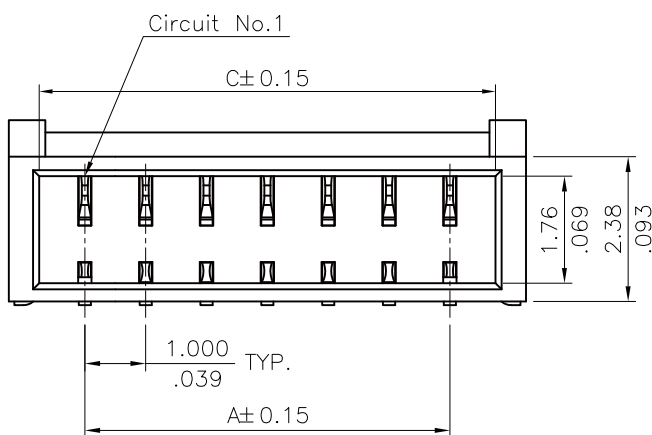

Recommended P.C. Board Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG ±

照片框


ORDER INFORMATION

SHL1-WR-xx-LF
SERIES | LEADFREE
02~20WAY
REEL
90°SMT

DESCRIPTION: 1.00MM(.079") WIRE TO BOARD CONNECTOR

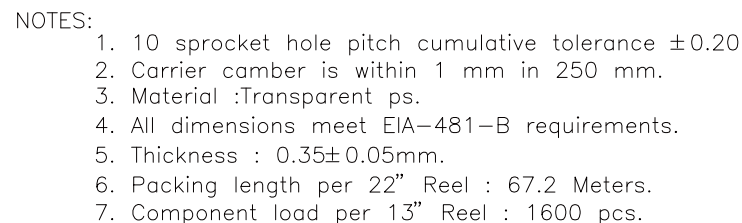

Circuits	Dimension					Packing (Reel/Carton)
	E	F	W1	W2	W3	
2-4	16.0(.630)	—	16.5(.650)	22.5(.886)	16.5(.650)	11
5-13	24.0(.945)	—	24.5(.965)	30.5(1.200)	24.5(.965)	9
14-20	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7

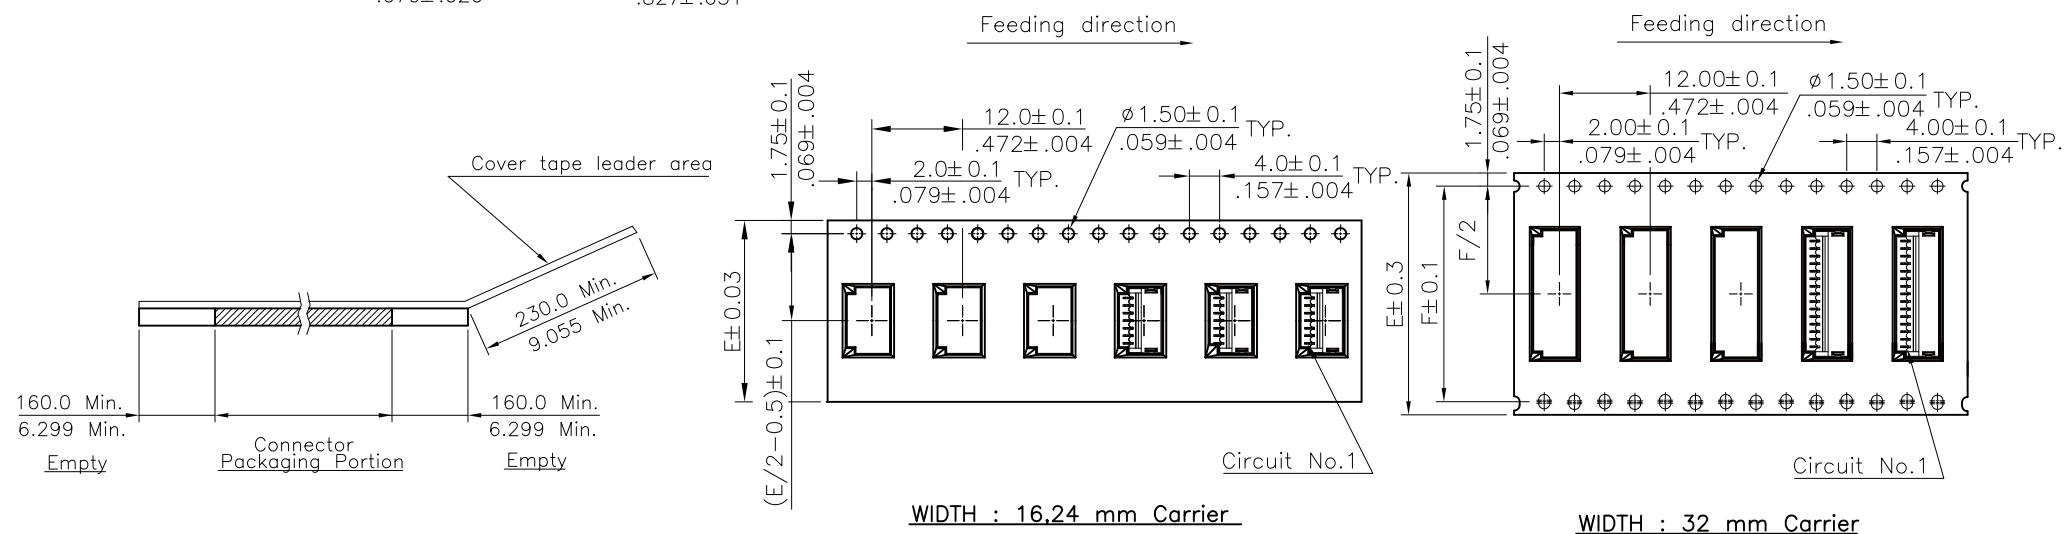

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm	SCALE 1 : 1
-----------	-------------

DATE _____

SIZE A4

TOLERANCES ARE

 $X_{\pm}$ $\cdot X_{\pm}$ $\cdot XX \pm$
$$\Delta NG \pm$$

AND 1

PPOJECTION 

照片框

ORDER INFORMATION

SHL1-WR-xx-LF

SERIES REEL 02~20WAY LEADFREE 90°SMT

DESCRIPTION: