

Specifications:

Current rating:1.0A AC/DC

Voltage rating:100V AC/DC

Contact resistance:15m ohm. max.

Insulator resistance:5000M ohm. Min.

Withstanding voltage:1000V AC for one minute

Operating temperature range:-40°C to +105°C


Material and Finish:

Insulator:PBT (UL94V-0)

Standard Color:Black


Contact:Beryllium Copper(Becu) Gold Plated

Sleeve Barrel:Copper Alloy Tin Plated



Note1: W/O middle bar(6~16P)
With middle bar(18~48P)

Circuits	DIM.A	DIM.B	DIM.C	DIM.D	Space	Circuits	DIM.A	DIM.B	DIM.C	DIM.D	Space
6	7.62	5.08	10.16	7.62	03	24	30.48	27.94	17.78	15.24	06
8	10.16	7.62	10.16	7.62		28	35.56	33.02	17.78	15.24	
14	17.78	15.24	10.16	7.62		32	40.64	38.10	17.78	15.24	
16	20.32	17.78	10.16	7.62		40	50.80	48.26	17.78	15.24	
18	22.86	20.32	10.16	7.62		42	53.34	50.80	17.78	15.24	
20	25.40	22.86	10.16	7.62		48	60.96	58.42	17.78	15.24	
24	30.48	27.94	10.16	7.62							
28	35.56	33.02	10.16	7.62							

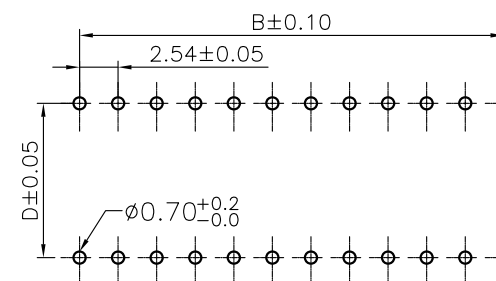

PCB Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG ±

照片框

ORDER INFORMATION

SIC-Dxx-xx-LF
SERIES LEADFREE
06~48WAY
03:SPACING 7.62mm
06:SPACING 15.24mm
DIP

DESCRIPTION: 2.54mm IC Socket Machine Pin