

CIRCUITS	DIM. A	DIM. B	DIM. C	SPACE
6	7.62	7.62	10.16	03
8	10.16	7.62	10.16	
14	17.78	7.62	10.16	
16	20.32	7.62	10.16	
24	30.48	15.24	17.78	06
28	35.56	15.24	17.78	
32	40.64	15.24	17.78	
40	50.80	15.24	17.78	

MATERIAL & FINISH

* Contact: Beryllium Copper (BeCu)

* Sleeve: Brass

Plating: G=Gold Plated

T=Tin Plated

* Insulator: IC Socket=PBT (UL94V-0)

* Insertion Standard Force: 300g max.

* Extraction Standard Test: 60g min.

* PBT Heat resisting durability: Max. 160~180°C, 5 Sec.

* Current Rating: 1A

* Operating Humidity Range: Annual mean 75%



* Contact Resistance : 10 Milliohm

* Insulator Resistance : 5000 Mege Ohm at 500 VDC

* Dielectric Strength : 1000 VRMS Min

* Rated Voltage : 100 VRMS / 150VDC

* Temperature: - 55°C TO + 125°C

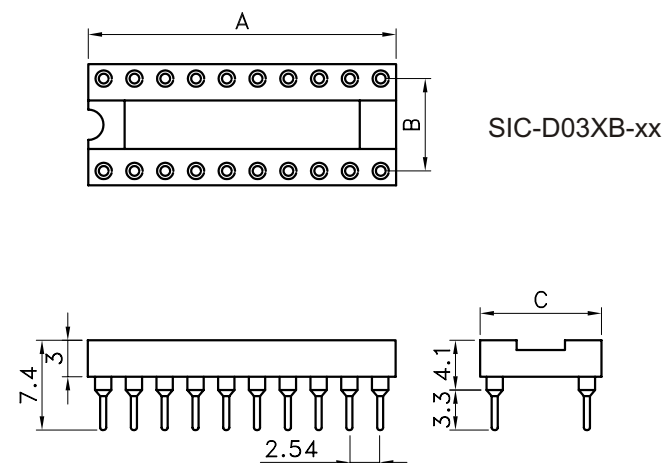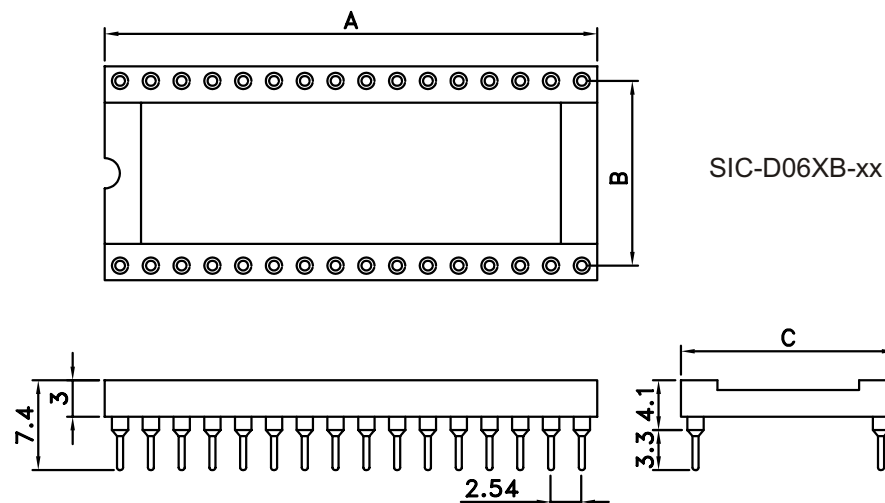

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

ORDER INFORMATION

SIC-DxxXB-xx-LF
SERIES | | LEADFREE
06~40WAY
NON BAR
DIP 180° 03:SPACING 10.16mm
06:SPACING 17.78mm

DESCRIPTION: SCREW MACHINE PIN IC SOCKET