

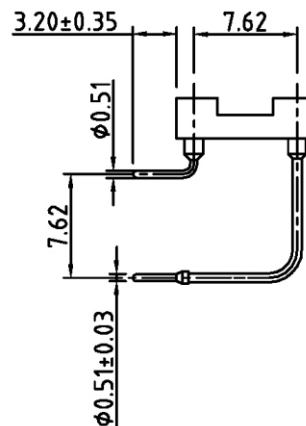
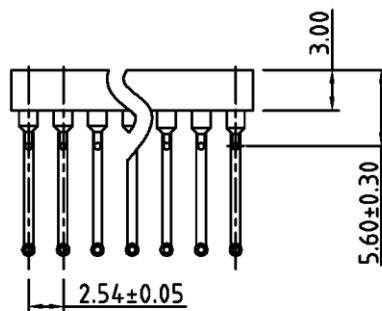




P.C.B. LAYOUT

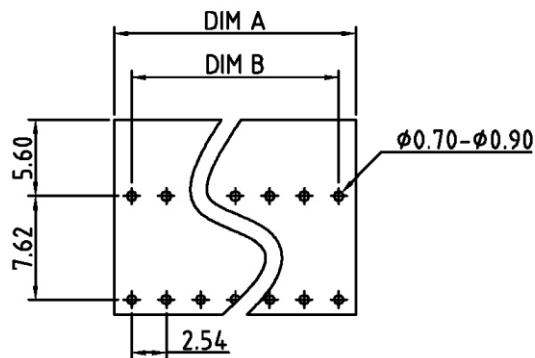

Technical Data:

Material:

- Pin (outer sieve) : Brass,machined, CuZn38Pb2
 - Clip(contact 4 finger):Beryllium copper,heat treated or PHBZ
 - Plating(outer sleeve) : Tin plated:2μm/80μ"nickel,5μm/200μ" Tin
Gold plated:2μm/80μ"nickel,Full gold
 - Plating(contact):2μm/80μ"nickel,gold or Tin plating
 - Insulator body(housing) :Glass filled thermoplastic Polyester UL94V-0
- ##### Electrical
- Current rating : 3 Amps/contact max.
 - Contact resistance : <4mΩ/contact
 - Insulation resistance: >10000MΩ at V=500VAC
 - Operating : 60 vac/DC
- ##### Mechanical
- Operating temperature: Gold plated:-55°C to +125°C (continuous) Tin plated:-40°C to +105°C
 - Average insertion force : <250g
 - with steel pin of Ø0.43mm/0.017"
 - Average withdrawal :>50g
 - force with steel pin of Ø0.43mm/0.017"
 - Mechanical life : min.200
 - Soldering temperture : +260°C,10s max.
- ##### Ordering information:

Contact	DIM A	DIM B	Contact	DIM A	DIM B
06	7.62	5.08	18	22.86	20.32
08	10.16	7.62	20	25.40	22.86
10	12.70	10.16	24	30.48	27.94
14	17.78	15.24	28	35.56	33.02
16	20.32	17.78			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SIC-R03-xx-LF
SERIES LEADFREE
06~48WAY
7.62mm PCB
DIP 90°

DESCRIPTION: