



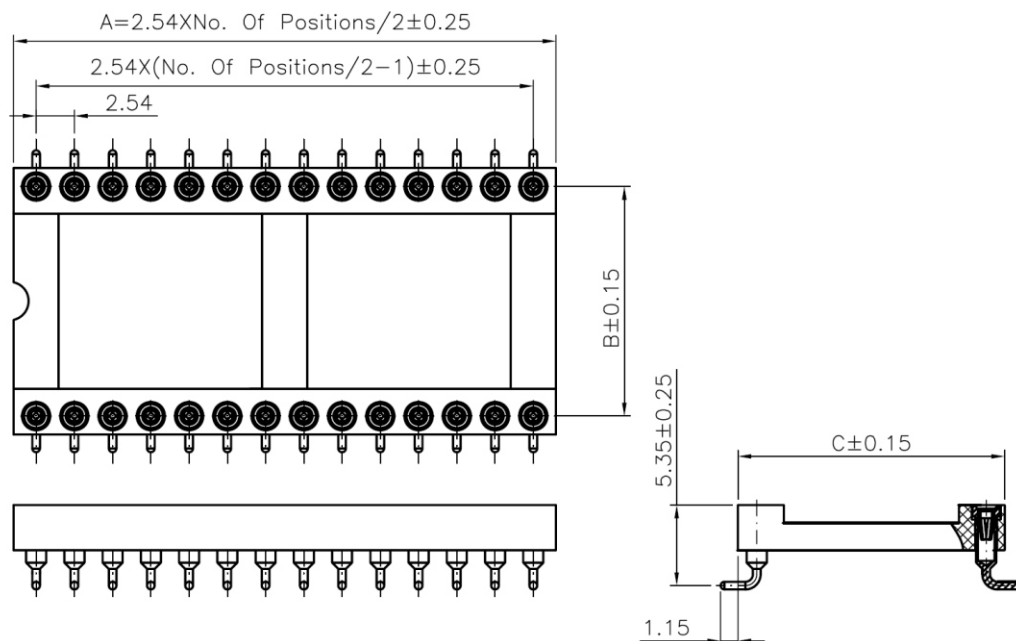

Circuits	DIM.A	DIM.B	DIM.C	Spacing	Circuits	DIM.A	DIM.B	DIM.C	Spacing
6	7.62	7.62	10.16	03	26	33.02	7.62	10.16	03
8	10.16	7.62	10.16		28	35.56	7.62	10.16	
10	12.70	7.62	10.16		24	30.48	15.24	17.78	06
12	15.24	7.62	10.16		28	35.56	15.24	17.78	
14	17.78	7.62	10.16		32	40.64	15.24	17.78	
16	20.32	7.62	10.16		36	45.66	15.24	17.78	
18	22.86	7.62	10.16		40	50.80	15.24	17.78	
20	25.40	7.62	10.16		42	53.34	15.24	17.78	
22	27.94	7.62	10.16		48	60.96	15.24	17.78	
24	30.48	7.62	10.16						

Specifications:
 Current rating: 1.0A AC/DC
 Voltage rating: 100V AC/DC
 Contact resistance: 10m ohm. max.
 Insulator resistance: 5000M ohm. Min.
 Withstanding voltage: 1000V AC for one minute
 Operating temperature range: -40°C to $+105^{\circ}\text{C}$
 Material and finish:
 Insulator: High Temp. Plastic (UL94V-0)
 Contact: Becu
 Finish: Tin Plated

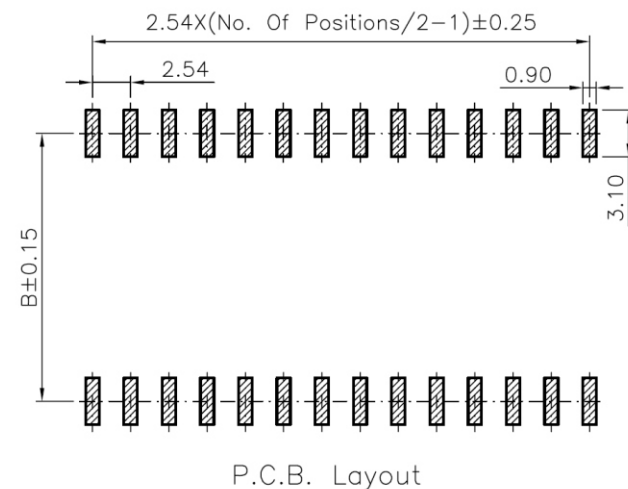

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

SIC-Vxx-xx-LF
 SERIES | LEADFREE
 06~48 WAY
 03: 7.62mm
 06: 15.24mm
 180°SMT

DESCRIPTION: