
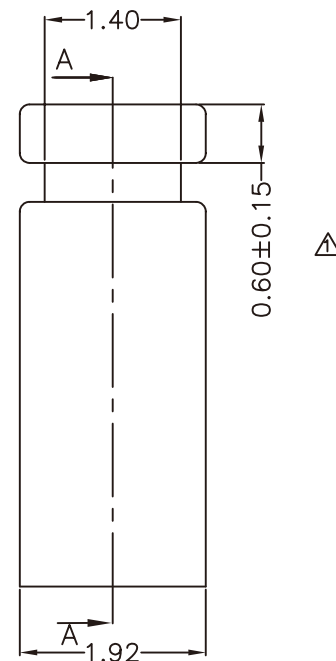


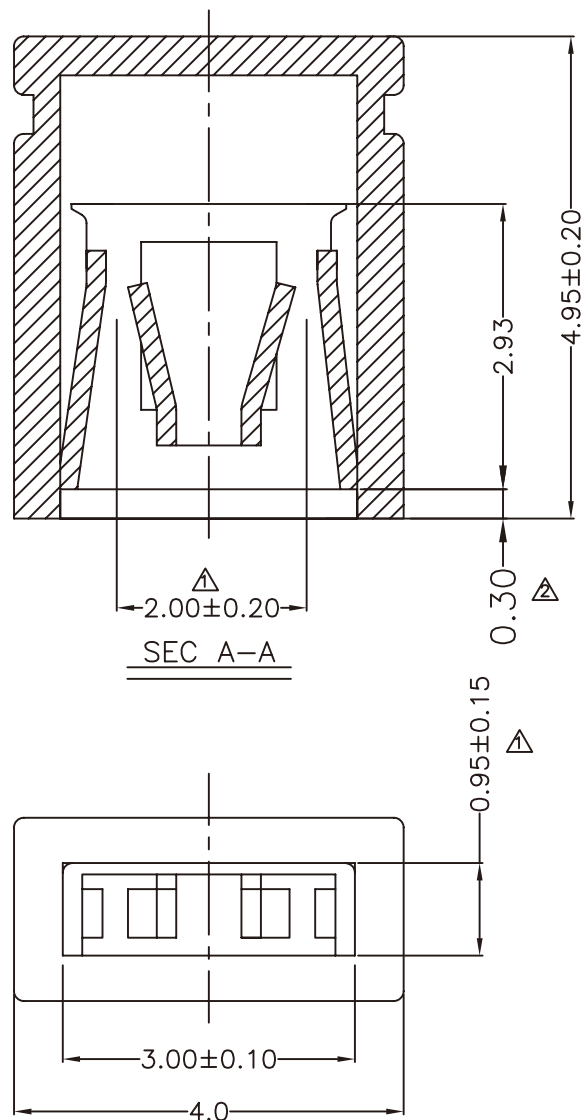

NOTES

1.MATERIAL

- 1.1 Insulator: P.B.T. +15% G.F. UL-94V-0
- 1.2 Contact: Phosphor Bronze
- 1.3 Plating: Gold Or Nickel Plated

2.SPECIFICATION

- 2.1 Current Rating: 3Amp
- 2.2 Dielectric Withstanding: AC 1000V min.Per minute
- 2.3 Insulation Resistance: 1000M ohms At DC 500V
- 2.4 Contact Resistance: 25 M ohms Max
- 2.5 Contact Insertion Force: 1kg max
- 2.6 Contact Separation force: 70g min
- 2.7 Operating Temperature: -55°C To +85°C

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

SJ-A-05-LF
SERIES | LEADFREE
HIGH 4.95mm
CLOSE

DESCRIPTION: MJ 2A黑 磷銅半面金