


MATERIAL

Contact Pin : Phosphor Bronze

Insulator : NY66+30%G.F

SPECIFICATION

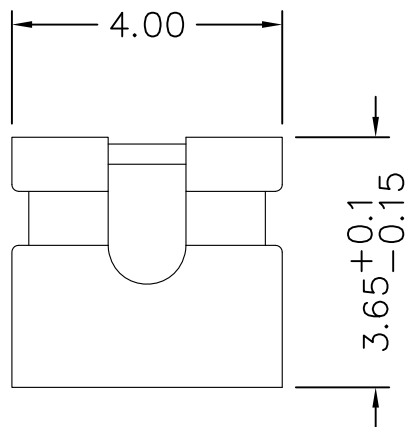

Current Rate : 3 AMP

Insulation Resistance : 5000M Ω Min. at DC 500V

Contact Resistance : 20m Ω Max. at DC 100mA

Dielectric Voltage : 500V AC for one minute

Operation Temperature: -40°C to +105°C

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$
ANG $\pm$

P PROJECTION



ORDER INFORMATION

SJ-B-03-LF
SERIES HIGH 3.5mm
LEADFREE
OPEN

DESCRIPTION: MINI JUMPER 2.0mm OPEN 3.5mm