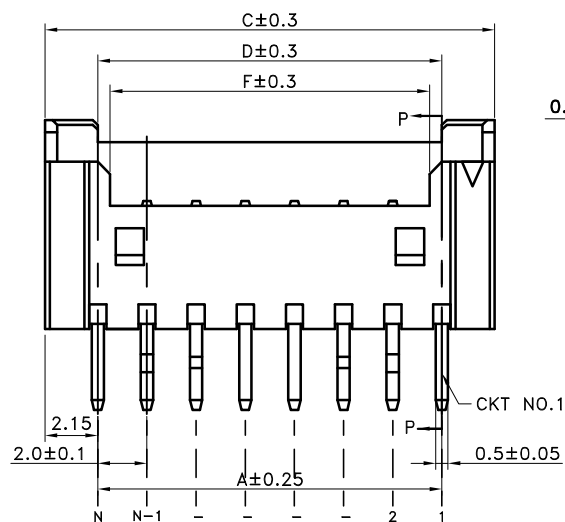
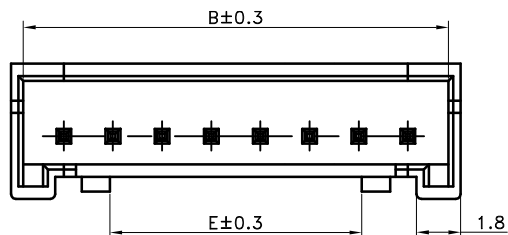
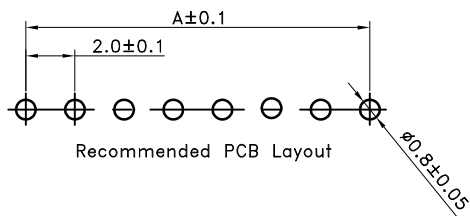


Mated Height(REF.)

#### SPECIFICATIONS

Voltage Rating : 125V AC/DC  
 Current Rating : 2A AC/DC  
 Withstanding Voltage : 1,000V AC/minute  
 Insulation Resistance : 1,000M $\Omega$  min.  
 Temperature Range : - 40° to + 105°  
 Contact Resistance : 20m $\Omega$  max.

#### WAFER

Poles : 4~20(Straight)  
 Material : Contact : Brass, Tin Plated  
 Base : PA66 UL94V-0  
 Q' ty : 1,000 Pcs/Tube Packing

| Poles | Part No. | Dimensions (mm) |      |      |      |      |      |
|-------|----------|-----------------|------|------|------|------|------|
|       |          | A               | B    | C    | D    | E    | F    |
| 4     | SLK-D-04 | 6.0             | 9.3  | 10.3 | 6.0  | 4.25 | 6.7  |
| 5     | SLK-D-05 | 8.0             | 11.3 | 12.3 | 8.0  | 4.25 | 7.0  |
| 6     | SLK-D-06 | 10.0            | 13.3 | 14.3 | 10.0 | 4.25 | 7.0  |
| 7     | SLK-D-07 | 12.0            | 15.3 | 16.3 | 12.0 | 4.25 | 7.0  |
| 8     | SLK-D-08 | 14.0            | 17.3 | 18.3 | 14.0 | 8.25 | 11.0 |
| 9     | SLK-D-09 | 16.0            | 19.3 | 20.3 | 16.0 | 8.25 | 11.0 |
| 10    | SLK-D-10 | 18.0            | 21.3 | 22.3 | 18.0 | 8.25 | 11.0 |
| 11    | SLK-D-11 | 20.0            | 23.3 | 24.3 | 20.0 | 8.25 | 11.0 |
| 12    | SLK-D-12 | 22.0            | 25.3 | 26.3 | 22.0 | 8.25 | 11.0 |
| 13    | SLK-D-13 | 24.0            | 27.3 | 28.3 | 24.0 | 8.25 | 11.0 |
| 14    | SLK-D-14 | 26.0            | 29.3 | 30.3 | 26.0 | 8.25 | 11.0 |
| 15    | SLK-D-15 | 28.0            | 31.3 | 32.3 | 28.0 | 8.25 | 11.0 |
| 16    | SLK-D-16 | 30.0            | 33.3 | 34.3 | 30.0 | 8.25 | 11.0 |
| 17    | SLK-D-17 | 32.0            | 35.3 | 36.3 | 32.0 | 8.25 | 11.0 |
| 18    | SLK-D-18 | 34.0            | 37.3 | 38.3 | 34.0 | 8.25 | 11.0 |
| 19    | SLK-D-19 | 36.0            | 39.3 | 40.3 | 36.0 | 8.25 | 11.0 |
| 20    | SLK-D-20 | 38.0            | 41.3 | 42.3 | 38.0 | 8.25 | 11.0 |

| Poles      | PIN No | 1 | 2 | 3 | 4 | 5 | 6 | N-2 | N-1 | N |
|------------|--------|---|---|---|---|---|---|-----|-----|---|
| 6 PIN Over |        | - | A | B | - | - | - | B   | A   | - |
| 6 PIN      |        | - | A | B | B | A | - |     |     |   |
| 5 PIN      |        | A | B | - | B | A |   |     |     |   |
| 4 PIN      |        | A | B | B | A |   |   |     |     |   |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.  $\pm$  0.30  
 .X  $\pm$  0.30  
 .XX  $\pm$  0.20  
 .XXX  $\pm$  0.10  
 ANG  $\pm$  1°

照片框

ORDER INFORMATION

SLK-D-xx-LF  
 SERIES LEADFREE  
 04~20WAY  
 DIP180°

DESCRIPTION: