


PCB LAYOUT

SIM	Name	FPC
C1,C6	VCC	8
C5	GND	7
C2	RST	6
C1,C6	VCC	5
C3	CLK	4
C7	DATA	3
CD-Pin	SIM_CD	2
C5	GND	1

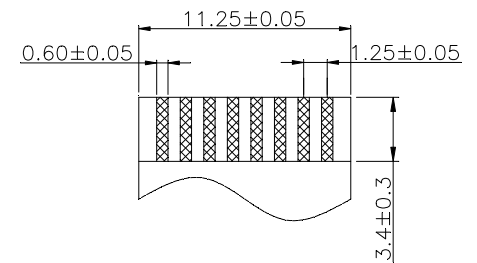

FPC/FFC T=0.30±0.05

- Note:
1. Plastic Housing: Engineering Thermoplastic  
Flammability Rating UL 94V-0.
  2. Nut: Engineering Thermoplastic  
Flammability Rating UL 94V-0.
  3. Contacts: Phosphor Bronze + Gold Plating Over Nickel In Contact.
  4. Gasket: Silicone.
  5. SIM: Nano SIM Push, SPPN07-A0-8500.
  6. FPC: GFP-330221-40804G.
  7. Nut Installation Torque Range: 16~18kg-cm.
  8. Waterproof Rated: IP68, Mated

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY		X. ± 0.50
CHECKED BY GENIUS		.X ± 0.38
UNIT / mm	SCALE 1 : 1	.XX ± 0.25
DATE		.XXX ± 0.10
		ANG ± 3°

照片框

ORDER INFORMATION

SLKNA-FRPBNO-06-LF  
SERIES | LEADFREE  
| 06 WAY  
| NUT / O-RING  
| PANEL BACK  
90°  
FPC

煜倫股份有限公司

www.morethanall.com

SIZE A4 PPROJECTION

DESCRIPTION: Nano SIM With FPC