

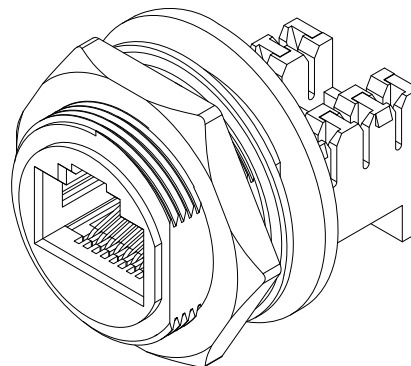
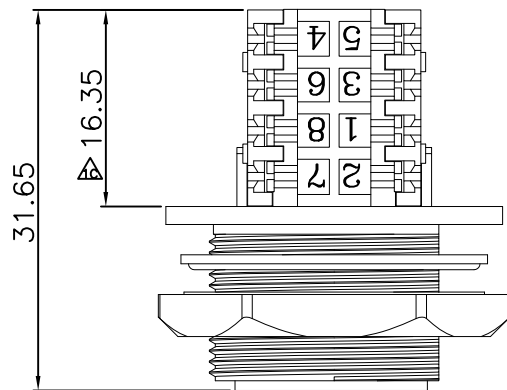
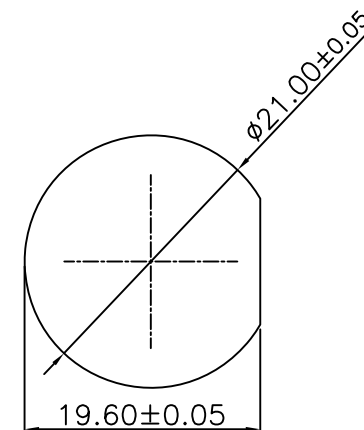


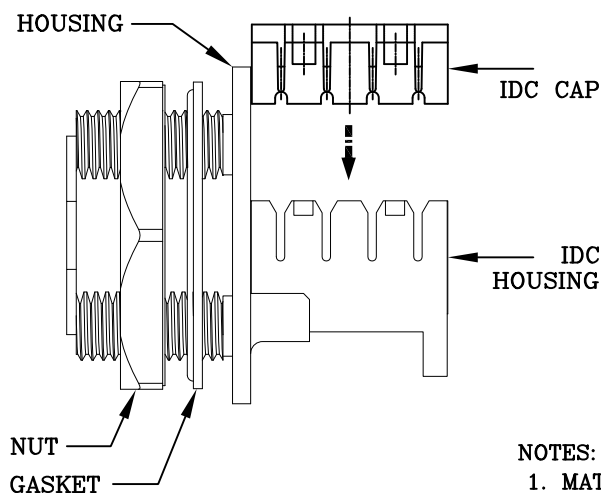

SPECIFICATIONS

Current rating : 1.5 Amps Max. @ 25°C.
 Voltage rating : 125 VAC MAX.
 Insulator resistance : 500M Ohms min .
 Contact resistance : 40 m ohm Max.
 Dielectric withstanding : AC 1000 V,RMS,60Hz for 1 minutes.
 Operating temperature : -0°C +80 °C
 Storage temperature : -40°C +80 °C

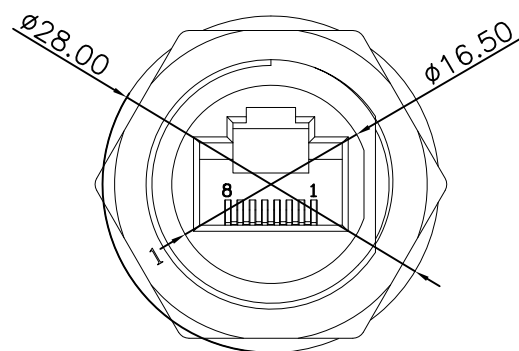

Panel Cut-Out
 Panel Thick:1.5~4.5mm

NOTES:

- MATERIAL:**
 - HOUSING&NUT: ENGINEERING THERMOPLASTIC, UL94V-0, COLOR:BLACK.
 - GASKET: SILICON, COLOR:RED.
 - CONTACT: PHOSPHOR BRONZE.
- FINISH:**
 - CONTACT: GOLD PLATING OVER NICKEL IN CONTACT.
 - IDC CONTACT: OVERALL TIN.
- WATERPROOF RATE:** IP68, MATED WITH CABLED SIDE.
- SPECIFICATION:** CAT.5E

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.38
 .X ± 0.25
 .XX ± 0.10
 .XXX ± 0.05
 ANG ±

PPOJECTION




ORDER INFORMATION

SLKRJ-STPBNW-0808-LF
 SERIES JACK IDT WASH NUT BACK PANEL
 8P8C LEADFREE


DESCRIPTION: 二代防水盒端+IDC

盒端使用手冊

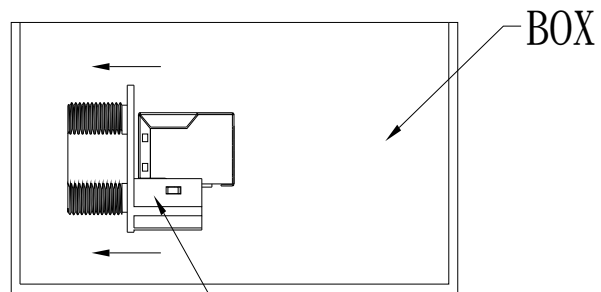


防水盒端

1. 將防水盒端依圖示方向，由內往外放入BOX的孔內。

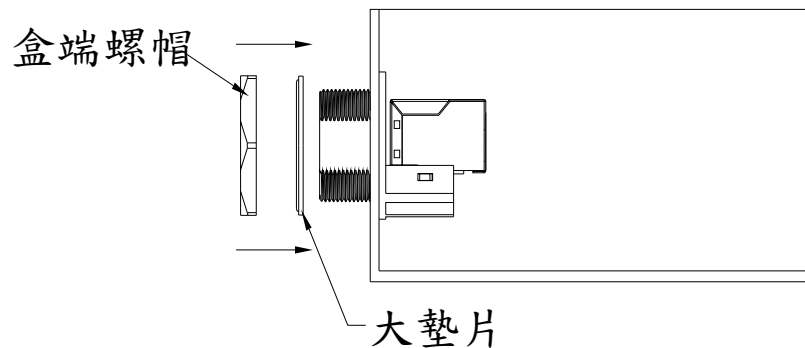


2. 先將大墊片依圖示方向放至底部，再將盒端螺帽依圖示方向旋至完全壓迫大墊片即可。

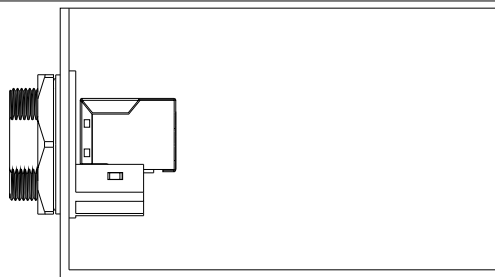


3. 此為組裝完成之盒端組立圖。


線&盒端使用手冊

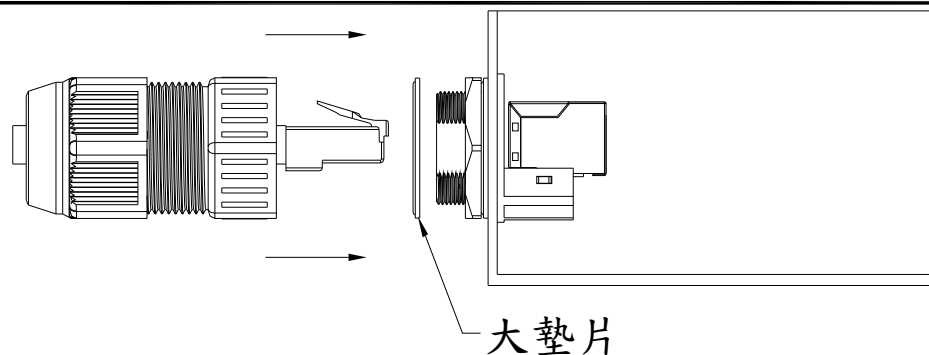

1. 請依圖示方向先將大墊片放至盒端螺帽上, 再將PLUG插入防水盒中.

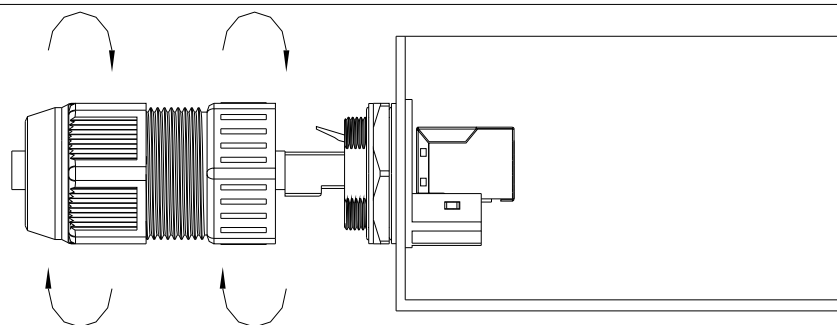

2. 請圖示先將線端主體和盒端旋緊, 再將盒端螺帽和防水盒端旋緊即可.

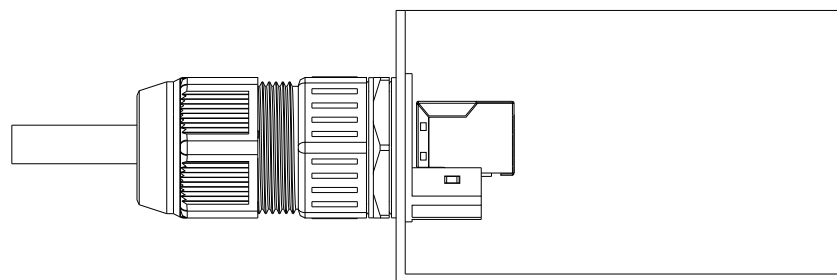

3. 此為組裝完成之成品組立圖.