
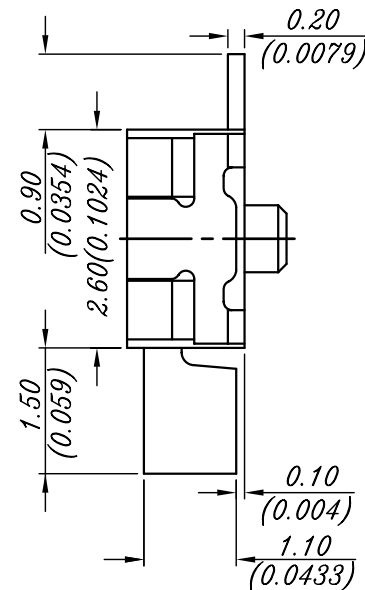
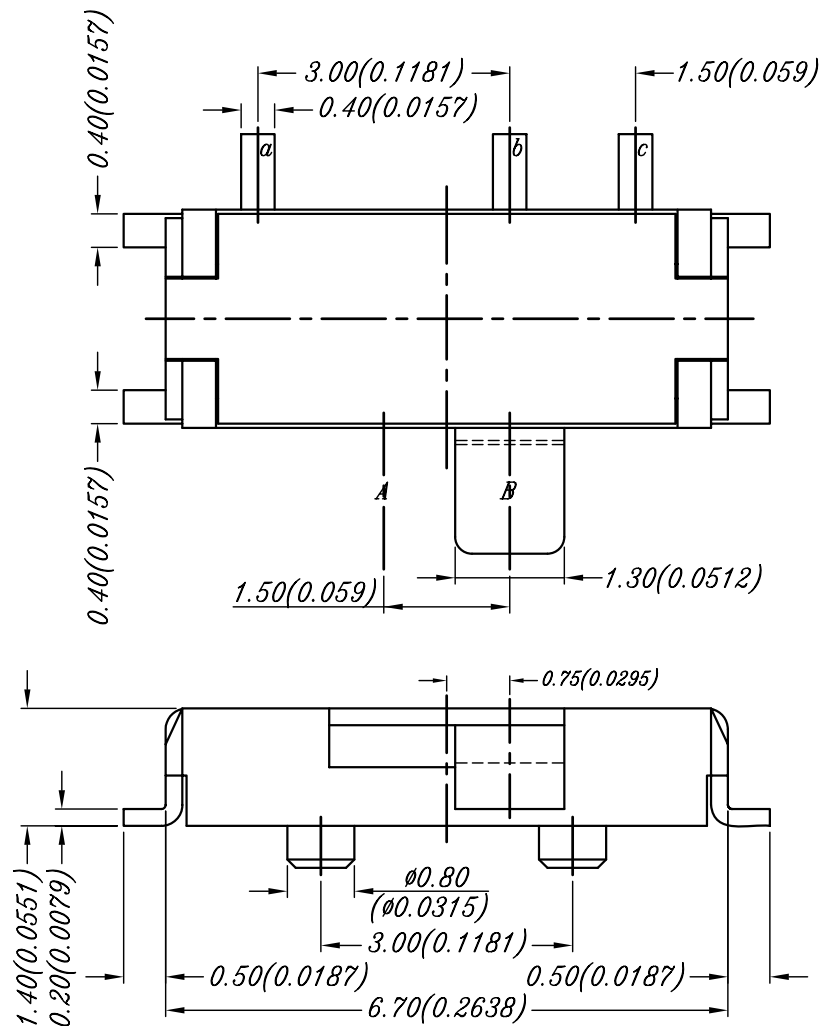


CIRCUIT DIAGRAM

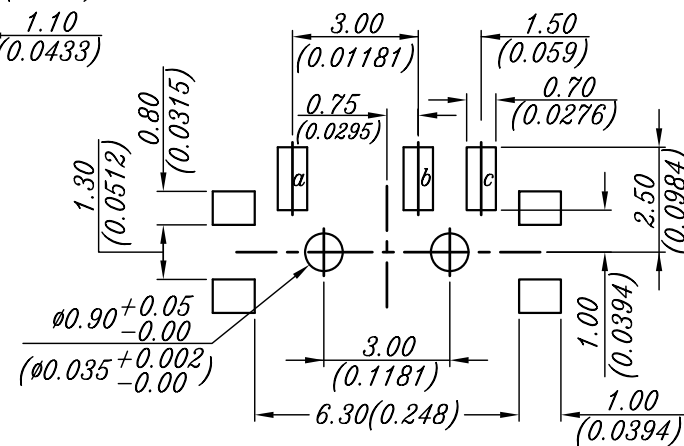

P.C.B. LAYOUT

NOTE:

1. ALL DIMENSIONS ARE IN MILLIMETERS, BRACKETED DIMENSIONS ARE IN INCHES.

2. GENERAL TOLERANCES MAX. $\pm 0.20\text{mm}$.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

SLSW15-WP030R-1X03-LF

SERIES

LEADFREE


03 WAY

REEL

POST 3.0mm

90°SMT

DESCRIPTION:

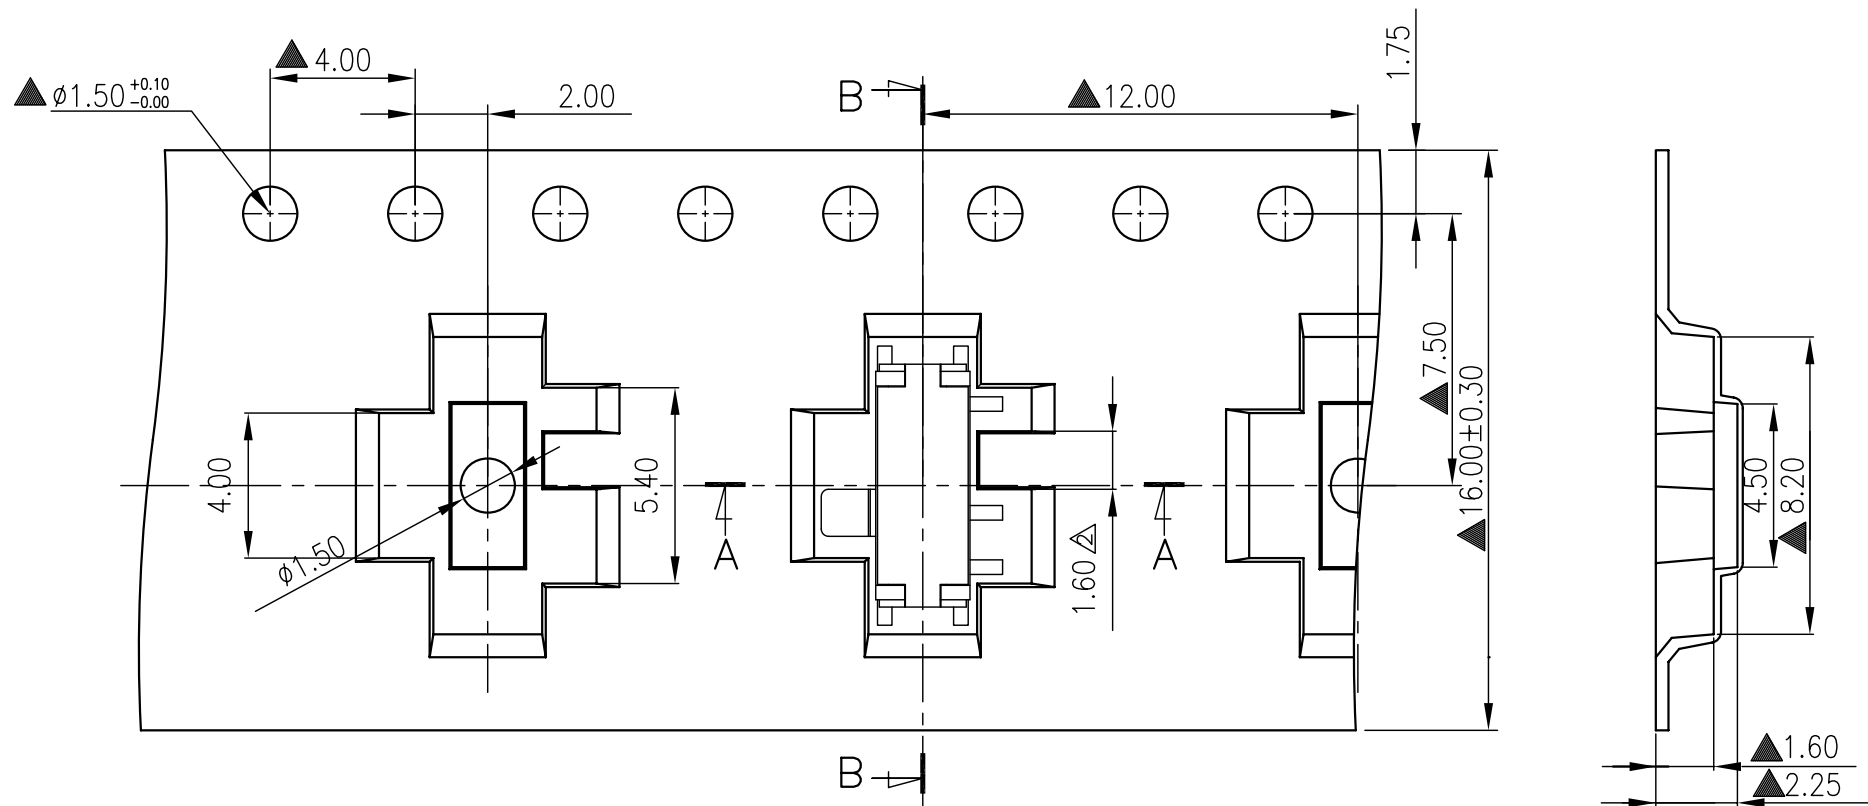

B-B Section

NOTE:
 1.Pitch Tolerance Over Any 10 Pitch ± 0.20 mm.
 2.Material: PS Black, Thickness: 0.35 ± 0.05 mm.
 3.General Tolerances Max ± 0.10 mm.

A-A Section

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG $\pm$

PPOJECTION

ORDER INFORMATION

SLSW15-WP030R-1X03-LF

SERIES

REEL

90°SMT

POST

3.0mm

03 WAY

LEADFREE

DESCRIPTION: