

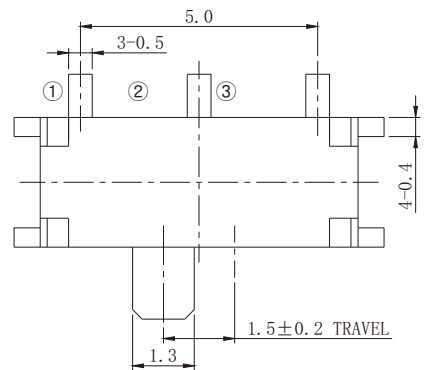


CIRCUIT DIAGRAM



P. C. B LAYOUT

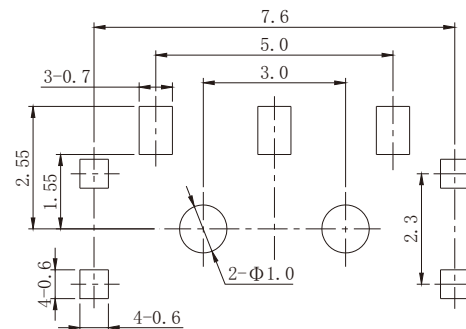

类 型	滑动开关	品 名	SLSW25-WP015R-1X03
1. 功能规格			
1.1 额定电压	DC4V	1.6 自由位置 (FP)	
1.2 额定电流	300mA	1.7 动作位置 (OP)	
1.3 接触电阻 (CR)	≤100mΩ (初始值)	1.8 行程 (PT)	1.5±0.2mm
1.4 操作力 (OF)	200±100gf	1.9 回弹力 (RF)	
1.5 灵敏度 (PT)	≤5ms	1.10	
2. 可靠度参数			
2.1 机械寿命	10,000 cycles	2.5 焊接工艺	手工焊、回流焊
2.2 电气寿命	10,000 cycles	2.6 操作温度	-25℃ ~ 80℃
2.3 绝缘电阻 (IR)	≥100MΩ DC100V	2.7 储存湿度	<85%RH
2.4 耐压强度 (WV)	AC100V 1 minute	2.8	

3. 尺寸规格图

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SLSW25-WP015R-1X03-LF

SERIES

LEADFREE

03 WAY

REEL


HANDLE HIGH 1.5mm

POST

180°SMT

DESCRIPTION:

Packing explaintion 包装说明

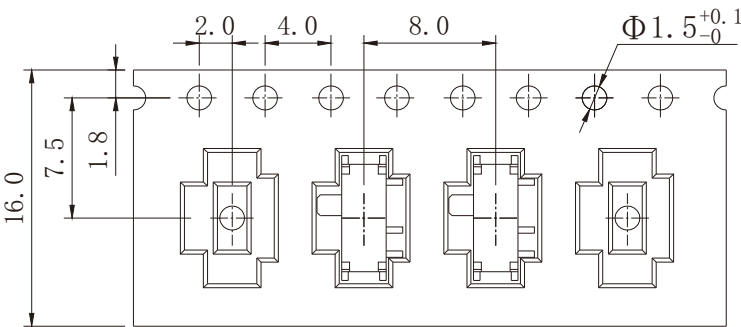Items 项目	Test conditions 测试条件	Criteria 标准
Packing 包装	(1) The products are packed in the taping packaging. 产品使用料带包装 (2) The number of the reels: 数量为一盘 (3) Fine(5)reels at maximum shall be packed in a package. 包装一般在5卷以下 (4) The number of the switches: 开关数量: (5) 3,000 switches shall be packed in a reel. 3,000个开关包装为1卷 (6) It should be noted that we Regard two cartons mentioned above as on package for export. 注意包装产品两侧硬胶之间不允许外露。 (7) Tape form and dimensions: 料带形状及尺寸	There shall be no defects in appearance or in the mechanical functions in the process of shipping. 在包装运输过程中没有出现任何外观和机械功能上的损伤。
		

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION 

照片框

ORDER INFORMATION

SLSW25-WP015R-1X03-LF

SERIES

LEADFREE

03 WAY

REEL

HANDLE HIGH 1.5mm

POST

180°SMT

DESCRIPTION: