
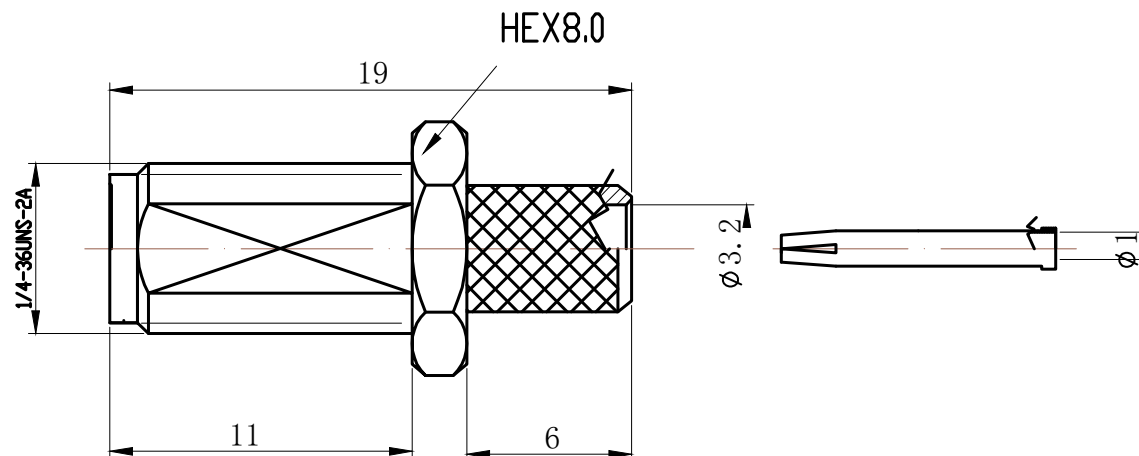


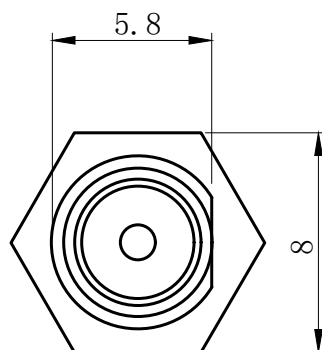

ELECTRICAL:

Impedance: 50 ohm

Frequency Range: DC-3 GHz

VSWR: 1.35 max.

Insulation Resistance: > 5000 MΩ

Rated Voltage: 1500V

Conductor Resistance:

Outer Conductor: < 0.2 MΩ

Inner Conductor: < 1.0 MΩ

5	O-ring	Silicon	1	Red
4	Ferrule	Brass	1	Nickel
3	Insulator	PTFE	1	Natural
2	Contact PIN	Brass	1	Gold
1	Body	Brass	1	Gold
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

RoHS Compliant

TOLERANCES ARE

0.5-15 = ±0.15
15-30 = ±0.30
30-120 = ±0.60
>120 = ±1.00

ANGLES
±5°

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

SMA-JCPB-58-LF
SERIES T T LEADFREE
RG58
PANEL BACK
CRIMP
JACK

DESCRIPTION: SMA plug crimp for RG58 cable

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com