
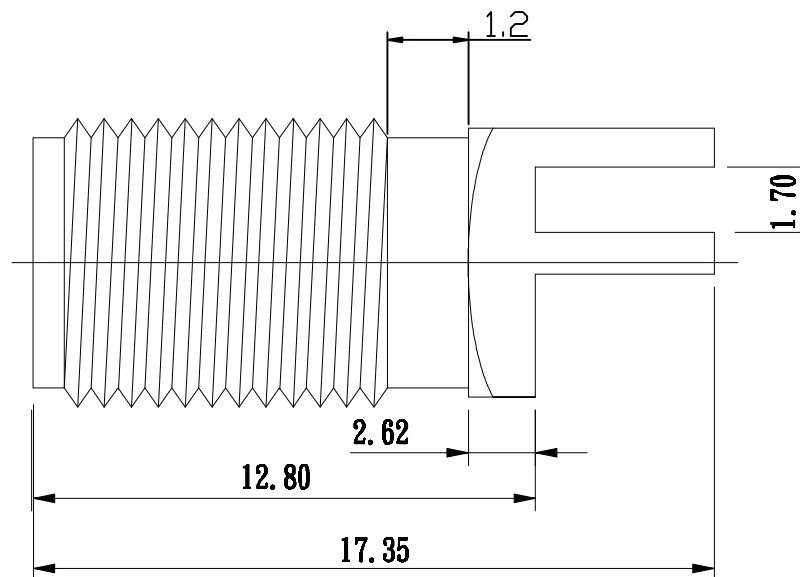


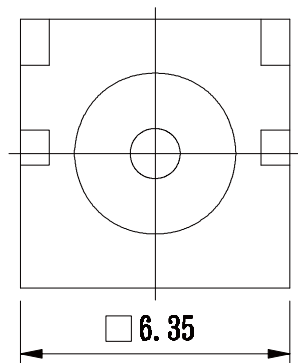

ELECTRICAL SPECIFICATIONS:

VOLTAGE RATING:AC 500V

WITH STANDING VOLTAGE:AC 1,000V ONE MINUTE



INSULATION RESISTANCE:5,000M Ω min AT DC 500V

CONTACT RESISTANCE:4 m Ω MAX AT DC 0.1A

FREQUENCY RANGE:0-12GHz

IMPEDANCE:50 Ω

5	NUT	BRASS	GOLD	1
4	Washer	BRASS	GOLD	1
3	DIELECTRIC	TRFLON	NONE	1
2	PIN	BRASS	GOLD	1
1	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

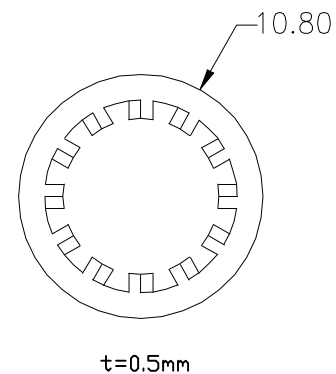

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

0.5-5 =±0.2
5-30 =±0.4
30-120 =±0.6
120-315 =±1
315-1000 =±1.6
1000-2000 =±2.4

PPOJECTION



ORDER INFORMATION

SMA-JE17PBNW-50-LF

SERIES JACK EDGE CLIP 1.70mm
NUT BACK PANEL
LEADFREE
50 OHM
WASHER

DESCRIPTION: SMA PC MOUNT