

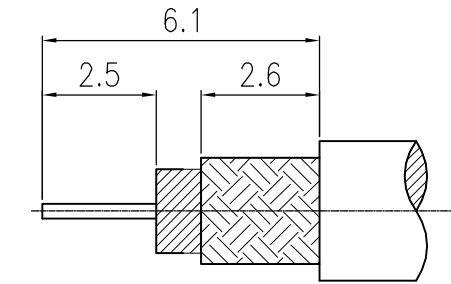



3.PIN

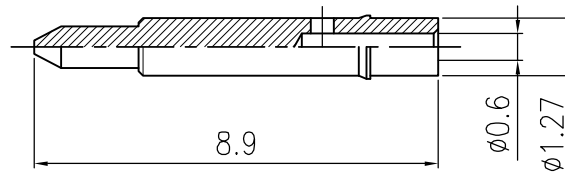


RECOMMENDED CABLE STRIPPING DIM'S

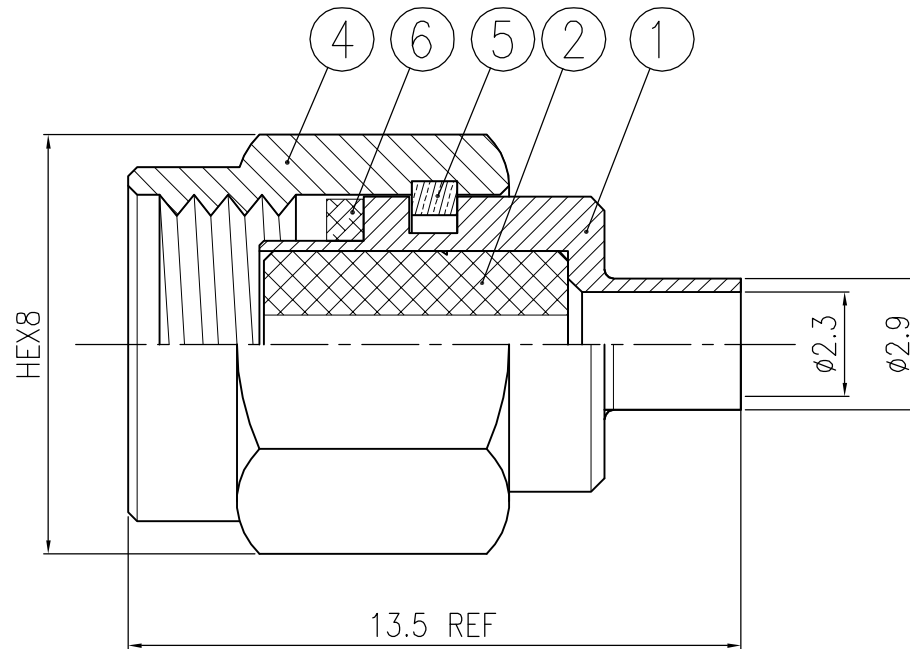

7.INSULATOR



8.FERRULE

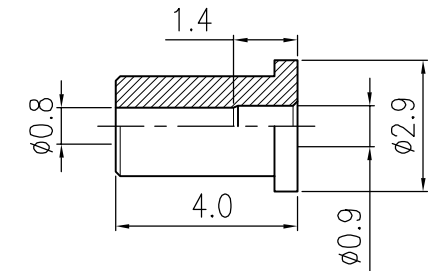

8	FERRULE	BRASS	GOLD	1
7	INSULATOR	TEFLON	NONE	1
6	GASKET	SI-RUBBER	RED	1
5	RETAINER RING	STAINLESS	NONE	1
4	SHELL	BRASS	GOLD	1
3	PIN	BRASS	GOLD	1
2	INSULATOR	TEFLON	NONE	1
1	BODY	BRASS	GOLD	1
ITEM	DESCRIPTION	MATERIAL	FINISH	Q'TY

RoHS Compliant

TOLERANCES ARE

ANGLES = $\pm 3^\circ$
 0.5~6 = ± 0.1
 6~40 = ± 0.2
 40~120 = ± 0.6
 120~315 = ± 1.0
 ABOVE 315 = ± 1.6

照片框

ORDER INFORMATION

SMA-PC-081-LF
 SERIES | LEADFREE
 RG 0.81
 CRIMP
 MALE

DESCRIPTION: SMA Male Crimp for 0.81mm Cable

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION