



NOTES: TYPICAL SPECIFICATIONS

1.0. ELECTRICAL DATA

- 1.1. FREQUENCY RANGE --- DC ... 6 GHz
- 1.2. IMPEDANC --- 50 Ohms
- 1.3. VSWR --- < 1.25
- 1.4. DIELECTRIC WITHSTANDING VOLTAGE --- 500 Vrms
- 1.5. WORKING VOLTAGE --- 170 Vrms max.
- 1.6. INSULATION RESISTANCE --- 5000 Mega-Ohms
- 1.7. CENTER CONTACT RESISTANCE --- 4.0 mini-Ohms
- 1.8. OUTER CONTACT RESISTANCE --- 2.5 mini-Ohms

2.0. MECHANICAL DATA

- 2.1. COUPLING METHOD --- THREADED
- 2.2. DURABILITY (MATING/UNMATING) --- 500 Cycles
- 2.3. COUPLING NUT RETENTION --- 60 lbs
- 2.4. MATING TORQUE --- 10 in-lbs max.

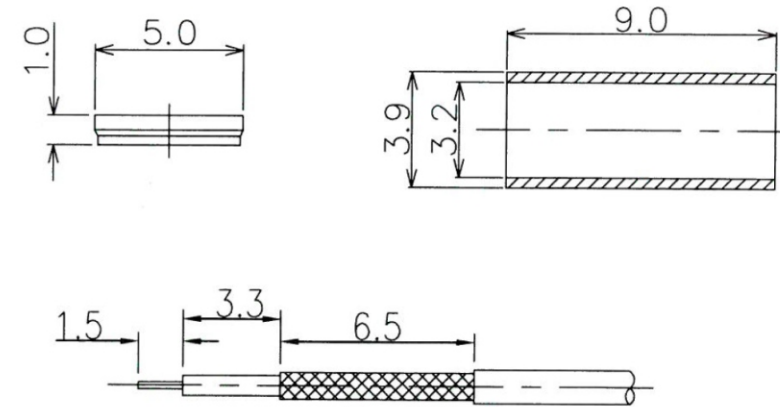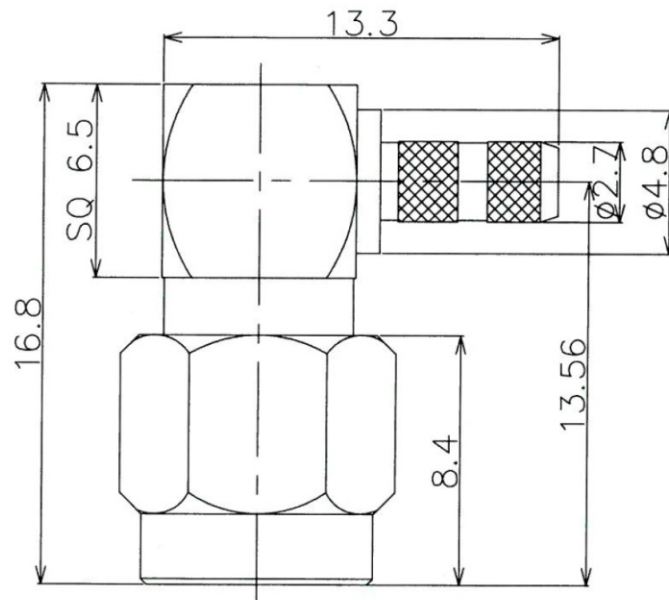

△ RECOMMENDED CABLE STRIP

9	CAP	BRASS	GOLD	1
8	SLEEVE	BRASS	NICKEL	1
7	BODY	BRASS	GOLD	1
6	GASKET	SILICON		1
5	C-RING	SPRING STEEL	NICKEL	1
4	CENTER PIN	BRASS	GOLD	1
3	INSULATOR	TEFLON		1
2	REAR BODY	BRASS	GOLD	1
1	SHELL	BRASS	GOLD	1
ITEM	ITEM NAME	MATERIAL	FINISH	Q'TY/EA

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.38

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ± 0.05

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

SMA-PCR-316-LF
 SERIES T T T LEADFREE
 RG 316
 90°
 CRIMP
 MALE

DESCRIPTION:

MALE RIGHT ANGHT CRIMP RG 316

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com