



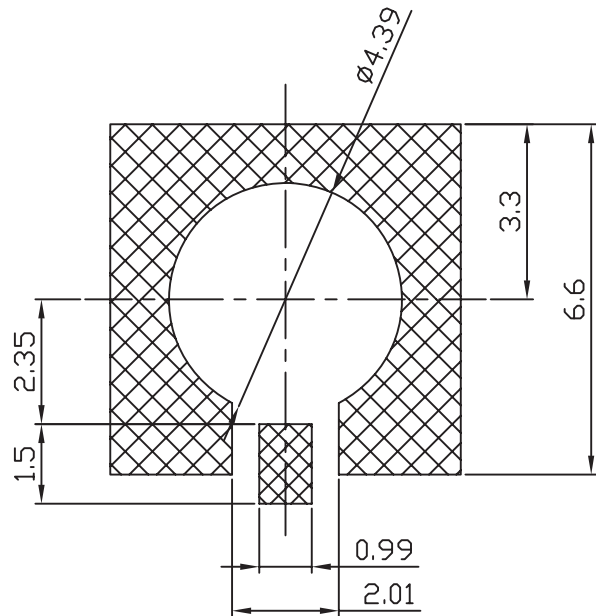


RECOMMENDED PCB PAD LAYOUT

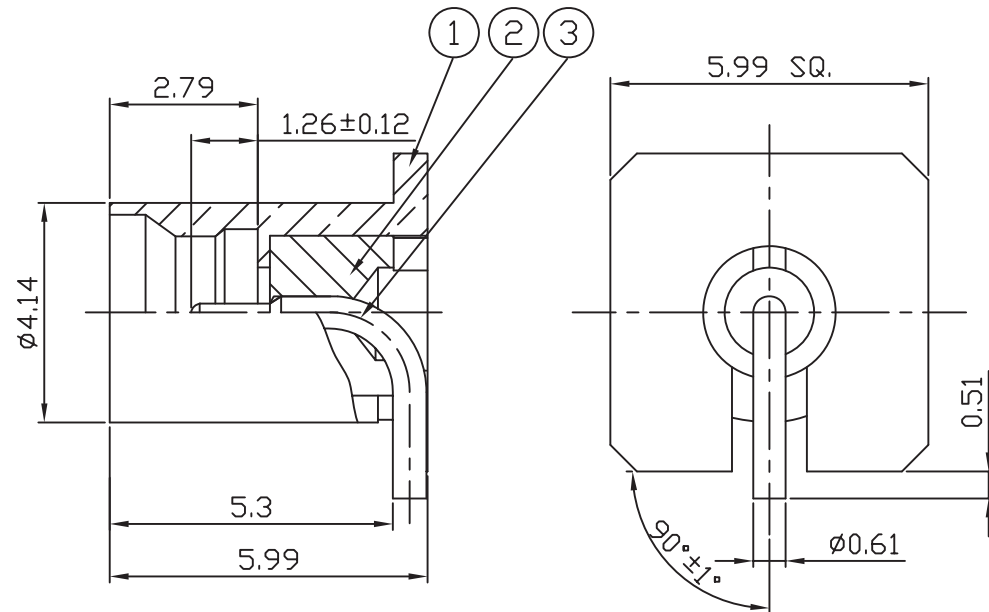

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. BERYLLIUM COPPER PER QQ-C-530
3. GOLD PL 30 MIN. THICK OVER COPPER PL. 100 MIN. THICK.(30GB)
4. PEEK(POLYETHERKETONE) 30% GLASS FILLED. PER MIL-P-46183



SCALE 4:1

3	CONTACT PIN	1	NOTE 2	NOTE 3
2	INSULATOR	1	NOTE 4	NATURAL
1	BODY	1	NOTE 1	NOTE 3
NO.	DESCRIPTION	QTY	MATERIAL	FINISH

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PROJECTION

照片框

ORDER INFORMATION

SMP-PVX59-50-LF

SERIES
LEADFREE
50 OHM
HIGH 5.99mm
NON POST
180°SMT
MALE

DESCRIPTION: SMP(M Contact) S/T Jack For P.C.B Mount