
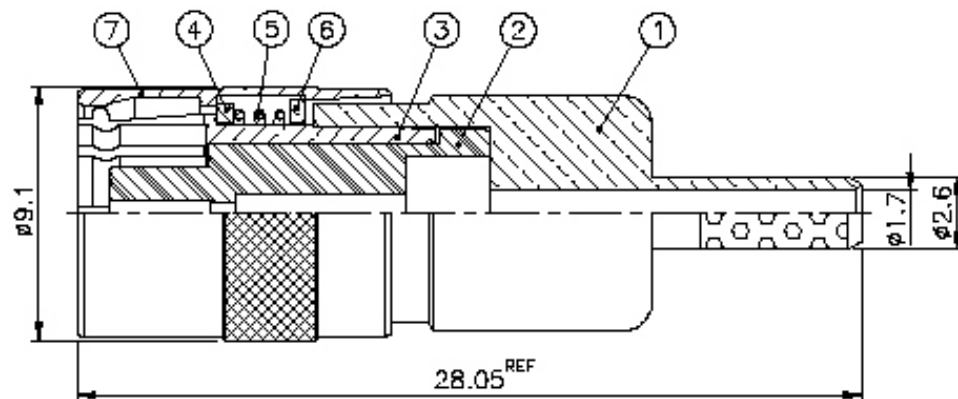


NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. PHOSPHOR BRONZE PER QQ-B-750
6. GOLD PL FLUSH OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
7. BRASS JIS H 3250, C 2700
8. BRASS PER QQ-B-613

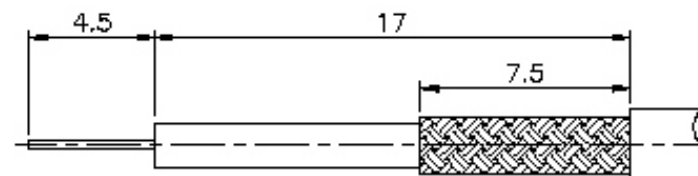

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
(套管壓接工具)
2. CONTACT PIN TO SOLDER
(中心針焊接)

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY
9	FERRULE	NOTE 7	NOTE 2	1
8	CONTACT PIN	NOTE 5	NOTE 6	1
7	SHELL	NOTE 1	NOTE 2	1
6	C RING	NOTE 8	NOTE 2	1
5	SPRING	STEEL	NOTE 2	1
4	WASHER	NOTE 8	NOTE 2	1
3	CONTACT BODY	NOTE 5	NOTE 3	1
2	INSULATOR	NOTE 4	WHITE	1
1	BODY	NOTE 1	NOTE 2	1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SMZ-PC-179-LF
SERIES | T | LEADFREE
RG 179
CRIMP
PLUG

DESCRIPTION: