



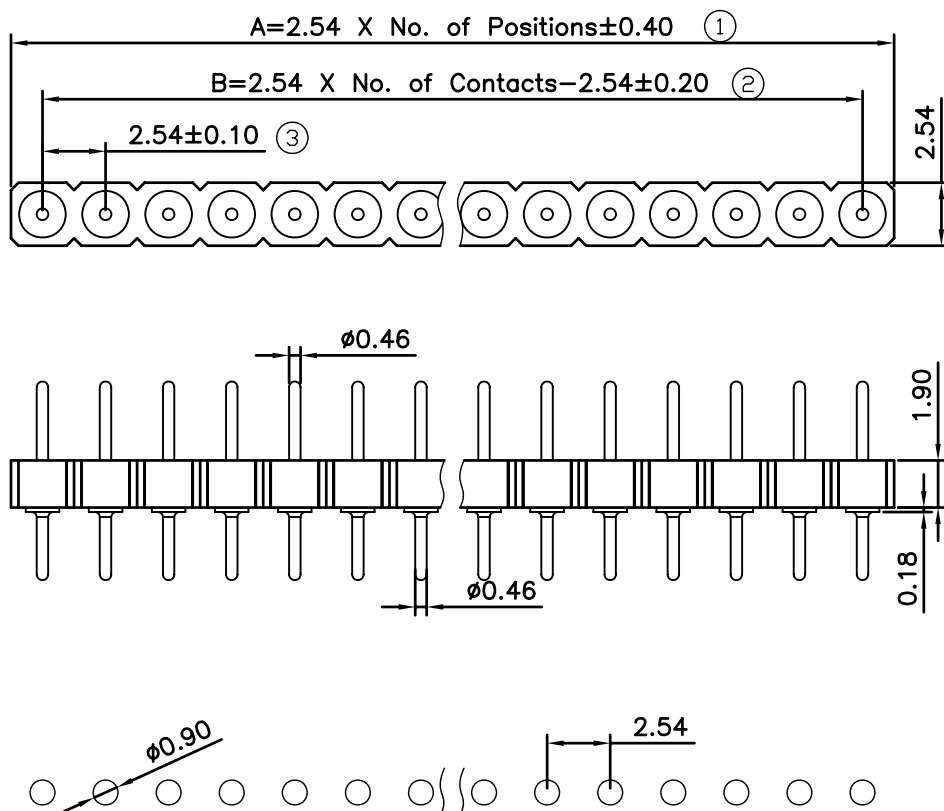

P.C.B LAYOUT

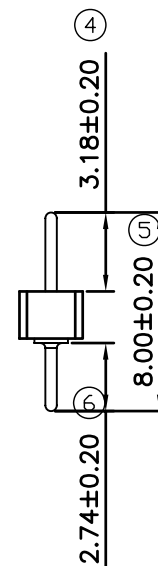

Technical Data

Material:

Pin(outer sleeve): Brass, machined CuZn38Pb2

Plating(outer sleeve):

Tin plated: 2μm/80μ"Ni, 5μm/200μ"Sn

Gold Plated: 2μm/80μ"nickelfull gold

Plating(contact): 2μm/80μ"nickel, gold or Tin plated

Insulator black(housing): PPS (UL94V-0)

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: ≤ 4mΩ/contact

Insulation resistance: ≥ 1000MΩ at V=100V

Operating voltage: 60VAC/DC

Mechanical:

Mechanical life cycle: min.200

Operating temperatures: Gold Plated: -55°C to +105°C

Tin plated: -40°C to +105°C

Soldering temperature: +260°C, 10s max

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

SP-D19G-1Xxx-LF
 SERIES LEADFREE
 1X02:02 WAY
 1X40:40 WAY
 DIP 180° GOLD PLATE
 HIGH 1.9mm

DESCRIPTION: 2.54mmPitch Sip Sockets Single Row Straight Pin Length 8.0mm