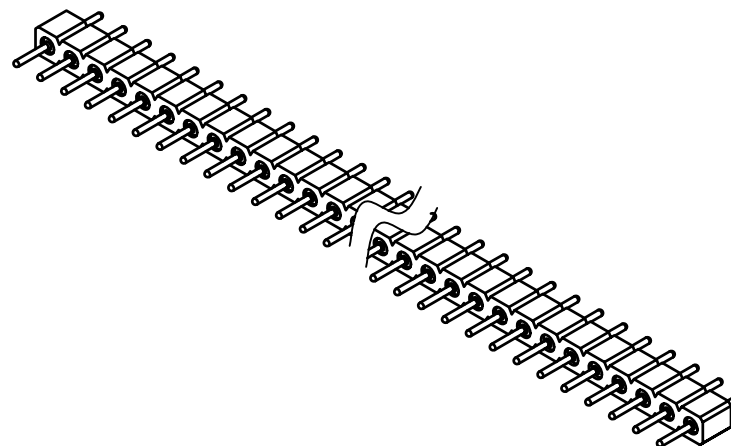
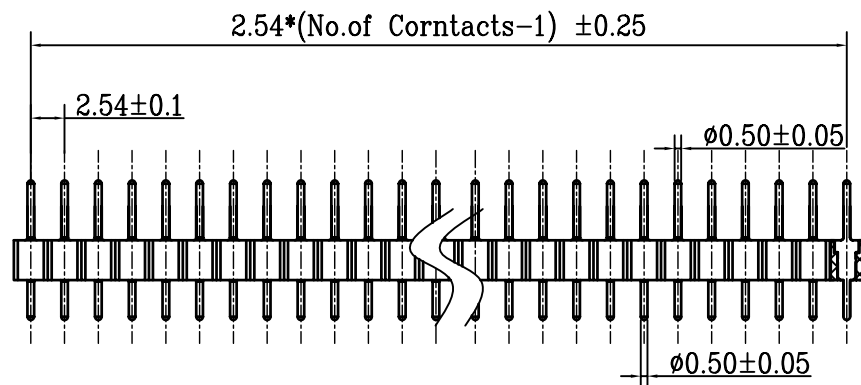


P. C. Board Layout

ELECTRICAL:

Current rating:
3.0Amps/Contact MAX
Contact resistance:
20mΩ / Contact MAX
Insulation resistance:
1000MΩ at V=100V MIN
Operating voltage:60V AC/DC

MECHANICAL

Operating temperatures:
-40°C to +105°C
Soldering Temperature:
+260°C, 10S MAX

Material

PIN: Brass,machined
Plating(PIN):50u" NI,GOLD FLASH
Insulator body(Black):
PPS or other(UL94V-0)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50
.X ± 0.20
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SP-D30G5030-1Xxx-LF
SERIES
DIP 180°
HIGH 3.0mm
LEADFREE
1X02:02 WAY
1X40:40 WAY
DIP 3.0mm
CONTACT 5.0mm
GOLD PLATE

DESCRIPTION: 2.54mm Pitch SIP Adapters DIP Pin Length 11.0mm