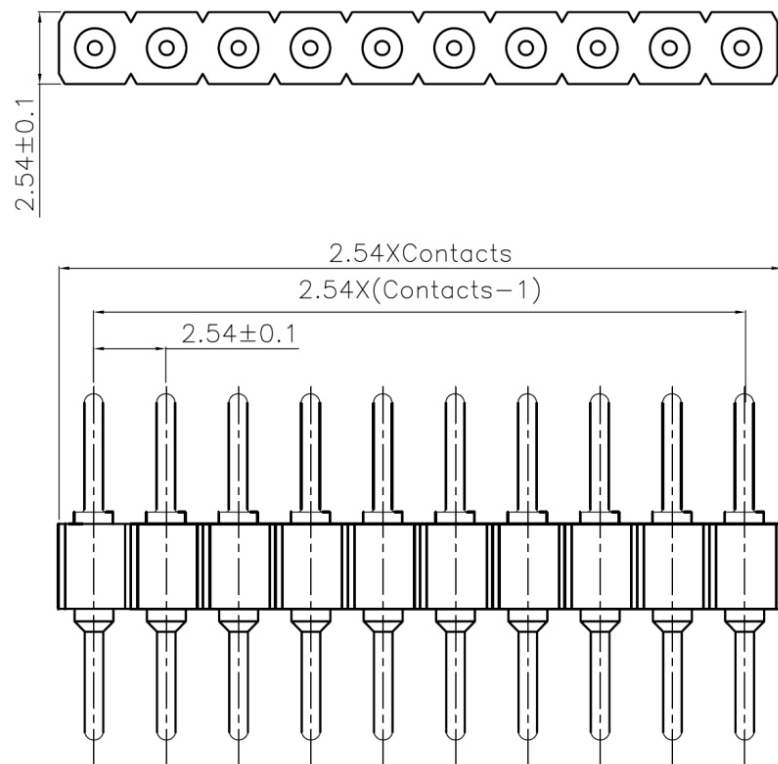


PCB Layout

Specifications:

Current Rating:3.0A AC/DC

Voltage Rating:100V AC/DC

Contact Resistance:10m ohm. Max.

Insulation Resistance:5,000M ohm. Min.

Withstanding Voltage:1,000V AC For One Minute

Operating Temperature Range:-40°C ~ +105°C

Material and Finish

Insulator:High Temperature Plastic(PPS UL94V-0)

Contact:Copper Alloy

Plating:Gold Plated

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

ORDER INFORMATION

SP12-Dx6565-1Xxx-LF

SERIES

LEADFREE

2X02:02WAY

2X40:40WAY

Ø0.65 x Ø0.65

DIP 180°

G:GOLD PLATED

T:TIN PLATED

DESCRIPTION: