


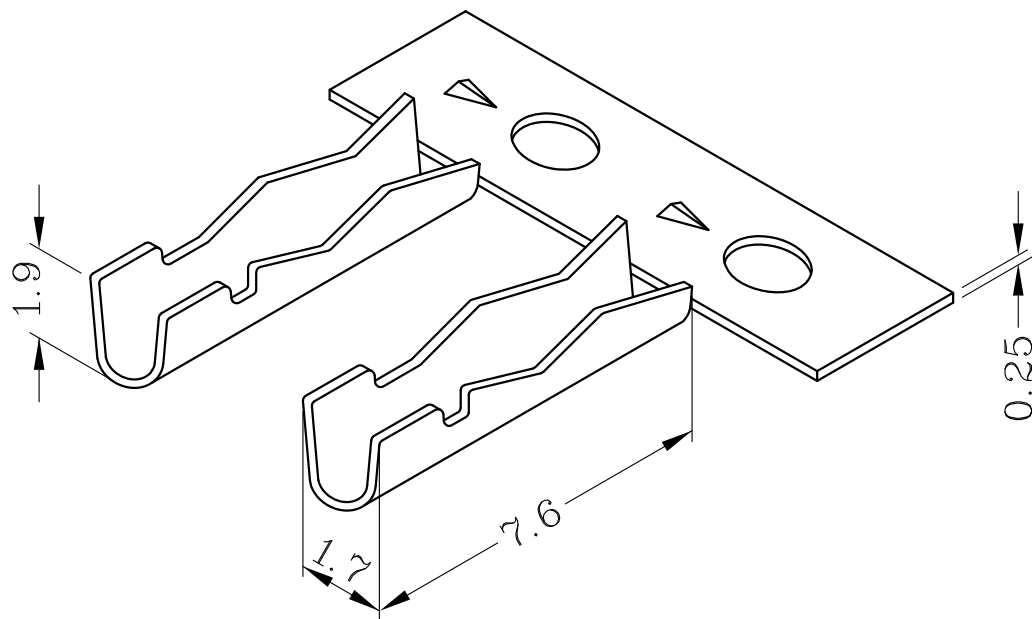

NOTE:

1. 表面處理

鍍錫 40u" 以上

1.SURFACE TREATMENT:

TIN PLATING

THICKNESS MORE THAN 40u"

金線端	① T	鍍 錫
內料帶	① B	TIN PLATING
		素材
		NONE
ITEM NO.	PART NO.	FINISH

材 質	一般公差	X : ±0.5	X.XXX : ±0.05	比例
MATERIAL	GENERAL TOLERANCE	X.X : ±0.3	ANGLES ±3°	SCALE
		X.XX : ±0.1		
料 厚	包裝數量	20000	適用電線	24~20
THICKNESS	PACKING Q'TY	PCS/R	WIRE RANGE	
間 距	對 手 件	TAB:		
PITCH	MATING PART			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SPT-07x-20-LF
SERIES T LEADFREE
20~24AWG
T:TIN
B:BRASS
LONG 7.6mm

DESCRIPTION: