




6 finger

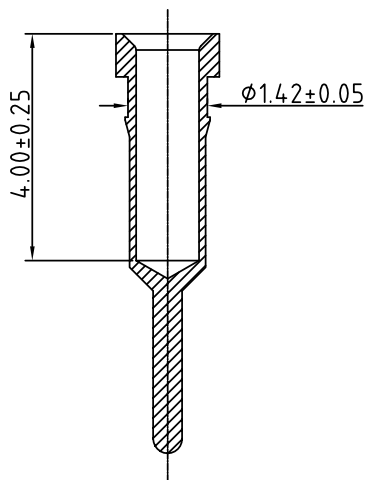

4 finger

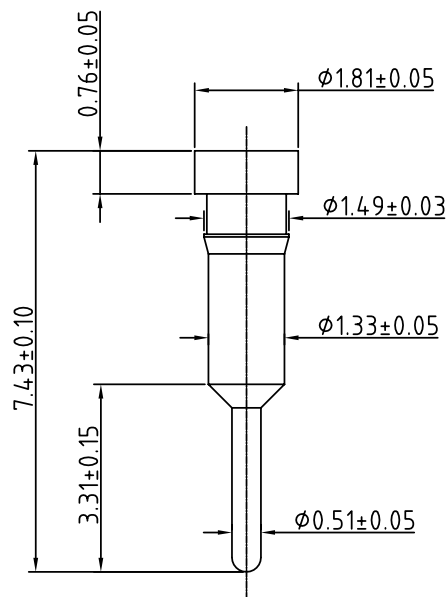

Technical Data

Material:

- Pin (outer sleeve) : Brass, machined, CuZn38Pb2
- Clip(contact 4/6 finger): Beryllium copper, heat treated or PHBZ
- Plating(outer sleeve) : Tin plated : $2\mu\text{m}/80\text{u}''\text{nickel}$, $5\mu\text{m}/200\text{u}''\text{Tin}$
- Gold plated : $2\mu\text{m}/80\text{u}''\text{nickel}$, Full gold flash
- Plating(contact) : $2\mu\text{m}/80\text{u}''\text{nickel}$, gold or Tin plating(See TABLE)

Electrical

- Current rating : 3 Amps/contact max.
- Current resistance : $<4\text{m}\Omega$ /contact.

Mechanical

- Average insertion force with steel pin of $\phi 0.43\text{mm}/0.017''$: Ω
- 4-finger > 250g. 6-finger > 80g
- Average withdrawal force with steel pin of $\phi 0.43\text{mm}/0.017''$: Ω
- 4-finger > 50g. 6-finger > 15g
- Mechanical life: min. 200

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.10

.XXX $\pm$

ANG $\pm 1^\circ$

PPOJECTION

照片框

ORDER INFORMATION

SS-D-0.43-LF
SERIES | LEADFREE
180° | PIN 0.43mm

DESCRIPTION: