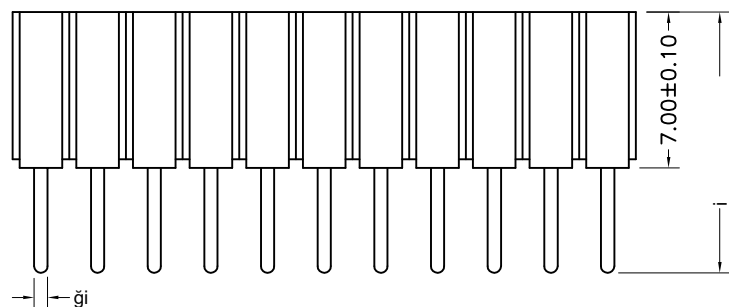
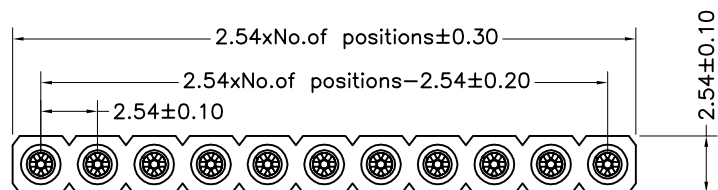


Recommended P.C.B
Layout (±0.05)

Technical Data

Pin(outer sleeve):Brass,machined CuZn38Pb2

Clip(Contact 6 Flnger):Beryllium copper,heat teated

Insulator:PPS UL94V-0 colour:black

Current rating:3Amps

Mating pin ϕ :0.635/0.889mm

Forces:(polished steel gauge ϕ 0.66mm)

Mechanical life:min 500cycles

Contact resistance:max 20m Ω

Dielectric strength:min 1000V RMS

Operaling temperature:-40° C to+105° C

Soldering temperature:+255° C

Pin Plated:Tin

Clip Plated:G/F

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.15
ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

SS-D7047-1Xxx-LF
SERIES
LEADFREE
1X02:02WAY
1X40:40WAY
DIP 4.7mm
HIGH 7.0mm
DIP 180°

DESCRIPTION: