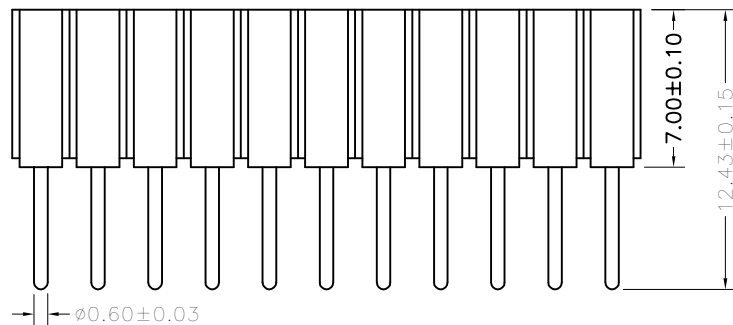
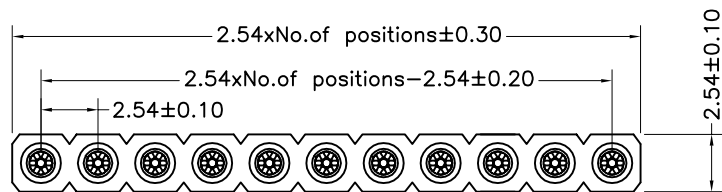


Recommended P.C.B
Layout(±0.05)

Technical Data

Pin(outer sleeve):Brass,machined CuZn38Pb2

Clp(Contact 6 Finger):Beryllium copper,heat teated

Insulator:PPS UL94V-0 colour:black

Current rating:3Amps

Mating pin ϕ :0.635/0.889mm

Forces:(polished steel gauge ϕ 0.66mm)

-Insertion:1.2N typ

-Withdrawal:0.6N typ

Mechanical life:min 500cycles

Contact resistance:max 10m Ω

Dielectric strength:min 1000V RMS

Operating temperature:-40°C to+105°C

Soldering temperature:+255°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.15
ANG $\pm$ 5°

照片框

ORDER INFORMATION

SS-D7054-1Xxx-LF
SERIES
LEADFREE
1X02:02WAY
1X40:40WAY
DIP 5.43mm
HIGH 7.0mm
DIP 180°

DESCRIPTION: