
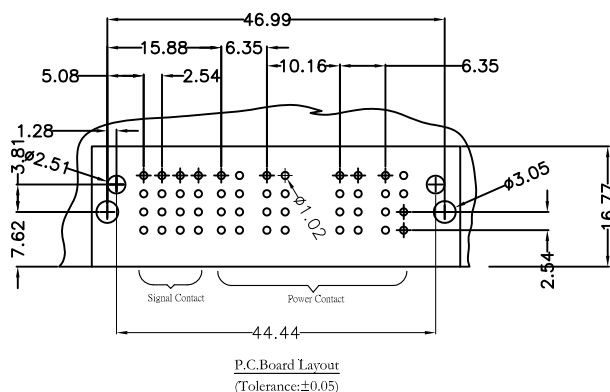


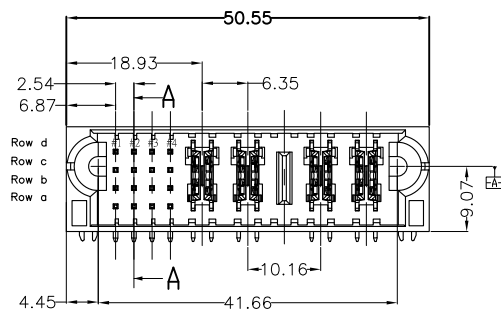


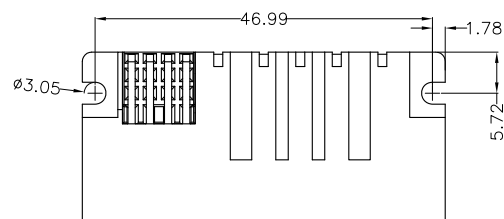

Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: Signal Pin: 2.5 AMP .

Power Pin: 90 AMP All Pin.

Dielectric Withstanding Voltage:

Signal Pin DC 1000V For 1 minute.

Power Pin DC 2500V For 1 minute.

Insulator Resistance: Signal Pin 500mΩ max.

Power Pin 1000mΩ max.

Contact Resistance: Signal Pin 20mΩ max.

Power Pin 10mΩ max.

Operating Temperature: -20°C ~+85°C .

*RoHS Compliant

Notes 1 :

H: High density Power---PCB Mount 5.08mm Pitch

P: DC Power---PCB Mount 6.35mm Pitch

A: AC Power---PCB Mount 7.62mm Pitch

S: Signal---PCB Mount 2.54mm Pitch

Notes 2 :

a4 , d2 Contact Length is 5.59mm.

Other Pin Contact Length is 6.86mm.

ROWS		SIGNAL			POWER					
		1	2	3	P1	P2	P3	P4	P5	
D		G	G	G						
C		G	G	G						
B		G	G	G	MS	MS		MS	MS	
A	HD	G	G	G						HD

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

SSI-PRZ-0+16+4-LF

SERIES

CLIP

DIP 90°

MALE

LEADFREE

0+16+4 WAY

DESCRIPTION: Male Right-angle Dip Type