


Section: A-A
Scale: 1:1

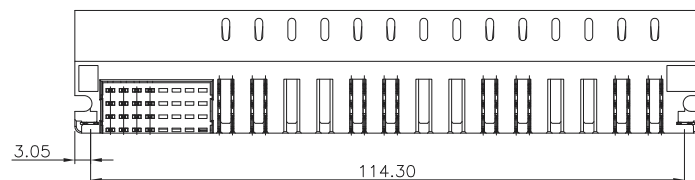

Material and Plating:

Housing: LCP, UL94V-0, Black.

Power Contacts: High Conductivity Copper .
30u" Au+Pd/Ni on Contact Area and 80u" Min Tin Plated on Solder Tail over Nickel 50u" Min .

Signal Contacts : Brass

30u" Au+Pd/Ni on Contact Area and 80u" Min Tin Plated on Solder Tail over Nickel 50u" Min .

Lock : Phosphor Bronze

Electrical Characteristics:

Current Rating: Signal Pin: 2.5 A.

Power Pin: 65A(2oz x 6).

Dielectric Withstanding Voltage:

Signal Pin DC 1000V For 1 minute.

Power Pin DC 2500V For 1 minute.

Insulator Resistance: Signal Pin 500MΩ max.

Power Pin 1000MΩ max.

Contact Resistance: Signal Pin 20mΩ max at DC 20mA.

Power Pin 0.7mΩ max at DC 20mA.

Operating Temperature: -40°C ~+125°C .

Note :

P3,P4,P7,P8,P11,P12:Without Power Contact

D5,C5,B5,A5,D6,C6,B6,A6,D7,C7,B7,A7,D8,C8,B8,A8:Without Signal Contact

	SIGNAL								POWER														ROWS
	1	2	3	4	5	6	7	8	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	
GGGG									MS	MS			MS	MS			MS	MS			MS	MS	D
GGGG																							C
GGGG																							B
GGGG																							A

SIGNAL PIN CONTACT LENGTH 4.32mm	H
SIGNAL PIN CONTACT LENGTH 5.59mm	E
SIGNAL PIN CONTACT LENGTH 7.05mm	F
SIGNAL PIN CONTACT LENGTH 6.86mm	G
HOT PLUG POWWR CONTACT, STD	MS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XXX ± 0.15

DATE

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

SSI-PRZ-0+32+14-LF

SERIES

CLIP


DIP 90°

MALE

0+32+14 WAY

LEADFREE

DESCRIPTION: Male Right-angle Dip Type

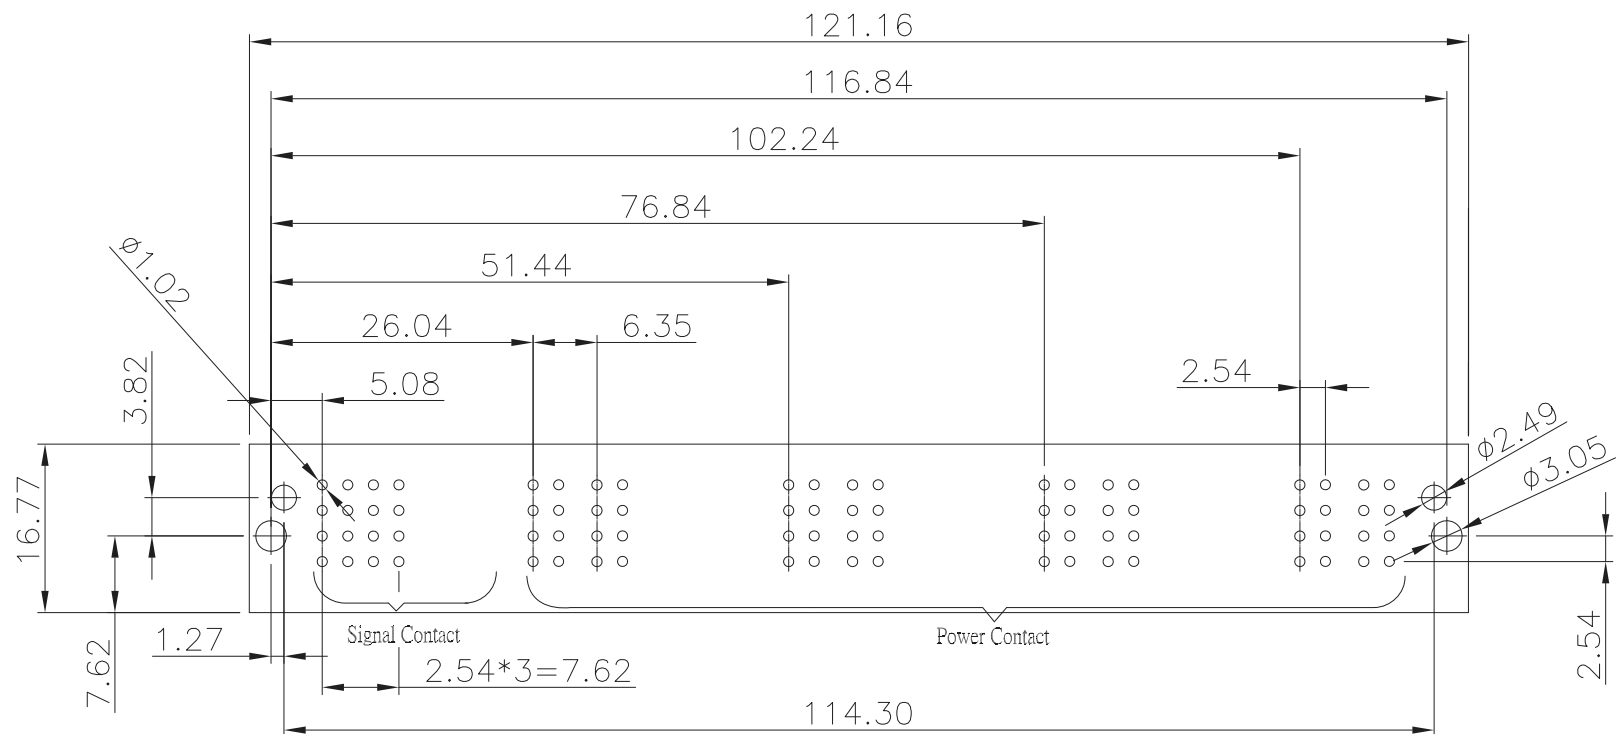

P.C.Board Layout
(Tolerance: ± 0.05)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

SSI-PRZ-0+32+14-LF

SERIES

CLIP

DIP 90°

MALE

0+32+14 WAY

LEADFREE

DESCRIPTION: Male Right-angle Dip Type