
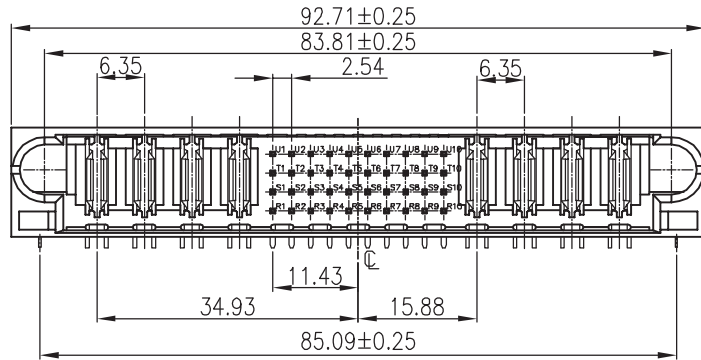
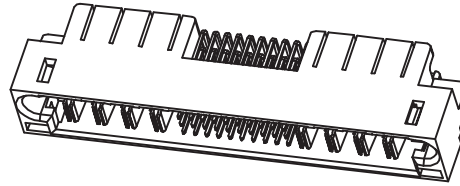
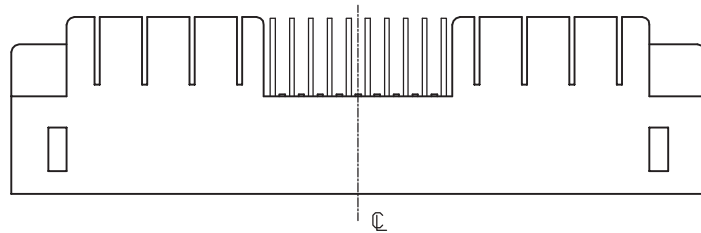


NOTES :

1. MATERIAL :
INSULATOR : GLASS FILLED POLYESTER, UL 94 V-O RATED OR OTHER EQUIVALENT RESINS.
TERMINAL : COPPER ALLOY
2. FINISH: GOLD PLATING IN THE CONTACT AREA AND SELECTIVE PLATING IN THE SOLDER TAIL AREA WITH 50u"(min.) NICKEL UNDERPLATING OVERALL.
3. ELECTRICAL CHARACTERISTIC :
(1) Operating Temperature :
105(max.) Degree C
(2) Current Rating :
Power Contact: 30A 600Vac
Signal Contact: 1A 600Vac
(3) Insulation Resistance :
Power Contact: 1000 megohms(500 volt direct current)
Signal Contact: 500 megohms(500 volt direct current)

	R1/R10	Ux/Tx/Sx/Rx
TYPE1	5.6mm	6.8mm

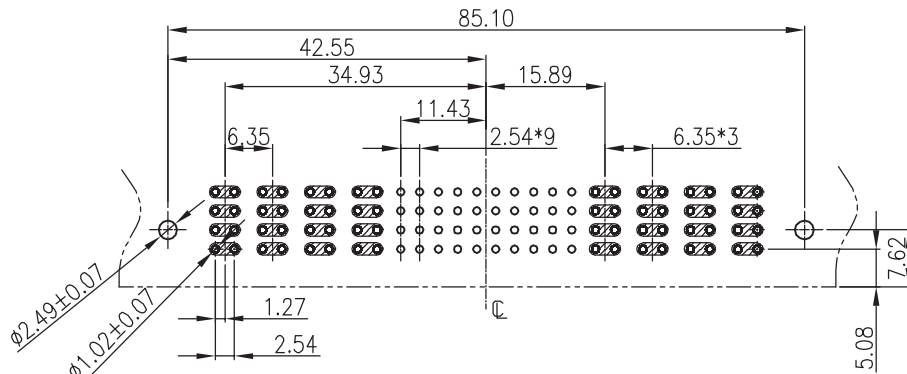

RECOMMEND P.C.BOARD LAYOUT
(COMPONENT SIDE PCB:1.60mm)
TOLERANCE:±0.05mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm

SCALE 1:1

DATE

SIZE A4


PPOJECTION

X. ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

SSI-PRZ-4+40+4-LF



DESCRIPTION: HIGH POWER CONNECTOR PLUG