
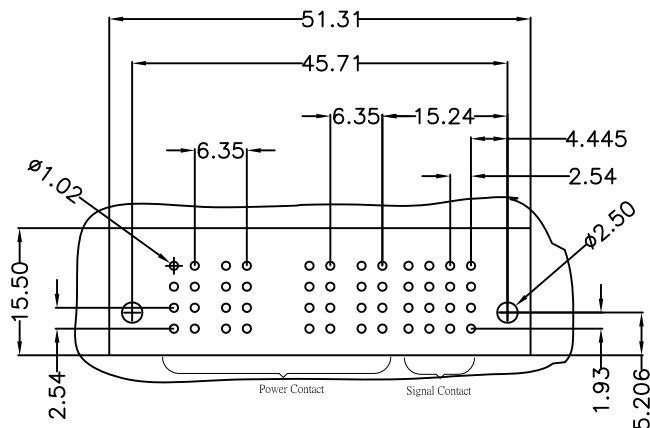


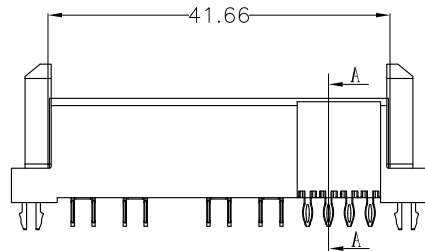


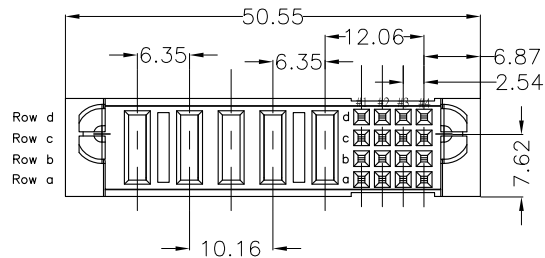

P.C.Board Layout
(Tolerance:±0.05)

Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: Signal Pin: 2.5 AMP .

Power Pin: 90 AMP All Pin.

Dielectric Withstanding Voltage:

Signal Pin DC 1000V For 1 minute.

Power Pin DC 2500V For 1 minute.

Insulator Resistance:

Signal Pin 500mΩ max.

Power Pin 1000mΩ max.

Contact Resistance:

Signal Pin 20mΩ max.

Power Pin 10mΩ max.

Operating Temperature: -20°C ~+85°C .

*RoHS Compliant

Notes :

H: High density Power---PCB Mount 5.08mm Pitch

P: DC Power---PCB Mount 6.35mm Pitch

A: AC Power---PCB Mount 7.62mm Pitch

S: Signal---PCB Mount 2.54mm Pitch

ROWS		POWER					SIGNAL			
		P1	P2	P3	P4	P5	4	3	2	1
D		FM	FS		FS	FS	LLLL	LLLL	LLLL	LLLL
C							LLLL	LLLL	LLLL	LLLL
B							LLLL	LLLL	LLLL	LLLL
A							LLLL	LLLL	LLLL	LLLL

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XXX ±

DATE

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

SSI-SPZ-0+16+4-LF

SERIES
CLIP
PRESS FIT
FEMALE
0+16+4 WAY
LEADFREE

DESCRIPTION: Female Straight Press Fit Type

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com